

2016
RANGE



 **IDEAL**
BIKES

2016 RANGE



INDEX

MOUNTAIN BIKES 29"

- 06 RACE PRO
- 07 TRAXER
- 08 BOOMMAX
- 09 HILLMASTER
- 10 ZIGZAG
- 11 PRO RIDER
- 12 STROBE

MOUNTAIN BIKES 27.5"

- 14 RACE PRO
- 15 TRAXER
- 16 BOOMMAX
- 17 HILLMASTER
- 18 ZIGZAG
- 19 PRO RIDER
- 20 STROBE
- 21 FREEDER
- 22 TRIAL

MOUNTAIN BIKES 26"

- 24 FREEDER
- 25 TRIAL

FULL SUSPENSION

- 28 VSR COMP 27.5
- 29 VSR COMP 26

TREKKING OFF ROAD

- 32 INTEGRATOR
- 33 ERGOMAX
- 34 OPTIMUS
- 35 OPTIMUS L
- 36 MEGISTO
- 37 MEGISTO L
- 38 CROSSMO
- 39 NERGETIC
- 40 MOOVIC
- 41 MOOVIC L

SPORT TOURING

- 44 MULTIGO
- 46 TRAVELON
- 48 EZIGO
- 50 COMFORT

URBAN CITY

- 54 FUNCORE
- 55 CITYRUN
- 56 CITYLIFE
- 57 CITYCOM

PEDELECS

- 60 ORAMA 323-DC8
- 62 ORAMA 353-D8
- 64 ORAMA 323-C7
- 66 ORAMA 420-E9

ROAD

- 70 STAGE TEAM Di2
- 71 STAGE TEAM ULTEGRA
- 72 STAGE TEAM105
- 73 STAGE COMP 105 22sp
- 74 STAGE COMP 105 20sp
- 75 STAGE COMP Tiagra
- 76 STAGE105
- 77 STAGE Tiagra
- 78 ONROAD
- 79 INTEMPO
- 80 STREAMLITE

JUNIOR

- 82 STROBE 24 Disc
- 83 STROBE 24
- 84 STROBE 20
- 85 CONDOR 20
- 86 V-TRACK 12/14/16/18





MOUNTAIN BIKES 29"


RACE PRO 29

22sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, carbon, tapered head tube, press fit BB, 12 mm through axle |
| Size | 43/48/53 cm |
| Fork | FOX 32 Float 29, 100 mm, tapered steerer, 15 mm QR, air, adjustable air spring and damping |
| Front derailleur | Shimano Deore XT, FDM8020 |
| Rear derailleur | Shimano Deore XT Shadow PLUS, RDM8000DGS |
| Shifter | Shimano Deore XT, SLM8000 |
| Bottom bracket | Shimano BB-MT800-PA |
| Crank set | Shimano Deore XT, FCM8000, 36-26T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano Deore XT, CSM8000, 11-13-15-17-19-21-24-27-31-35-40T |
| Chain | Shimano Deore XT, CNHG600 |
| Front hub | Shimano Deore XT wheel set, WHM8000 |
| Rear hub | Shimano Deore XT wheel set, WHM8000 |
| Rims | Shimano Deore XT wheel set, WHM8000 |
| Tires | Kenda K1047 Small Block Eight Pro SCT, 51-622 (29*2.10) 120Tpi |
| Brakes | Shimano Deore XT disc brake, BR-M8000/BL-M8000, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia SL-X-CROSS |

Frame Geometry Chart

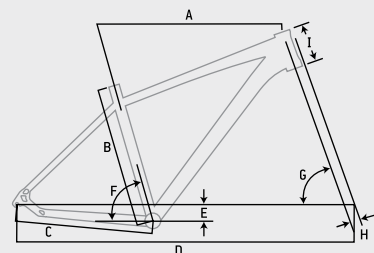

| FRAME SIZE | M | L | XL | |
|------------|---------------------|--------|--------|--------|
| | A | 430 | 480 | 530 |
| A | TOP TUBE (parallel) | 595 | 615 | 630 |
| B | SEAT TUBE | 430 | 480 | 530 |
| C | REAR CENTER | 445 | 445 | 445 |
| D | WHEEL BASE | 1117.7 | 1132.8 | 1148.3 |
| E | BB DROP | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 69°30' | 69°30' | 69°30' |
| H | OFFSET | 51 | 51 | 51 |
| I | HEAD TUBE | 110 | 120 | 130 |


TRAXER 29

22sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, AL6061-T4/T6, tapered HT, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | FOX 32 Float 29, 100 mm, tapered steerer, 15 mm QR, air, adjustable air spring and damping |
| Front derailleur | Shimano Deore XT, FDM8020 |
| Rear derailleur | Shimano Deore XT Shadow PLUS, RDM8000DGS |
| Shifter | Shimano Deore XT, SLM8000 |
| Bottom bracket | Shimano Deore XT, FCM8000 |
| Crank set | Shimano Deore XT, FCM8000, 36-26T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano Deore XT, CSM8000, 11-13-15-17-19-21-24-27-31-35-40T |
| Chain | Shimano Deore XT, CNHG600 |
| Front hub | Shimano Deore XT, HBM8010 |
| Rear hub | Shimano Deore XT, FHM8000 |
| Rims | Mach-1 Karma Disc, 622*21C |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) 30tpi |
| Brakes | Shimano Deore XT disc brake, BR-M8000/BL-M8000, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

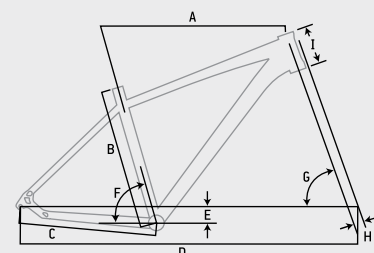

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 400 | 440 | 480 | 520 | 560 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 440 | 440 | 440 | 440 | 440 |
| D | WHEEL BASE | 1067.2 | 1077.2 | 1097.2 | 1117.4 | 1127.6 |
| E | BB DROP | 60 | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 72.5° | 72.5° | 72.5° | 72.5° | 72.5° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° | 71° |
| H | OFFSET | 42 | 42 | 42 | 42 | 42 |
| I | HEAD TUBE | 105 | 105 | 110 | 120 | 130 |


BOOMMAX 29

30sp



| | |
|--------------------------|---|
| Frame | Hardtail 29, AL6061-T4/T6, tapered HT, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Omega-29-RL, 100 mm, remote lock out, adjustable preload and damping |
| Front derailleur | Shimano Deore, FDM610 |
| Rear derailleur | Shimano Deore XT Shadow, RDM781-SGS |
| Shifter | Shimano Deore, SLM610 |
| Bottom bracket | Shimano SM-BB52 |
| Crank set | Shimano FCM622, 40-30-22T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG50, 11-13-15-17-19-21-24-28-32-36T |
| Chain | Shimano CNHG54 |
| Front hub | Shimano Acera, HBM3050 |
| Rear hub | Shimano Acera, FHM3050 |
| Rims | Mach-1 Karma Disc, 622*21C |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) 30tpi |
| Brakes | Shimano BR-M395/BL-M396 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

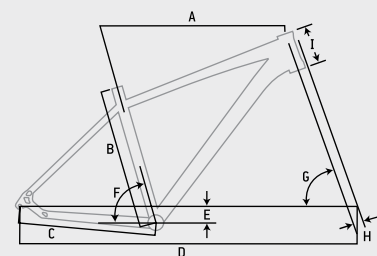

| FRAME SIZE | S | M | L | XL | XXL |
|------------|--------|--------|--------|--------|--------|
| A | 400 | 440 | 480 | 520 | 560 |
| B | 590 | 600 | 620 | 640 | 650 |
| C | 400 | 440 | 480 | 520 | 560 |
| D | 440 | 440 | 440 | 440 | 440 |
| E | 1067.2 | 1077.2 | 1097.2 | 1117.4 | 1127.6 |
| F | 60 | 60 | 60 | 60 | 60 |
| G | 72.5° | 72.5° | 72.5° | 72.5° | 72.5° |
| H | 71° | 71° | 71° | 71° | 71° |
| I | 42 | 42 | 42 | 42 | 42 |
| I | 105 | 105 | 110 | 120 | 130 |


HILLMASTER 29

30sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Blaze-29-RL, 100 mm, remote lock out, adjustable preload and damping |
| Front derailleur | Shimano Deore, FDM610 |
| Rear derailleur | Shimano Deore Shadow, RDM610SGS |
| Shifter | Shimano Deore, SLM610 |
| Bottom bracket | Shimano BBES300 |
| Crank set | Shimano FCM523, 40-30-22T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG50, 11-13-15-17-19-21-24-28-32-36T |
| Chain | Shimano CNHG54 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHXT505 |
| Rims | Cross X-6, 622-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) 30tpi |
| Brakes | Shimano BR-M395/BL-M396 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

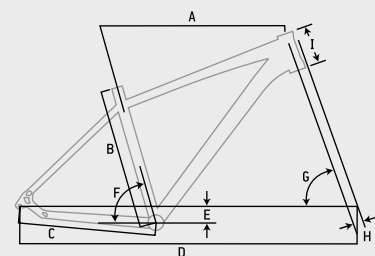

| FRAME SIZE | S | M | L | XL | XXL |
|-----------------------|--------|--------|--------|--------|--------|
| A TOP TUBE (parallel) | 400 | 440 | 480 | 520 | 560 |
| B SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D WHEEL BASE | 1076.2 | 1086.2 | 1107.3 | 1127.5 | 1137.4 |
| E BB DROP | 60 | 60 | 60 | 60 | 60 |
| F SEAT ANGLE | 74° | 74° | 74° | 74° | 74° |
| G HEAD ANGLE | 71° | 71° | 71° | 71° | 71° |
| H OFFSET | 42 | 42 | 42 | 42 | 42 |
| I HEAD TUBE | 110 | 110 | 120 | 130 | 140 |


ZIGZAG 29

27sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Blaze-29-ML, 100 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano Acera, FDM3000 |
| Rear derailleur | Shimano Acera, RDM3000SGS |
| Shifter | Shimano Altus, SLM370 |
| Bottom bracket | Shimano BBES300 |
| Crank set | Shimano Acera, FCM3000, 40-30-22T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG300, 11-13-15-17-20-23-26-30-34T |
| Chain | Shimano CNHG53 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 68 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

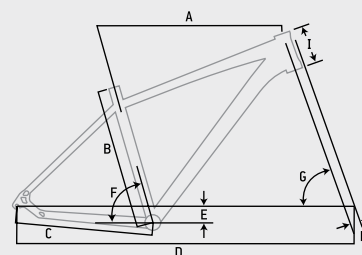

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 570 | 580 | 600.5 | 620 | 630 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1076.2 | 1086.2 | 1107.3 | 1127.5 | 1137.4 |
| E | BB DROP | 60 | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 74° | 74° | 74° | 74° | 74° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° | 71° |
| H | OFFSET | 42 | 42 | 42 | 42 | 42 |
| I | HEAD TUBE | 110 | 110 | 120 | 130 | 140 |


PRO RIDER 29

24sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Blaze-29-ML, 100 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY700 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano SLM310 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 42-34-24T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG41, 11-13-15-17-20-23-26-34T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 68 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Viper |

Frame Geometry Chart

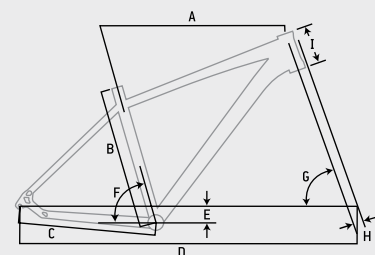

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 570 | 580 | 600.5 | 620 | 630 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1076.2 | 1086.2 | 1107.3 | 1127.5 | 1137.4 |
| E | BB DROP | 60 | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 74° | 74° | 74° | 74° | 74° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° | 71° |
| H | OFFSET | 42 | 42 | 42 | 42 | 42 |
| I | HEAD TUBE | 110 | 110 | 120 | 130 | 140 |


STROBE 29

24sp



| | |
|--------------------------|--|
| Frame | Hardtail 29, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | ZOOM 565D, 80 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY700 |
| Rear derailleur | Shimano Altus, RDM310 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 42-34-24T, <=48 cm 170 mm - else 175mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-17-20-23-26-34T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 51-622 (29*2.10) |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Viper |

Frame Geometry Chart

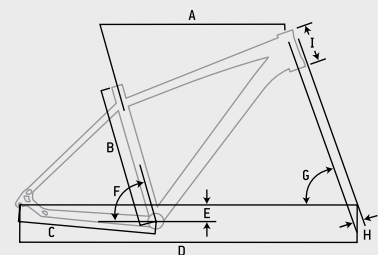

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 570 | 580 | 600.5 | 620 | 630 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1076.2 | 1086.2 | 1107.3 | 1127.5 | 1137.4 |
| E | BB DROP | 60 | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 74° | 74° | 74° | 74° | 74° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° | 71° |
| H | OFFSET | 42 | 42 | 42 | 42 | 42 |
| I | HEAD TUBE | 110 | 110 | 120 | 130 | 140 |



MOUNTAIN BIKES 27.5"


RACE PRO 27.5

22sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, carbon, tapered head tube, press fit BB, 12 mm through axle |
| Size | 43/48/53 cm |
| Fork | FOX 32 Float 27.5, 100 mm, tapered steerer, 15 mm QR, air, adjustable air spring and damping |
| Front derailleur | Shimano Deore XT, FDM8020 |
| Rear derailleur | Shimano Deore XT Shadow PLUS, RDM8000DGS |
| Shifter | Shimano Deore XT, SLM8000 |
| Bottom bracket | Shimano BB-MT800-PA |
| Crank set | Shimano Deore XT, FCM8000, 38-28T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano Deore XT, CSM8000, 11-13-15-17-19-21-24-27-31-35-40T |
| Chain | Shimano Deore XT, CNHG600 |
| Front hub | Shimano Deore XT wheel set, WHM8000 |
| Rear hub | Shimano Deore XT wheel set, WHM8000 |
| Rims | Shimano Deore XT wheel set, WHM8000 |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano Deore XT disc brake, BR-M8000/BL-M8000, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia SL-X-CROSS |

Frame Geometry Chart

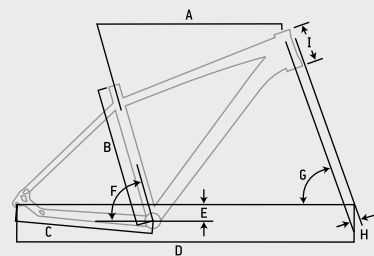

| FRAME SIZE | | M | L | XL |
|------------|---------------------|--------|--------|-------|
| A | TOP TUBE (parallel) | 430 | 480 | 530 |
| B | SEAT TUBE | 580 | 595 | 610 |
| C | REAR CENTER | 430 | 430 | 430 |
| D | WHEEL BASE | 10718 | 1090.4 | 11028 |
| E | BB DROP | 45 | 45 | 45 |
| F | SEAT ANGLE | 73°30' | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° |
| H | OFFSET | 42 | 42 | 42 |
| I | HEAD TUBE | 120 | 130 | 140 |


TRAXER 27.5

22sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, AL6061-T4/T6, tapered HT, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | FOX 32 Float 27.5, 100 mm, tapered steerer, 15 mm QR, air, adjustable air spring and damping |
| Front derailleur | Shimano Deore XT, FDM8020 |
| Rear derailleur | Shimano Deore XT Shadow PLUS, RDM8000DGS |
| Shifter | Shimano Deore XT, SLM8000 |
| Bottom bracket | Shimano Deore XT, FCM8000 |
| Crank set | Shimano Deore XT, FCM8000, 38-28T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano Deore XT, CSM8000, 11-13-15-17-19-21-24-27-31-35-40T |
| Chain | Shimano Deore XT, CNHG600 |
| Front hub | Shimano Deore XT, HBM8010 |
| Rear hub | Shimano Deore XT, FHM8000 |
| Rims | Mach-1 Karma Disc, 584*21C |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano Deore XT disc brake, BR-M8000/BL-M8000, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

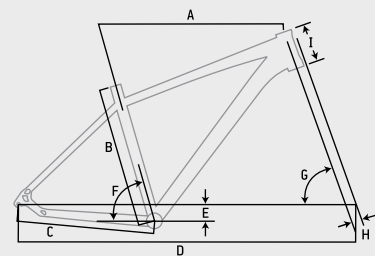

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|------|--------|--------|--------|
| A | TOP TUBE (parallel) | 400 | 440 | 480 | 520 | 560 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1050.6 | 1071 | 1091.5 | 1111.9 | 1132.4 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 100 | 110 | 120 | 130 | 140 |


BOOMMAX 27.5

30sp



| | |
|--------------------------|---|
| Frame | Hardtail 27.5, AL6061-T4/T6, tapered HT, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Omega-27.5-RL, 100 mm, remote lock out, adjustable preload and damping |
| Front derailleur | Shimano Deore, FDM610 |
| Rear derailleur | Shimano Deore XT Shadow, RDM781-SGS |
| Shifter | Shimano Deore, SLM610 |
| Bottom bracket | Shimano SM-BB52 |
| Crank set | Shimano FCM552, 42-32-24T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG50, 11-13-15-17-19-21-24-28-32-36T |
| Chain | Shimano CNHG54 |
| Front hub | Shimano Acera, HBM3050 |
| Rear hub | Shimano Acera, FHM3050 |
| Rims | Mach-1 Karma Disc, 584*21C |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano BR-M395/BL-M396 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

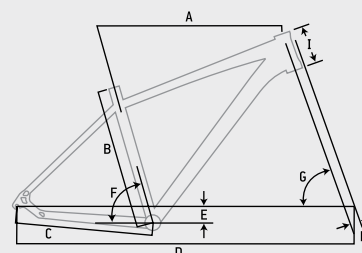

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|------|--------|--------|--------|
| A | TOP TUBE (parallel) | 560 | 580 | 600 | 620 | 640 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1050.6 | 1071 | 1091.5 | 1111.9 | 1132.4 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| 1 | HEAD TUBE | 100 | 110 | 120 | 130 | 140 |


HILLMASTER 27.5

30sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Blaze-27.5-RL, 100 mm, remote lock out, adjustable preload and damping |
| Front derailleur | Shimano Deore, FDM610 |
| Rear derailleur | Shimano Deore Shadow, RDM610SGS |
| Shifter | Shimano Deore, SLM610 |
| Bottom bracket | Shimano BBES300 |
| Crank set | Shimano FCM522, 42-32-24T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG50, 11-13-15-17-19-21-24-28-32-36T |
| Chain | Shimano CNHG54 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 584-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano BR-M395/BL-M396 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 72 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

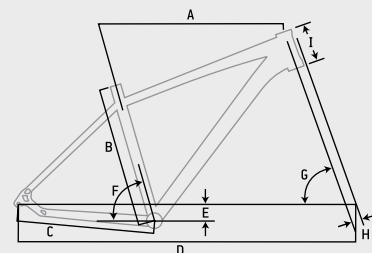

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 560 | 580 | 600 | 620 | 640 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1052.7 | 1072.7 | 1093.3 | 1113.8 | 1134.4 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 110 | 120 | 120 | 130 | 140 |


ZIGZAG 27.5

27sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, AL6061-T4/T6, formed tubes, internal gear cables. UNI bent top tube version available |
| Size | 40/44/48/52/56 cm, UNI Bend 36/40/44/48/52 cm |
| Fork | RST Blaze-27.5-ML, 100 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano Acera, FDM3000 |
| Rear derailleur | Shimano Acera, RDM3000SGS |
| Shifter | Shimano Altus, SLM370 |
| Bottom bracket | Shimano BBES300 |
| Crank set | Shimano Acera, FCM3000, 40-30-22T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG300, 11-13-15-17-20-23-26-30-34T |
| Chain | Shimano CNHG53 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 584-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 54-584 [27.5x2.20] |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 68 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-X-CROSS |

Frame Geometry Chart

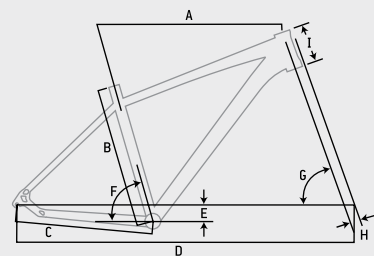

| | FRAME SIZE | XS | S | M | L | XL | XXL |
|---|---------------------|-------|-------|-------|-------|-------|-------|
| | | 360 | 400 | 440 | 480 | 520 | 560 |
| A | TOP TUBE (parallel) | 560 | 560 | 580 | 600 | 620 | 640 |
| B | SEAT TUBE | 360 | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 10527 | 10527 | 10727 | 10933 | 11138 | 11344 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 110 | 110 | 120 | 120 | 130 | 140 |


PRO RIDER 27.5

24sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, AL6061-T4/T6, formed tubes, internal gear cables |
| Size | 40/44/48/52/56 cm |
| Fork | RST Blaze-27.5-ML, 100 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY700 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano SLM310 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 42-34-24T, <=48 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CS-HG41, 11-13-15-17-20-23-26-34T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 584-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 54-584 [27.5x2.20] |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 68 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Viper |

Frame Geometry Chart

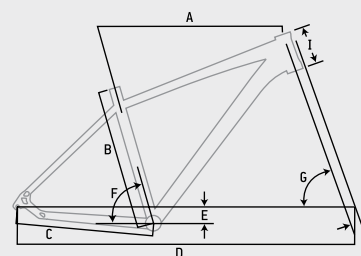

| FRAME SIZE | S | M | L | XL | XXL |
|------------|--------|--------|--------|--------|--------|
| A | 400 | 440 | 480 | 520 | 560 |
| B | 560 | 580 | 600 | 620 | 640 |
| C | 400 | 440 | 480 | 520 | 560 |
| D | 430 | 430 | 430 | 430 | 430 |
| E | 1052.7 | 1072.7 | 1093.3 | 1113.8 | 1134.4 |
| F | 45 | 45 | 45 | 45 | 45 |
| G | 73° | 73° | 73° | 73° | 73° |
| H | 70° | 70° | 70° | 70° | 70° |
| I | 44 | 44 | 44 | 44 | 44 |
| | 110 | 120 | 120 | 130 | 140 |


STROBE 27.5

24sp



| | |
|--------------------------|--|
| Frame | Hardtail 27.5, AL6061-T4/T6, formed tubes, internal gear cables, UNI bent top tube version available |
| Size | 40/44/48/52/56 cm, UNI Bend 36/40/44/48/52 cm |
| Fork | ZOOM 565D, 80 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FD TY700 |
| Rear derailleur | Shimano Altus, RDM310 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 42-34-24T, <=48 cm 170 mm - else 175mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-17-20-23-26-34T |
| Chain | KMC Z7 |
| Front hub | Shimano HB TX505 |
| Rear hub | Shimano FH TX505 |
| Rims | Cross X-6, 584-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Viper |

Frame Geometry Chart

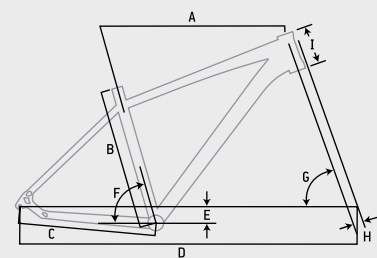

| FRAME SIZE | | XS | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 360 | 400 | 440 | 480 | 520 | 560 |
| B | SEAT TUBE | 360 | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1052.7 | 1052.7 | 1072.7 | 1093.3 | 1113.8 | 1134.4 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 110 | 110 | 120 | 120 | 130 | 140 |


FREEDER 27.5

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 27.5, AL6061-T4/T6 |
| Size | 40/44/48/52/56 cm |
| Fork | ZOOM 386A, 60 mm, adjustable preload |
| Front derailleur | Shimano Tourney, FDTY700 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Dotek, 42-34-24T, <=48 cm 170 mm - else 175mm |
| Cassette sprocket | Shimano CSHG20, 12-14-16-18-21-26-32T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Shimano FHRM30 |
| Rims | Mach-1 Eco ER-10, 584*19C |
| Tires | Kenda K1104A 50/FIFTY, 51-584 (27.5x2.10) |
| Brakes | Promax DSK-320 Mechanical Disc Brakes, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 9°, rise 30 mm, 25.4 mm |
| Stem | ID PROJECT, 90 mm, 15° |
| Seat post | ID PROJECT, 24 mm offset, 27.2*350 mm |
| Saddle | Selle Royal RVS Alpine |
| Kickstand | Center kickstand |

Frame Geometry Chart

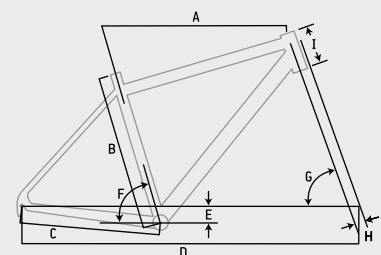

| | FRAME SIZE | S | M | L | XL | XXL |
|---|---------------------|--------|--------|--------|--------|--------|
| | | 400 | 440 | 480 | 520 | 560 |
| A | TOP TUBE (parallel) | 560 | 580 | 600 | 620 | 640 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1052.7 | 1072.7 | 1093.3 | 1113.8 | 1134.4 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 110 | 120 | 120 | 130 | 140 |


TRIAL 27.5

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 27.5, AL6061-T4/T6 |
| Size | 40/44/48/52/56 cm |
| Fork | ZOOM 386A, 60 mm, adjustable preload |
| Front derailleur | Shimano Tourney, FDTY10 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Dotek, 42-34-24T, 170 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 584*19C |
| Tires | Kenda K1104A 50/FIFTY, 51-584 (27.5x2.10) |
| Brakes | Saccon V-brake |
| Handlebar | ID PROJECT, riser bar, 62 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 100 mm, threaded, 25° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Royal Pu One |
| Kickstand | Atran center kickstand |

Frame Geometry Chart

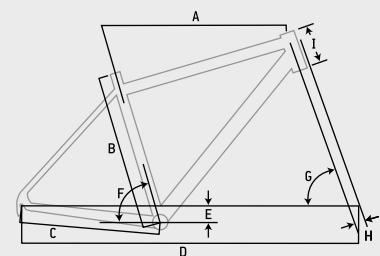

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|-------|-------|-------|-------|-------|
| A | TOP TUBE (parallel) | 560 | 580 | 600 | 620 | 640 |
| B | SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 10527 | 10727 | 10933 | 11138 | 11344 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 110 | 120 | 120 | 130 | 140 |



MOUNTAIN BIKES 26"


FREEDER 26

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 26, AL6061-T4/T6, UNI bent top tube |
| Size | 36/41/46 cm |
| Fork | ZOOM 327E, 50 mm |
| Front derailleur | Shimano FD TY700 |
| Rear derailleur | Shimano Altus, RDM310 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 42-34-24T, <=48 cm 170 mm - else 175mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-17-20-23-26-34T |
| Chain | KMC Z7 |
| Front hub | Shimano HB TX505 |
| Rear hub | Shimano FH TX505 |
| Rims | Cross X-6, 584-21*20.5 mm |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Viper |
| Kickstand | Atran center kickstand |

Frame Geometry Chart



| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 360 | 410 | 460 |
| B | SEAT TUBE | 553.1 | 553.1 | 576 |
| C | REAR CENTER | 360 | 410 | 460 |
| D | WHEEL BASE | 425 | 425 | 425 |
| E | BB DROP | 1043.6 | 1043.6 | 1061.3 |
| F | SEAT ANGLE | 38 | 38 | 38 |
| G | HEAD ANGLE | 74° | 74° | 73°30' |
| H | OFFSET | 70°30' | 70°30' | 70°30' |
| I | HEAD TUBE | 39 | 39 | 39 |
| | | 120 | 120 | 130 |


TRIAL 26

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 26, AL6061-T4/T6, UNI bent top tube |
| Size | 36/41/46 cm |
| Fork | ZOOM 327E, 50 mm |
| Front derailleur | Shimano Tourney, FDTY10 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Dotek, 42-34-24T, 170 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 559*19C |
| Tires | Kenda K1134, 46-559 (26x1.95) |
| Brakes | Saccon V-brake |
| Handlebar | ID PROJECT, riser bar, 62 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 100 mm, threaded, 25° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Royal Pu One |
| Kickstand | Atran center kickstand |

Frame Geometry Chart

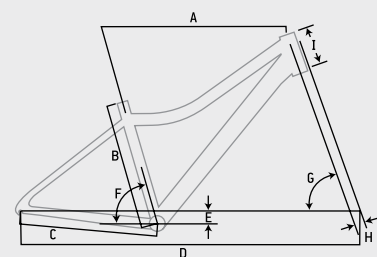

| FRAME SIZE | S | M | L |
|-----------------------|--------|--------|--------|
| A TOP TUBE (parallel) | 360 | 410 | 460 |
| B SEAT TUBE | 360 | 410 | 460 |
| C REAR CENTER | 425 | 425 | 425 |
| D WHEEL BASE | 1043.6 | 1043.6 | 1061.3 |
| E BB DROP | 38 | 38 | 38 |
| F SEAT ANGLE | 74° | 74° | 73°30' |
| G HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H OFFSET | 39 | 39 | 39 |
| I HEAD TUBE | 120 | 120 | 130 |





FULL SUSPENSION


VSR COMP 27.5

27sp



| | |
|--------------------------|--|
| Frame | Full Suspension 27.5, AL7005-T4/T6, 100 mm travel |
| Size | 44/48 cm |
| Fork | RST-Blaze-27.5-RL, 100 mm, remote lock out, adjustable preload |
| Rear shock | Kind Shok A5-RE air, 165 mm |
| Front derailleur | Shimano Altus, FDM371 |
| Rear derailleur | Shimano Acera, RDM390 |
| Shifter | Shimano Acera, SLM390 |
| Bottom bracket | Shimano BBUN26 |
| Crank set | Shimano Altus, FCM371, 44-32-22T, <=44 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano CSHG200, 11-13-15-17-20-23-26-30-34T |
| Chain | Shimano CNHG53 |
| Front hub | Shimano HBRM33 |
| Rear hub | Shimano FHRM33 |
| Rims | Cross X-6, 584*21*20.5mm |
| Tires | Kenda K1027 Kadre, 54-584 (27.5x2.20) |
| Brakes | Shimano BR-M395/BL-M396 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia Q-BIK-FLOW |

Frame Geometry Chart

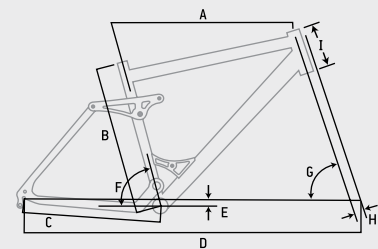

| FRAME SIZE | | M | L |
|------------|---------------------|--------|--------|
| | | 440 | 480 |
| A | TOP TUBE (parallel) | 590 | 610 |
| B | SEAT TUBE | 440 | 480 |
| C | REAR CENTER | 440 | 440 |
| D | WHEEL BASE | 1129 | 1135 |
| E | BB DROP | 5 | 5 |
| F | SEAT ANGLE | 72°30' | 72°30' |
| G | HEAD ANGLE | 69° | 69° |
| H | OFFSET | 44 | 44 |
| I | HEAD TUBE | 110 | 120 |


VSR COMP 26

27sp



| | |
|--------------------------|--|
| Frame | Full Suspension 26, AL7005-T4/T6 |
| Size | 49/53 cm |
| Fork | RST Blaze-26-RL, 100 mm, Remote Lock Out, Preload Adjust |
| Rear shock | Kind Shok A5-RE air |
| Front derailleur | Shimano Altus, FD-M371 |
| Rear derailleur | Shimano Altus, RD-M370-SGS |
| Shifter | Shimano Acera, SL-M390 |
| Bottom bracket | Shimano BB-UN26 |
| Crank set | Shimano FC-M371, 44-32-22T, <=44 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano CS-HG20, 11-13-15-17-20-23-26-30-34T (27sp) |
| Chain | Shimano CN-HG53 |
| Front hub | Shimano HB-RM66 |
| Rear hub | Shimano FH-RM66 |
| Rims | Cross X-6, 559*21*20.5mm |
| Tires | Kenda K1134, 26*2.10 |
| Brakes | Shimano BR-M395 Hydraulic Disc Brakes, 180/160 mm Rotors |
| Handlebar | ID PROJECT, Riser Bar, 66 cm, Backsweep 5°, Rise 15 mm |
| Stem | ID PROJECT, <=44 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia Q-Bik-Flow |

Frame Geometry Chart

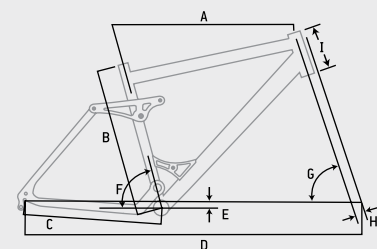

| FRAME SIZE | | L | XL |
|------------|---------------------|--------|--------|
| A | TOP TUBE (parallel) | 490 | 530 |
| B | SEAT TUBE | 490 | 530 |
| C | REAR CENTER | 430 | 430 |
| D | WHEEL BASE | 1090 | 1101 |
| E | BB DROP | 5 | 5 |
| F | SEAT ANGLE | 72.30° | 72.30° |
| G | HEAD ANGLE | 70° | 70° |
| H | OFFSET | 38 | 38 |
| I | HEAD TUBE | 120 | 120 |





TREKKING OFF ROAD


INTEGRATOR

30sp



| | |
|--------------------------|--|
| Frame | Cross 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, Butted Tubing, Tapered Head Tube |
| Size | 42/46/50/54/58 cm |
| Fork | RST Vita-28-RL, 60 mm, Magnesium Lowers, Remote Lock Out |
| Front derailleur | Shimano Deore, FD-T610 |
| Rear derailleur | Shimano Deore LX, RD-T670-SGS, Direct Mount |
| Shifter | Shimano Deore, SL-M610 |
| Bottom bracket | Shimano BB-ES-25 |
| Crank set | Shimano FC-T521, 48-36-26T, <=46 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano CS-HG62, 11-13-15-17-19-21-23-26-30-34T (10sp) |
| Chain | Shimano CN-HG54 |
| Front hub | Shimano HB-RM66 |
| Rear hub | Shimano FH-RM66 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Michelin Protek Cross Reflective 37-622 (700*35C) |
| Brakes | Shimano BR-M395 Hydraulic Disc Brakes, 160/160 mm Rotors |
| Handlebar | ID PROJECT, Riser Bar, 64 cm, Backsweep 5°, Rise 15 mm |
| Stem | ID PROJECT, <=46 cm 70 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia Sportourer Zoo-Flow |

Frame Geometry Chart



| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1094.8 | 1105.2 | 11211 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 140 | 160 |


ERGOMAX

27sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | 42/46/50/54/58 cm |
| Fork | RST Vita-TNL, 60 mm, lock out, adjustable preload |
| Front derailleur | Shimano Altus, FDM370 |
| Rear derailleur | Shimano Deore, RDM591SGS |
| Shifter | Shimano Altus, SLM370 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM371, 48-36-26T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG300, 11-12-14-16-18-21-24-28-32T |
| Chain | Shimano CNHG53 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser Bar, 64 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal Lancia |

Frame Geometry Chart

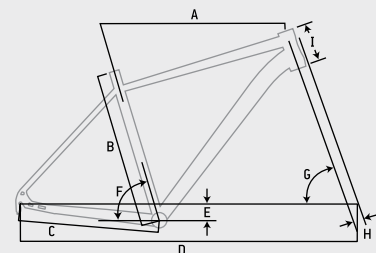

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 1121.9 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |


OPTIMUS

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | 42/46/50/54/58 cm |
| Fork | RST Nova-ML, 60 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano SLM310 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 48-38-28T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, <=46 cm 64 cm - else 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Lancia |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 11219 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |


OPTIMUS L

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | 46/50/54 cm |
| Fork | RST Nova-ML, 60 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano SLM310 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 48-38-28T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, <=46 cm 64 cm - else 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Lancia |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 590 | 600 |
| B | SEAT TUBE | 460 | 500 | 540 |
| C | REAR CENTER | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1096.6 | 1105.9 |
| E | BB DROP | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 150 |


MEGISTO

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | 42/46/50/54/58 cm |
| Fork | RST Neon-ML, 60 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM171, 48-38-28T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, <=46 cm 64 cm - else 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Lancia |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart

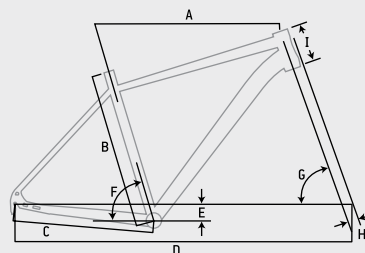

| FRAME SIZE | | S | M | L | XL | XXL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 1121.9 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |


MEGISTO L

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | 46/50/54 cm |
| Fork | RST Neon-ML, 60 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Acera, RDM360 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM171, 48-38-28T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Shimano HBTX505 |
| Rear hub | Shimano FHXX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, <=46 cm 64 cm - else 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 75 mm, else 90 mm, 7° |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Lancia |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | | M | L | XL |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 590 | 600 |
| B | SEAT TUBE | 460 | 500 | 540 |
| C | REAR CENTER | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1096.6 | 1105.9 |
| E | BB DROP | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 150 |


CROSSMO

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | M: 42/47/53/58 cm L: 40/46/53 cm |
| Fork | ZOOM 141-AMS, 45 mm, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Altus, RDM310 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCTY701, 48-38-28T, <=46/47 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Joytech |
| Rear hub | Shimano FHTX800 |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, riser bar, 63 cm, backsweep 5°, rise 30 mm, 25.4 mm |
| Stem | ID PROJECT, 90 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Freeway |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart

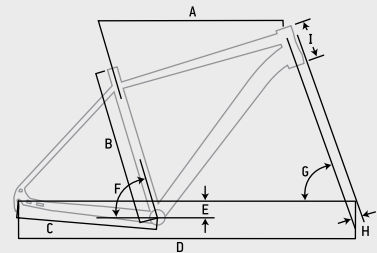

| FRAME SIZE | | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 420 | 460 | 500 | 540 | 580 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 1121.9 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |


NERGETIC

21sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6 |
| Size | M: 42/47/53/58 cm L: 40/46/53 cm |
| Fork | ZOOM 141 alloy crown & legs, 45 mm |
| Front derailleur | Shimano Tourney, FDTY710 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Prowheel, 48-38-28T, 170 mm |
| Cassette sprocket | Shimano CSHG200, 12-14-16-18-21-26-32T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Shimano FHRM30 |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Saccon V-brake |
| Handlebar | ID PROJECT, riser bar, 63 cm, backsweep 5°, rise 30 mm, 25.4 mm |
| Stem | ID PROJECT, <=46/47 cm 80 mm, else 100 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 27.2*350 mm |
| Saddle | Selle Royal Pu One |
| Kickstand | Olona center kickstand |

Frame Geometry Chart

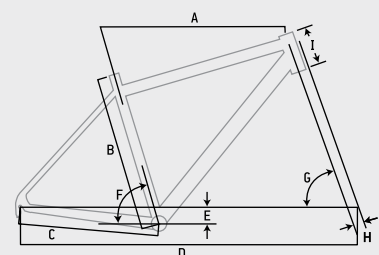

| FRAME SIZE | | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 575 | 581 | 589 | 596.5 |
| B | SEAT TUBE | 420 | 470 | 530 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1072.6 | 1078.6 | 1087.3 | 1095.5 |
| E | BB DROP | 55 | 55 | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° |
| H | OFFSET | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 140 | 160 |


MOOVIC

21sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6 |
| Size | 42/47/53/58 cm |
| Fork | ZOOM 120E, 30 mm |
| Front derailleur | Shimano Tourney, FDTY710 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Prowheel, 48-38-28T, 170 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Saccon V-brake |
| Handlebar | ID PROJECT, riser bar, 62 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 100 mm, threaded, 25° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Royal Pu One |
| Kickstand | Olona center kickstand |

Frame Geometry Chart



| FRAME SIZE | | S | M | L | XL |
|------------|------------------------|--------|--------|--------|--------|
| | | 420 | 470 | 530 | 580 |
| A | TOP TUBE (parallel) | 575 | 581 | 589 | 596.5 |
| B | SEAT TUBE | 420 | 470 | 530 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1072.6 | 1078.6 | 1089.3 | 1095.5 |
| E | BB DROP | 55 | 55 | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° |
| H | OFFSET | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 140 | 160 |


MOOVIC L

21sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6 |
| Size | 40/46/53 cm |
| Fork | ZOOM 120E, 30 mm |
| Front derailleur | Shimano Tourney, FDTY710 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Prowheel, 48-38-28T, 170 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K192 Kourier, reflective, 42-622 |
| Brakes | Saccon V-brake |
| Handlebar | ID PROJECT, riser bar, 62 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 100 mm, threaded, 25° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Royal Pu One |
| Kickstand | Olona center kickstand |

Frame Geometry Chart

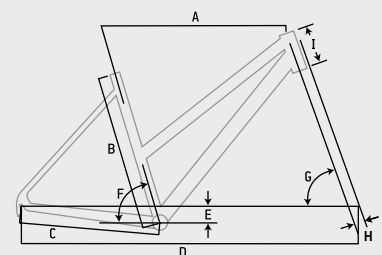

| FRAME SIZE | S | M | L | XL | |
|------------|---------------------|--------|--------|--------|--------|
| | 420 | 470 | 530 | 580 | |
| A | TOP TUBE (parallel) | 575 | 581 | 589 | 596.5 |
| B | SEAT TUBE | 420 | 470 | 530 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1072.6 | 1078.6 | 1089.3 | 1095.5 |
| E | BB DROP | 55 | 55 | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° |
| H | OFFSET | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 140 | 160 |





SPORT TOURING


MULTIGO

30sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | M: 42/46/50/54/58 cm L: 46/50/54 cm W: 46/50/54 cm |
| Fork | RST Vita-RL, 60 mm, remote lock out, adjustable preload |
| Front derailleur | Shimano Deore, FDT610 |
| Rear derailleur | Shimano Deore XT, RDT780-SGS |
| Shifter | Shimano Deore, SLT610 |
| Bottom bracket | Shimano Deore, FC-T611 |
| Crank set | Shimano Deore, FC-T611, 48-36-26T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG50, 11-13-15-17-19-21-24-28-32-34T |
| Chain | Shimano CNHG54 |
| Front hub | Shimano DH3D37 hub dynamo |
| Rear hub | Shimano FHM3050 |
| Rims | Cross X-6, 622-21*20.5 mm |
| Tires | Kenda K935 Khan 42-622/700*40C reflective |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 180/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 85 mm, else 100 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal Lookin |
| Lightning set | AXA Echo, 30 Lux/AXA Go Steady LED |
| Mudguards | SKS |
| Carrier | Aluminium |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | S | M | L | XL |
|------------|-------|-------|-------|-------|
| A | 420 | 470 | 530 | 580 |
| B | 575 | 581 | 589 | 596.5 |
| C | 420 | 470 | 530 | 580 |
| D | 450 | 450 | 450 | 450 |
| E | 10726 | 10786 | 10893 | 10955 |
| F | 55 | 55 | 55 | 55 |
| G | 73° | 73° | 73° | 73° |
| H | 71° | 71° | 71° | 71° |
| I | 45 | 45 | 45 | 45 |
| I | 120 | 130 | 140 | 160 |




TRAVELON

27sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand bracket |
| Size | M: 42/46/50/54/58 cm L: 46/50/54 cm W: 46/50/54 cm |
| Fork | RST Nova-ML, 60 mm, mechanical lock out, adjustable preload |
| Front derailleur | Shimano Altus, FDM370 |
| Rear derailleur | Shimano Acera, RDM3000SGS |
| Shifter | Shimano Altus, SLM370 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM371, 48-36-26T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG300, 11-12-14-16-18-21-24-28-32T |
| Chain | Shimano CNHG53 |
| Front hub | Shimano DH3D37 hub dynamo |
| Rear hub | Shimano HTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K935 Khan 42-622/700*40C reflective |
| Brakes | Shimano BR-M355/BL-M355 disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 5°, rise 15 mm, 31.8 mm |
| Stem | ID PROJECT, <=46 cm 85 mm, else 100 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Freeway |
| Lightning set | AXA Echo, 15 Lux/AXA Go Steady LED |
| Mudguards | SKS |
| Carrier | Aluminium |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 1121.9 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |




EZIGO

24sp



| | |
|--------------------------|--|
| Frame | Cross/Trekking 28, AL6061-T4/T6, Formed Tubes, Internal Gear Cables, 18/40 mm kickstand brackets |
| Size | M: 42/46/50/54/58 cm L: 46/50/54 cm W: 46/50/54 cm |
| Fork | ZOOM 141D, 45 mm, adjustable preload |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano Altus, RDM310 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM171, 48-38-28T, <=46 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z8/HG50 |
| Front hub | Shimano DH3D37 hub dynamo |
| Rear hub | Shimano FHTX505 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K935 Khan 42-622/700*40C reflective |
| Brakes | Shimano BRTX805 mechanical disc brake, 160/160 mm |
| Handlebar | ID PROJECT, riser bar, <=46 cm 63 cm - else 66 cm, backsweep 5°, rise 30 mm, 25.4 mm |
| Stem | ID PROJECT, <=46 cm 90 mm, else 110 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 31.6*350 mm |
| Saddle | Selle Royal RVS Freeway |
| Lighting set | AXA Echo, 15 Lux/AXA Slim Steady LED |
| Mudguards | SKS |
| Carrier | Aluminium |
| Kickstand | Atran Stylo-HV rear kickstand |

Frame Geometry Chart



| FRAME SIZE | | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 580 | 580 | 590 | 600 | 615 |
| B | SEAT TUBE | 420 | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1084.5 | 1096.6 | 1105.9 | 1121.9 |
| E | BB DROP | 50 | 50 | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 120 | 130 | 150 | 170 |




COMFORT

24sp



| | |
|--------------------------|---|
| Frame | Cross/Trekking 28, AL6061-T4/T6 |
| Size | 40/46 cm |
| Fork | ZOOM 120E, 30 mm |
| Front derailleur | Shimano FDTY710 |
| Rear derailleur | Shimano RDTY300 |
| Shifter | Shimano STEF51 |
| Bottom bracket | Shimano BBUN100 |
| Crank set | Shimano FCM171, 48-38-28T, <=46/47 cm 170 mm - else 175 mm |
| Cassette sprocket | Shimano CSHG31, 11-13-15-18-21-24-28-32T |
| Chain | KMC Z7 |
| Front hub | Shimano DH3N31 hub dynamo |
| Rear hub | Shimano FHTX800 |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K935 Khan, reflective, 42-622 |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, riser bar, <=46/47 cm 63 cm - else 66 cm, backsweep 5°, rise 30 mm, 25.4 mm |
| Stem | ID PROJECT, 90 mm, threaded, adjustable |
| Seat post | ID PROJECT, 24 mm offset, 27.2*350 mm |
| Saddle | Selle Royal RVS Freeway |
| Lightning set | AXA Echo, 15 Lux/AXA Slim Steady LED |
| Mudguards | SKS |
| Carrier | Steel |
| Kickstand | Atran center kickstand |

Frame Geometry Chart

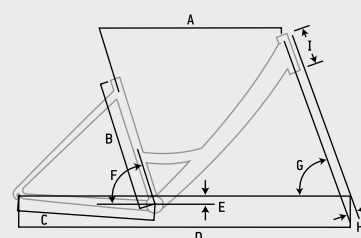

| FRAME SIZE | | S | M |
|------------|---------------------|------|--------|
| | | 400 | 460 |
| A | TOP TUBE (parallel) | 580 | 590 |
| B | SEAT TUBE | 400 | 460 |
| C | REAR CENTER | 460 | 460 |
| D | WHEEL BASE | 1114 | 1124.5 |
| E | BB DROP | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° |
| G | HEAD ANGLE | 69° | 69° |
| H | OFFSET | 45 | 45 |
| I | HEAD TUBE | 175 | 175 |



URBAN CITY


FUNCORE

27sp



| | |
|--------------------------|---|
| Frame | Urban-Fitness, AL6061-T4/T6 |
| Size | 44/48/53 cm |
| Fork | Urban-Fitness, Rigid, Alloy Blades, CrMo Steerer |
| Front derailleur | Shimano Altus, FD-M370 |
| Rear derailleur | Shimano Altus, RD-M370-SGS |
| Shifter | Shimano Altus, SL-M370 |
| Bottom bracket | Shimano BB-UN26 |
| Crank set | Shimano FC-M371, 48-36-26T, <=48 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano CS-HG20, 11-13-15-17-19-21-24-28-32T (9sp) |
| Chain | Shimano CN-HG53 |
| Front hub | Shimano HB-RM66 |
| Rear hub | Shimano FH-RM66 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K1067 Kwick-Tendril, Reflective, 700*32C |
| Brakes | Shimano BR-M395 Hydraulic Disc Brakes, 160/160 mm Rotors |
| Handlebar | ID PROJECT, Flat Bar, 62 cm, Backsweep 5° |
| Stem | ID PROJECT, <=480 mm 90 mm, else 110 mm, 7° |
| Seat post | ID PROJECT, 27.2*350 mm |
| Saddle | Selle Italia Sportourer Zoo |

Frame Geometry Chart




| FRAME SIZE | S | M | L | |
|------------|---------------------|--------|--------|--------|
| | | 440 | 480 | 530 |
| A | TOP TUBE (parallel) | 570 | 580 | 600 |
| B | SEAT TUBE | 440 | 485 | 530 |
| C | REAR CENTER | 445 | 445 | 445 |
| D | WHEEL BASE | 1062.8 | 1071.2 | 1081.5 |
| E | BB DROP | 70 | 70 | 70 |
| F | SEAT ANGLE | 73°15' | 73°35' | 73° |
| G | HEAD ANGLE | 71° | 71°30' | 72° |
| H | OFFSET | 51 | 51 | 51 |
| I | HEAD TUBE | 150 | 165 | 190 |

CITYRUN
24sp

| | |
|--------------------------|--|
| Frame | Urban-Fitness, AL6061-T4/T6 |
| Size | 44/48/53 cm |
| Fork | Urban-Fitness, Rigid, Alloy Blades, CrMo Steerer |
| Front derailleur | Shimano FD-M191 |
| Rear derailleur | Shimano Altus, RD-M280-SGS |
| Shifter | Shimano ST-EF51 |
| Bottom bracket | Shimano BB-UN26 |
| Crank set | Shimano FC-M171, 48-38-28T, <=48 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano CS-HG31, 11-13-15-18-21-24-28-32T (8sp) |
| Chain | KMC Z8/HG50 |
| Front hub | Joytech Alloy QR |
| Rear hub | Shimano FH-RM70 |
| Rims | Cross X-6, 622*21*20.5mm |
| Tires | Kenda K193 Kwest, 700*28C |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, Flat Bar, 62 cm, Backsweep 5° |
| Stem | ID PROJECT, <=480 mm 90 mm, else 110 mm, 7° |
| Seat post | ID PROJECT, 27.2*350 mm |
| Saddle | Selle Italia Sportourer Zoo |

Frame Geometry Chart



| FRAME SIZE | S | M | L | |
|------------|---------------------|--------|--------|--------|
| | 440 | 480 | 530 | |
| A | TOP TUBE (parallel) | 570 | 580 | 600 |
| B | SEAT TUBE | 440 | 485 | 530 |
| C | REAR CENTER | 445 | 445 | 445 |
| D | WHEEL BASE | 1058.7 | 1066.9 | 1075.2 |
| E | BB DROP | 70 | 70 | 70 |
| F | SEAT ANGLE | 73°15' | 73°35' | 73° |
| G | HEAD ANGLE | 71° | 71°30' | 72° |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 150 | 165 | 190 |


CITYLIFE 7

7sp



| | |
|--------------------------|---|
| Frame | City loop, AL6061-T4/T6 |
| Size | 40/46/51 cm |
| Fork | Rigid, HiTen |
| Rear derailleur | Shimano RDTY300 |
| Shifter | Shimano Tourney revo shifter, SLRS36 |
| Bottom bracket | Thun Sealed cartridge |
| Crank set | Prowheel, 38T, 170 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z50 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 622*19C |
| Tires | Kenda K193 Kwest, reflective, 40-622 |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, city bar, 60 cm, backsweep 40°, rise 55 mm, 25.4 mm |
| Stem | ID PROJECT, 80 mm, threaded |
| Seat post | ID PROJECT, alloy tube, 28.6*350 mm |
| Saddle | Selle Royal RVS Moody |
| Lightning set | AXA Ellipsoid, 10 Lux/AXA Slim Steady LED |
| Mudguards | SKS |
| Carrier | Steel |
| Kickstand | Atran center kickstand |

Frame Geometry Chart

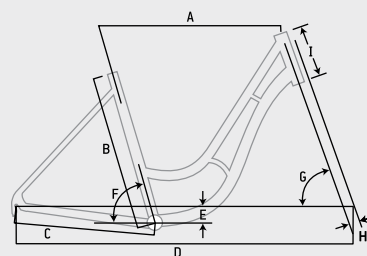


| FRAME SIZE | S | M | L |
|---------------------|--------|--------|--------|
| A | 400 | 460 | 510 |
| TOP TUBE (parallel) | 602 | 607 | 612 |
| B | 400 | 460 | 510 |
| SEAT TUBE | 460 | 460 | 460 |
| C | 460 | 460 | 460 |
| REAR CENTER | 1108.2 | 1113.2 | 1118.2 |
| D | 1108.2 | 1113.2 | 1118.2 |
| WHEEL BASE | 72 | 72 | 72 |
| E | 72 | 72 | 72 |
| BB DROP | 72°30' | 72°30' | 72°30' |
| F | 72°30' | 72°30' | 72°30' |
| SEAT ANGLE | 70° | 70° | 70° |
| G | 70° | 70° | 70° |
| HEAD ANGLE | 45 | 45 | 45 |
| H | 45 | 45 | 45 |
| OFFSET | 170 | 170 | 170 |
| I | 170 | 170 | 170 |
| HEAD TUBE | | | |

CITYCOM
7sp

| | |
|--------------------------|--|
| Frame | City 28, AL6061-T4/T6 |
| Size | L: 40/46 cm M: 46/53 cm |
| Fork | City HiTen |
| Rear derailleur | Shimano RD-TX35 |
| Shifter | Shimano Revo Shifter, SL-RS36 |
| Bottom bracket | Thun Sealed Cartridge |
| Crank set | Prowheel PRA-111, 38T, 170 mm Alloy Crank |
| Cassette sprocket | Shimano MF-TZ21, 14-16-18-20-22-24-28T (7sp) |
| Chain | KMC Z50 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Exal TX19, 622-19*21 mm |
| Tires | Kenda K193 Kwest, 700*38C (40-622) |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, City Bar, 60 cm, Backsweep 40°, Rise 55 mm |
| Stem | ID PROJECT, 80 mm, 30° |
| Seat post | ID PROJECT, Alloy, 28.6*300 mm |
| Saddle | Selle Royal Moody |
| Lightning set | AXA Ellipsoid, 10 Lux/AXA Slim Steady LED |
| Mudguards | SKS |
| Kickstand | Middle Type |

Frame Geometry Chart

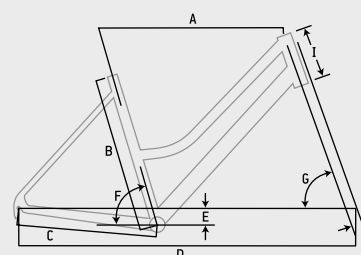

| | FRAME SIZE | S | L |
|---|---------------------|--------|--------|
| | | 460 | 530 |
| A | TOP TUBE (parallel) | 607 | 612 |
| B | SEAT TUBE | 460 | 530 |
| C | REAR CENTER | 460 | 460 |
| D | WHEEL BASE | 1113.2 | 1118.2 |
| E | BB DROP | 72 | 72 |
| F | SEAT ANGLE | 72°30' | 72°30' |
| G | HEAD ANGLE | 70° | 70° |
| H | OFFSET | 45 | 45 |
| I | HEAD TUBE | 170 | 170 |





PEDELECS


ORAMA 323-DC8

8sp



| | |
|--------------------------|---|
| Frame | Pedelec 28, AL6061-T4/T6, STePS, 40 mm kickstand bracket |
| Size | M: 46/50/54/58 cm L: 46/50/54 cm W: 42/47/52 cm |
| Fork | RST Vita-TNL, 60 mm, lock out, adjustable preload |
| Frame lock | Axa Solid Plus |
| Shifter | Shimano STePS switch, SWE6000, big display |
| Drive unit | Shimano STePS drive unit, DUE6010 |
| Crank set | Shimano STePS, FCE6000, 38T, <=46 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano, 19T |
| Chain | Shimano CNHG71 |
| Front hub | Shimano Acera, HBM3000 |
| Rear hub | Shimano NEXUS 8Di2, SGC6060 |
| Rims | Mach-1 260, 622*21C |
| Tires | Schwalbe Energizer Plus GreenGuard, reflective, 47-622 |
| Brakes | Magura HS22 rim brake, 4-finger, quick release, coaster brake |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 18° |
| Stem | ID PROJECT, 105 mm, adjustable |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Royal Lookin |
| Lightning set | AXA Pico, 30 Lux/AXA Slim Steady LED |
| Mudguards | SKS for Shimano STePS, CAB |
| Carrier | Aluminium for Shimano STePS |
| Kickstand | Atran REX-HV rear kickstand |

Frame Geometry Chart

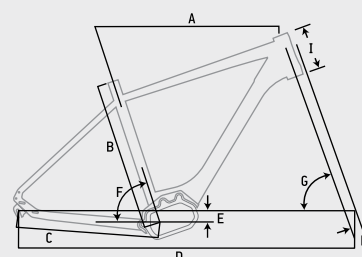

| FRAME SIZE | | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 460 | 500 | 540 | 580 |
| B | SEAT TUBE | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 475 | 475 | 475 | 475 |
| D | WHEEL BASE | 1086.9 | 1097.3 | 1113 | 1128.5 |
| E | BB DROP | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 145 | 155 | 170 | 180 |




ORAMA 353-D8

8sp



| | |
|--------------------------|--|
| Frame | Pedelec 28, AL6061-T4/T6, STePS, 40 mm kickstand bracket |
| Size | M: 46/50/54/58 cm L: 46/50/54 cm W: 42/47/52 cm |
| Fork | RST Vita-TNL, 60 mm, lock out, adjustable preload |
| Frame lock | Axa Solid Plus |
| Shifter | Shimano STePS switch, SWE6000, big display |
| Drive unit | Shimano STePS drive unit, DUE6001 |
| Crank set | Shimano STePS, FCE6000, 38T, <=46 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano, 19T |
| Chain | Shimano CNHG71 |
| Front hub | Shimano Acera, HBM3050 |
| Rear hub | Shimano Alfine 8Di2, SGS505 |
| Rims | Mach-1 640 Disc, 622*21C |
| Tires | Schwalbe Energizer Plus GreenGuard, reflective, 47-622 |
| Brakes | Shimano BR-M446/BL-T445 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 18° |
| Stem | ID PROJECT, 105 mm, adjustable |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Royal Lookin |
| Lightning set | AXA Pico, 30 Lux/AXA Slim Steady LED |
| Mudguards | SKS for Shimano STePS, CAB |
| Carrier | Aluminium for Shimano STePS |
| Kickstand | Atran REX-HV rear kickstand |

Frame Geometry Chart

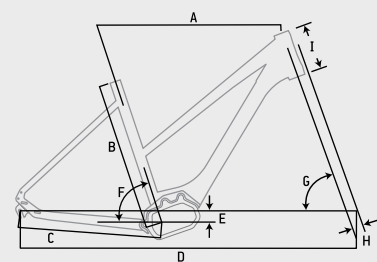

| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 460 | 500 | 540 |
| B | SEAT TUBE | 460 | 500 | 540 |
| C | REAR CENTER | 475 | 475 | 475 |
| D | WHEEL BASE | 1088 | 1098.5 | 1113.9 |
| E | BB DROP | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 44 | 44 | 44 |
| I | HEAD TUBE | 170 | 180 | 190 |




ORAMA 323-C7

7sp



| | |
|--------------------------|---|
| Frame | Pedelec 28, AL6061-T4/T6, STePS, 40 mm kickstand bracket |
| Size | 42/47/52 cm |
| Fork | RST Vita-TNL, 60 mm, lock out, adjustable preload |
| Frame lock | Axa Solid Plus |
| Shifter | Shimano Nexus Revo Shifter/STePS switch, SWE6000, big display |
| Drive unit | Shimano STePS drive unit, DUE6010 |
| Crank set | Shimano STePS, FCE6000, 38T, <=46 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano, 19T |
| Chain | Shimano CNHG71 |
| Front hub | Shimano Acera, HBM3000 |
| Rear hub | Shimano NEXUS 7, SGC3000 |
| Rims | Mach-1 260, 622*21C |
| Tires | Schwalbe Energizer Plus GreenGuard, reflective, 47-622 |
| Brakes | Magura HS22 rim brake, 4-finger, quick release, coaster brake |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 18° |
| Stem | ID PROJECT, 105 mm, adjustable |
| Seat post | ID PROJECT, straight 31.6*350 mm |
| Saddle | Selle Royal Lookin |
| Lightning set | AXA Pico, 30 Lux/AXA Slim Steady LED |
| Mudguards | SKS for Shimano STePS, CAB |
| Carrier | Aluminium for Shimano STePS |
| Kickstand | Atran REX-HV rear kickstand |

Frame Geometry Chart

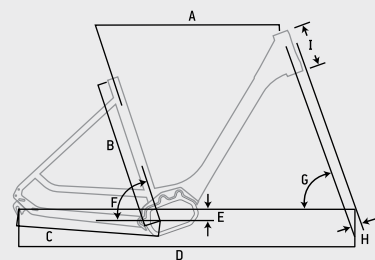

| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 420 | 470 | 520 |
| B | SEAT TUBE | 570 | 580 | 590 |
| C | REAR CENTER | 420 | 470 | 520 |
| D | WHEEL BASE | 475 | 475 | 475 |
| E | BB DROP | 1099.1 | 1109.1 | 1119.1 |
| F | SEAT ANGLE | 60 | 60 | 60 |
| G | HEAD ANGLE | 73° | 73° | 73° |
| H | OFFSET | 70°30' | 70°30' | 70°30' |
| I | HEAD TUBE | 45 | 45 | 45 |
| | | 160 | 170 | 180 |




ORAMA 420-E9

9sp



| | |
|--------------------------|---|
| Frame | Pedelec 28, AL6061-T4/T6, STePS, 40 mm kickstand bracket |
| Size | M: 46/50/54/58 cm L: 46/50/54 cm W: 42/47/52 cm |
| Fork | RST Vita-TNL, 60 mm, lock out, adjustable preload |
| Frame lock | Axa Solid Plus |
| Rear derailleur | Shimano Deore, RDM591SGS |
| Shifter | Shimano Acera, SLM3000/STePS switch, SWE6000, big display |
| Drive unit | Shimano STePS drive unit, DUE6001 |
| Crank set | Shimano STePS, FC-E6000, 38T, <=47 cm 170 mm, else 175 mm |
| Cassette sprocket | Shimano CSHG300, 11-13-15-17-20-23-26-30-34T |
| Chain | Shimano CNE6070 |
| Front hub | Shimano Acera, HBM3050 |
| Rear hub | Shimano Acera, FHM3050 |
| Rims | Mach-1 640 Disc, 622*21C |
| Tires | Schwalbe Energizer Plus GreenGuard, reflective, 47-622 |
| Brakes | Shimano BR-M355/BR-M355 disc brake, 180/180 mm |
| Handlebar | ID PROJECT, riser bar, 66 cm, backsweep 18° |
| Stem | ID PROJECT, 105 mm, adjustable |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Royal Lookin |
| Lightning set | AXA Pico, 30 Lux/AXA Slim Steady LED |
| Mudguards | SKS for Shimano STePS, CAB |
| Carrier | Aluminium for Shimano STePS |
| Kickstand | Atran REX-HV rear kickstand |

Frame Geometry Chart

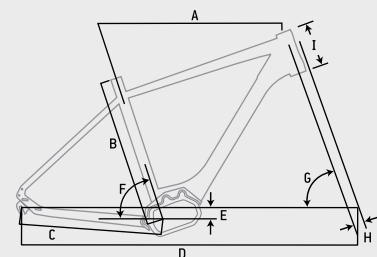

| FRAME SIZE | | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 460 | 500 | 540 | 580 |
| B | SEAT TUBE | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 475 | 475 | 475 | 475 |
| D | WHEEL BASE | 1086.9 | 1097.3 | 1113 | 1128.5 |
| E | BB DROP | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 145 | 155 | 170 | 180 |





ROAD


STAGE TEAM Di2

ULTEGRA 22sp



| | |
|--------------------------|---|
| Frame | Road, UD-carbon, tapered head tube, press fit BB |
| Size | 45/48/51/54/57 cm |
| Fork | Road, straight carbon blades, tapered carbon steerer |
| Front derailleur | Shimano Ultegra Di2, FD6870 |
| Rear derailleur | Shimano Ultegra Di2, RD6870 |
| Shifter | Shimano Ultegra Di2, ST6870 |
| Bottom bracket | Shimano SMBB72 |
| Crank set | Shimano Ultegra, FC6800, 52-36T, <=51 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano Ultegra, CS6800, 11-12-13-14-15-17-19-21-23-25-28T |
| Chain | Shimano CNHG701 |
| Hubs | Shimano wheelset WHRS81C35 |
| Rims | Shimano wheelset WHRS81C35 |
| Tires | Kenda K1081 Kadence Premium, 700x23C |
| Brakes | Shimano Ultegra caliper brake, BR6800 |
| Handlebar | ID PROJECT, road bar, <=48 cm 420 mm else 440 mm, 125 mm drop, 70 mm reach |
| Stem | ID PROJECT, <=48 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia X1 |

Frame Geometry Chart



| FRAME SIZE | | XXS | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 450 | 480 | 510 | 540 | 570 | 600 |
| B | SEAT TUBE | 450 | 480 | 510 | 540 | 570 | 600 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 986.9 | 992.2 | 999.3 | 1005.2 | 1016.1 | 1014.1 |
| E | BB DROP | 72.5 | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F | SEAT ANGLE | 75° | 74°30' | 73°30' | 73°30' | 73° | 73° |
| G | HEAD ANGLE | 72°30' | 72°30' | 72°30' | 73° | 73° | 73° |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 95 | 95 | 120 | 155 | 180 | 210 |


STAGE TEAM

ULTEGRA 22sp



| | |
|--------------------------|--|
| Frame | Road, UD-carbon, tapered head tube, press fit BB |
| Size | 45/48/51/54/57 cm |
| Fork | Road, straight carbon blades, tapered carbon steerer |
| Front derailleur | Shimano Ultegra, FD6800 |
| Rear derailleur | Shimano Ultegra, RD6800 |
| Shifter | Shimano Ultegra, ST6800 |
| Bottom bracket | Shimano SMBB72 |
| Crank set | Shimano Ultegra, FC6800, 52-36T, <=51 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano Ultegra, CS6800, 11-12-13-14-15-17-19-21-23-25-28T |
| Chain | Shimano CNHG701 |
| Hubs | Shimano Ultegra wheelset, WH6800 |
| Rims | Shimano Ultegra wheelset, WH6800 |
| Tires | Kenda K1081 Kadence Premium, 700x23C |
| Brakes | Shimano Ultegra caliper brake, BR6800 |
| Handlebar | ID PROJECT, road bar, <=48 cm 420 mm else 440 mm, 125 mm drop, 70 mm reach |
| Stem | ID PROJECT, <=48 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia X1 |

Frame Geometry Chart

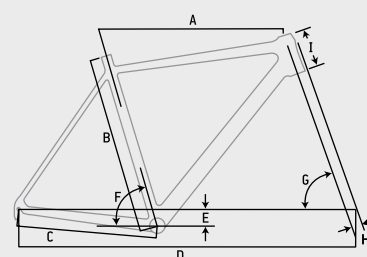

| FRAME SIZE | | XXS | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 450 | 480 | 510 | 540 | 570 | 600 |
| B | SEAT TUBE | 450 | 480 | 510 | 540 | 570 | 600 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 986.9 | 992.2 | 999.3 | 1005.2 | 1016.1 | 1014.1 |
| E | BB DROP | 72.5 | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F | SEAT ANGLE | 75° | 74°30' | 73°30' | 73°30' | 73° | 73° |
| G | HEAD ANGLE | 72°30' | 72°30' | 72°30' | 73° | 73° | 73° |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 95 | 95 | 120 | 155 | 180 | 210 |


STAGE TEAM

105 22sp



| | |
|--------------------------|---|
| Frame | Road, UD-carbon, tapered head tube, press fit BB |
| Size | 45/48/51/54/57 cm |
| Fork | Road, straight carbon blades, tapered carbon steerer |
| Front derailleur | Shimano 105, FD5800 |
| Rear derailleur | Shimano 105, RD5800 |
| Shifter | Shimano 105, ST5800 |
| Bottom bracket | Shimano SMBB72 |
| Crank set | Shimano 105, FC5800, 52-36T, <=51 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano 105, CS5800, 11-12-13-14-15-17-19-21-23-25-28T |
| Chain | Shimano CNHG600 |
| Hubs | Shimano WHRS010 |
| Rims | Shimano WHRS010 |
| Tires | Kenda K1081 Kadence Premium, 700x23C |
| Brakes | Shimano 105 caliper brake, BR5800 |
| Handlebar | ID PROJECT, road bar, <=48 cm 420 mm else 440 mm, 125 mm drop, 70 mm reach |
| Stem | ID PROJECT, <=48 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, straight, 31.6*350 mm |
| Saddle | Selle Italia X1 |

Frame Geometry Chart

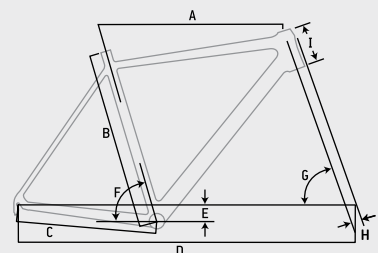

| FRAME SIZE | | XXS | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 450 | 480 | 510 | 540 | 570 | 600 |
| B | SEAT TUBE | 450 | 480 | 510 | 540 | 570 | 600 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 986.9 | 992.2 | 999.3 | 1005.2 | 1016.1 | 1014.1 |
| E | BB DROP | 72.5 | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F | SEAT ANGLE | 75° | 74°30' | 73°30' | 73°30' | 73° | 73° |
| G | HEAD ANGLE | 72°30' | 72°30' | 72°30' | 73° | 73° | 73° |
| H | OFFSET | 45 | 45 | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 95 | 95 | 120 | 155 | 180 | 210 |


STAGE COMP

105 22sp



| | |
|--------------------------|---|
| Frame | Carbon Monocoque, Tapered Head Tube, Press Fit BB |
| Size | 48/51/54/57 cm |
| Fork | Carbon Monocoque, Tapered Steerer |
| Front derailleur | Shimano 105, FD-5800 |
| Rear derailleur | Shimano 105, RD-5800 |
| Shifter | Shimano 105, STI-5800 |
| Bottom bracket | Shimano Press Fit BB-7241 |
| Crank set | Shimano 105 FC-5800, 52-36T*170 else 175mm |
| Cassette sprocket | Shimano 105, CS-5800, 11-12-13-14-15-17-19-21-23-2528T |
| Chain | Shimano CNHG600 |
| Hubs | Shimano Wheelset RS501 |
| Rims | Shimano wheelset RS501 10sp |
| Tires | Kenda Kadence 700*23C, Skinwall 60tpi |
| Brakes | Shimano 105, Calipers BR5800 |
| Handlebar | Kalloy Anatomic Oversize Drop Bar |
| Stem | Kalloy 3D Forged, 31.8 cm* 90 mm else 100 mm |
| Seat post | Kalloy, 31.6*350mm |
| Saddle | Selle Italia Nekar-Flow |

Frame Geometry Chart

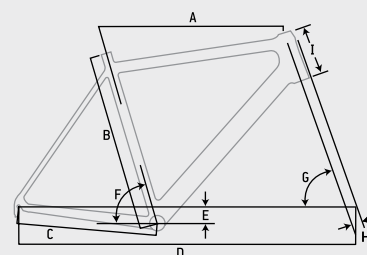

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|--------|--------|--------|--------|
| A | 480 | 510 | 540 | 570 | 600 |
| B | 400 | 440 | 480 | 520 | 560 |
| C | 410 | 410 | 415 | 415 | 415 |
| D | 980.7 | 984.6 | 1000.3 | 1011.4 | 1031.8 |
| E | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F | 74°30' | 74° | 73°30' | 73° | 73° |
| G | 71°30' | 72°30' | 72°30' | 72°30' | 72°30' |
| H | 50 | 50 | 50 | 50 | 50 |
| 1 | 105 | 135 | 170 | 205 | 235 |


STAGE COMP

105 20sp



| | |
|--------------------------|---|
| Frame | Carbon Monocoque, Tapered Head Tube, Press Fit BB |
| Size | 48/51/54/57 cm |
| Fork | Carbon Monocoque, Tapered Steerer |
| Front derailleur | Shimano 105, FD-5700 |
| Rear derailleur | Shimano 105, RD-5701 Short Cage |
| Shifter | Shimano 105, STI-5700 2*10sp |
| Bottom bracket | Shimano Press Fit BB-7241 |
| Crank set | Shimano 105 Compact FC-5750, 50-34T*170/175mm Hollowtech-2 |
| Cassette sprocket | Shimano 105, CS-5700, 11-12-13-14-15-17-19-21-23-25T (10sp) |
| Chain | Shimano 105, CN-5701 10sp |
| Front hub | Shimano Wheelset RS501 |
| Rear hub | Shimano wheelset RS501 10sp |
| Rims | Shimano wheelset RS501 High Profile |
| Tires | Kenda Kadence 700*23C, Skinwall 60tpi |
| Brakes | Shimano 105, BR-5700 Calipers |
| Handlebar | Kalloy Anatomic Oversize Drop Bar |
| Stem | Kalloy 3D Forged, 31.8 cm* 90 mm else 100 mm |
| Seat post | Kalloy, 31.6*350mm |
| Saddle | Selle Italia Nekkar-Flow |

Frame Geometry Chart

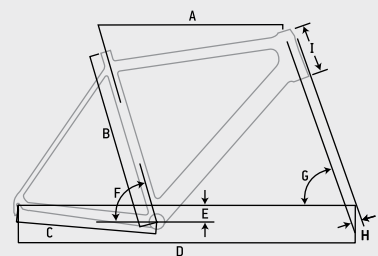

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|--------|--------|--------|--------|
| A | 480 | 510 | 540 | 570 | 600 |
| B | 520 | 535 | 550 | 565 | 585 |
| C | 400 | 440 | 480 | 520 | 560 |
| D | 410 | 410 | 415 | 415 | 415 |
| E | 980.7 | 984.6 | 1000.3 | 1011.4 | 1031.8 |
| F | 72.5 | 70 | 70 | 67.5 | 67.5 |
| G | 74°30' | 74° | 73°30' | 73° | 73° |
| H | 71°30' | 72°30' | 72°30' | 72°30' | 72°30' |
| I | 50 | 50 | 50 | 50 | 50 |
| I | 105 | 135 | 170 | 205 | 235 |


STAGE COMP

Tiagra 20sp



| | |
|--------------------------|---|
| Frame | Carbon Monocoque, Tapered Head Tube, Press Fit BB |
| Size | 48/51/54/57 cm |
| Fork | Carbon Monocoque, Tapered Steerer |
| Front derailleur | Shimano 105, FD-5700 |
| Rear derailleur | Shimano 105, RD-5701 Short Cage |
| Shifter | Shimano 105, STI-5700 2*10sp |
| Bottom bracket | Shimano Press Fit BB-7241 |
| Crank set | Shimano 105 Compact FC-5750, 50-34T*170/175mm Hollowtech-2 |
| Cassette sprocket | Shimano 105, CS-5700, 11-12-13-14-15-17-19-21-23-25T (10sp) |
| Chain | Shimano 105, CN-5701 10sp |
| Front hub | Shimano Wheelset RS501 |
| Rear hub | Shimano wheelset RS501 10sp |
| Rims | Shimano wheelset RS501 High Profile |
| Tires | Kenda Kadence 700*23C, Skinwall 60tpi |
| Brakes | Shimano 105, BR-5700 Calipers |
| Handlebar | Kalloy Anatomic Oversize Drop Bar |
| Stem | Kalloy 3D Forged, 31.8 cm* 90 mm else 100 mm |
| Seat post | Kalloy, 31.6*350mm |
| Saddle | Selle Italia Neekar-Flow |

Frame Geometry Chart

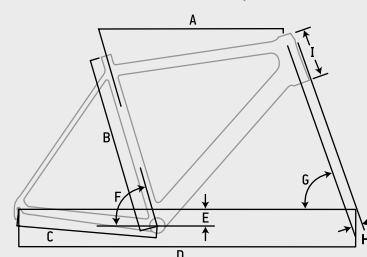

| FRAME SIZE | XS | S | M | L | XL |
|-----------------------|--------|--------|--------|--------|--------|
| A | 480 | 510 | 540 | 570 | 600 |
| A TOP TUBE (parallel) | 520 | 535 | 550 | 565 | 585 |
| B SEAT TUBE | 400 | 440 | 480 | 520 | 560 |
| C REAR CENTER | 410 | 410 | 415 | 415 | 415 |
| D WHEEL BASE | 980.7 | 984.6 | 1000.3 | 1011.4 | 1031.8 |
| E BB DROP | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F SEAT ANGLE | 74°30' | 74° | 73°30' | 73° | 73° |
| G HEAD ANGLE | 71°30' | 72°30' | 72°30' | 72°30' | 72°30' |
| H OFFSET | 50 | 50 | 50 | 50 | 50 |
| I HEAD TUBE | 105 | 135 | 170 | 205 | 235 |


STAGE

105 22sp



| | |
|--------------------------|---|
| Frame | Road Compact, AL6061-T4/T6, Tapered Head Tube |
| Size | 45/48/51/54/57/60 cm |
| Fork | Carbon, Alloy Tapered Steerer |
| Front derailleur | Shimano 105, FD-5800 |
| Rear derailleur | Shimano 105, RD-5800 |
| Shifter | Shimano 105, ST-5800 |
| Bottom bracket | Shimano 105, FC-RS500 |
| Crank set | Shimano 105, FC-RS500, 50-34T, <=51 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano 105, CS-5800, 11-12-13-14-15-17-19-21-23-25-28T (11sp) |
| Chain | Shimano 105, CN-HG600 |
| Front hub | Shimano, HB-5800 |
| Rear hub | Shimano, FH-5800 |
| Rims | EXAL XR3, 622-13*24 mm |
| Tires | Kenda K1081 Kadence Premium, 60tpi, 700*23C |
| Brakes | Shimano 105, BR-5800 |
| Handlebar | ID PROJECT Road, 131 mm Drop, 84 mm Reach, <=51 cm 420 mm else 440 mm |
| Stem | ID PROJECT, <=51 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia Nekar-Flow |

Frame Geometry Chart

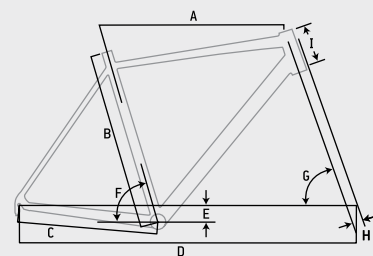

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|--------|--------|--------|--------|
| A | 480 | 510 | 540 | 570 | 600 |
| B | 480 | 510 | 540 | 570 | 600 |
| C | 410 | 410 | 415 | 415 | 415 |
| D | 980.7 | 984.6 | 1000.3 | 1011.4 | 1031.8 |
| E | 72.5 | 70 | 70 | 67.5 | 67.5 |
| F | 74°30' | 74° | 73°30' | 73° | 73° |
| G | 71°30' | 72°30' | 72°30' | 72°30' | 72°30' |
| H | 50 | 50 | 50 | 50 | 50 |
| I | 105 | 135 | 170 | 205 | 235 |


STAGE

Tiagra 20sp



| | |
|--------------------------|--|
| Frame | Road Compact, AL6061-T4/T6, Tapered Head Tube |
| Size | 40/45/50/55/60 cm |
| Fork | Carbon, Alloy Tapered Steerer |
| Front derailleur | Shimano Tiagra, FD-4603 |
| Rear derailleur | Shimano Tiagra, RD-4601 |
| Shifter | Shimano Tiagra, ST-4600 |
| Bottom bracket | Shimano FC-4650 |
| Crank set | Shimano FC-4650, 50-34T, <=51 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano Tiagra, CS-4600, 12-13-14-15-17-19-21-23-25-28T (10sp) |
| Chain | Shimano Tiagra, CN-4601 |
| Front hub | Shimano Claris, HB-2400 |
| Rear hub | Shimano Claris, FH-2400 |
| Rims | EXAL XR3, 622-13*24 mm |
| Tires | Kenda K1081 Kadence Premium, 60tpi, 700*23C |
| Brakes | Shimano Tiagra, BR-4600 |
| Handlebar | ID PROJECT Road, 131 mm Drop, 84 mm Reach, <=51 cm 420 mm else 440 mm |
| Stem | ID PROJECT, <=51 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia Nekar-Flow |

Frame Geometry Chart

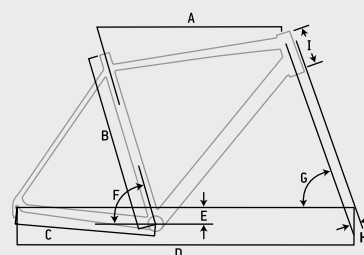

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|-------|--------|-------|--------|
| A | 400 | 450 | 500 | 550 | 600 |
| B | 513.6 | 535 | 555 | 585 | 605 |
| C | 400 | 450 | 500 | 550 | 600 |
| D | 405 | 405 | 405 | 405 | 405 |
| E | 975.0 | 975.9 | 982.9 | 998.6 | 1018.4 |
| F | 69 | 69 | 69 | 69 | 69 |
| G | 74°30' | 74° | 73°30' | 73° | 73° |
| H | 71° | 72° | 73° | 74° | 74° |
| I | 50 | 43 | 43 | 43 | 43 |
| I | 120 | 120 | 140 | 165 | 180 |


ONROAD

18sp



| | |
|--------------------------|---|
| Frame | Road Compact, AL7005-T4/T6 |
| Size | 40/45/50/55/60 cm |
| Fork | Road, straight carbon blades, alloy steerer |
| Front derailleur | Shimano Sora, FD-3500 |
| Rear derailleur | Shimano Sora, RD-3500 |
| Shifter | Shimano Sora, ST-3500 |
| Bottom bracket | Shimano BB-ES25 |
| Crank set | Shimano FC345, 50-34T, <=50 cm 170 mm, else 175mm |
| Cassette sprocket | Shimano CS-HG50, 12-13-14-15-17-19-21-23-25T (9sp) |
| Chain | Shimano CN-HG53 |
| Front hub | Shimano Claris, HB-2400 |
| Rear hub | Shimano Claris, FH-2400 |
| Rims | EXAL XR3, 622-13*24 mm |
| Tires | Kenda K152, 700x25C |
| Brakes | Shimano Claris, BR-2400 |
| Handlebar | ID PROJECT Road, 131 mm Drop, 84 mm Reach, <=51 cm 420 mm else 440 mm |
| Stem | ID PROJECT, <=51 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia X1-Flow |

Frame Geometry Chart



| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|-------|--------|-------|--------|
| A | 400 | 450 | 500 | 550 | 600 |
| B | 513.6 | 535 | 555 | 585 | 605 |
| C | 400 | 450 | 500 | 550 | 600 |
| D | 405 | 405 | 405 | 405 | 405 |
| E | 975.0 | 975.9 | 982.9 | 998.6 | 1018.4 |
| F | 69 | 69 | 69 | 69 | 69 |
| G | 74°30' | 74° | 73°30' | 73° | 73° |
| H | 71° | 72° | 73° | 74° | 74° |
| 1 | 50 | 43 | 43 | 43 | 43 |
| | 120 | 120 | 140 | 165 | 180 |


INTEMPO

24sp



| | |
|--------------------------|--|
| Frame | Road Compact, AL7005-T4/T6 |
| Size | 40/45/50/55/60 cm |
| Fork | Road, alloy blades, CrMo steerer |
| Front derailleur | Shimano Claris, FD-2403 |
| Rear derailleur | Shimano Claris, RD-2400 |
| Shifter | Shimano Claris, ST-2400 |
| Bottom bracket | Shimano BB-UN26 |
| Crank set | Shimano FC-A073, 50-39-30T, 170 mm |
| Cassette sprocket | Shimano CS-HG50, 12-13-15-17-19-21-23-25T (8sp) |
| Chain | Shimano CS-HG50 |
| Front hub | Shimano Claris, HB-2400 |
| Rear hub | Shimano Claris, FH-2400 |
| Rims | EXAL XR3, 622-13*24 mm |
| Tires | Kenda K152, 700x25C |
| Brakes | Promax Calipers |
| Handlebar | ID PROJECT Road, 131 mm Drop, 84 mm Reach, <=51 cm 420 mm else 440 mm |
| Stem | ID PROJECT, <=51 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia X1-Flow |

Frame Geometry Chart

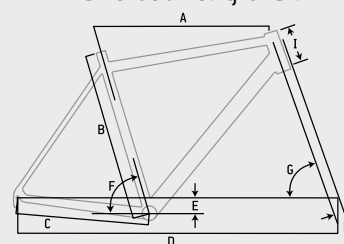

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|-------|--------|-------|--------|
| A | 400 | 450 | 500 | 550 | 600 |
| B | 513.6 | 535 | 555 | 585 | 605 |
| C | 400 | 450 | 500 | 550 | 600 |
| D | 405 | 405 | 405 | 405 | 405 |
| E | 975.0 | 975.9 | 982.9 | 998.6 | 1018.4 |
| F | 97.5 | 97.5 | 97.5 | 97.5 | 97.5 |
| G | 74°30' | 74° | 73°30' | 73° | 73° |
| H | 71° | 72° | 73° | 74° | 74° |
| I | 50 | 43 | 43 | 43 | 43 |
| 1 | 120 | 120 | 140 | 165 | 180 |


STREAMLITE

21sp



| | |
|--------------------------|--|
| Frame | Road Compact, AL7005-T4/T6 |
| Size | 40/45/50/55/60 cm |
| Fork | Road, alloy blades, CrMo steerer |
| Front derailleur | Shimano FD-A073 |
| Rear derailleur | Shimano RD-A070 |
| Shifter | Shimano ST-A070 |
| Bottom bracket | Shimano BB-UN26 |
| Crank set | Shimano FC-A073, 50-39-30T, 170 mm |
| Cassette sprocket | Shimano CS-HG20, 12-14-16-18-21-24-28T (7sp) |
| Chain | KMC Z51 |
| Front hub | Joytech Alloy QR |
| Rear hub | Shimano FH-RM30 |
| Rims | EXAL XR3, 622-13*24 mm |
| Tires | Kenda K152, 700x25C |
| Brakes | Promax Calipers |
| Handlebar | ID PROJECT Road, 131 mm Drop, 84 mm Reach, <=51 cm 420 mm else 440 mm |
| Stem | ID PROJECT, <=51 cm 90 mm else 100 mm, 7° |
| Seat post | ID PROJECT, 24 mm Offset, 31.6*350 mm |
| Saddle | Selle Italia X1-Flow |

Frame Geometry Chart

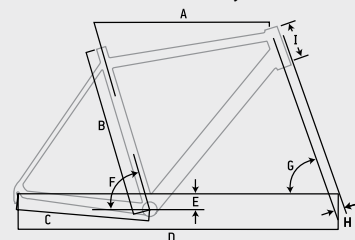

| FRAME SIZE | XS | S | M | L | XL |
|------------|--------|-------|--------|-------|--------|
| A | 400 | 450 | 500 | 550 | 600 |
| B | 400 | 450 | 500 | 550 | 600 |
| C | 405 | 405 | 405 | 405 | 405 |
| D | 975.0 | 975.9 | 982.9 | 998.6 | 1018.4 |
| E | 69 | 69 | 69 | 69 | 69 |
| F | 74°30' | 74° | 73°30' | 73° | 73° |
| G | 71° | 72° | 73° | 74° | 74° |
| H | 50 | 43 | 43 | 43 | 43 |
| 1 | 120 | 120 | 140 | 165 | 180 |



JUNIOR


STROBE 24 Disc

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 24, AL6061-T4/T6, UNI bent top tube |
| Size | 28 cm |
| Fork | ZOOM 386A, 60 mm |
| Front derailleur | Shimano Tourney, FDTY10 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Drive unit | Thun Sealed cartridge |
| Crank set | Dotek, 42-34-24T, 152 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Shimano HBTX505 |
| Rims | Mach-1 Eco ER-10, 507*19C |
| Tires | Kenda K1134, 50-507 (24*2.10) |
| Brakes | Shimano BRTX805 mechanical disc brake, 160 mm, Miranda V-brake |
| Handlebar | ID PROJECT, riser bar, 56 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 75 mm, 15° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Bassano Mito 24 |
| Kickstand | Center kickstand |

Frame Geometry Chart



| FRAME SIZE | | M/L |
|------------|---------------------|--------|
| | | 280 |
| A | TOP TUBE (parallel) | 506 |
| B | SEAT TUBE | 280 |
| C | REAR CENTER | 400 |
| D | WHEEL BASE | 9721 |
| E | BB DROP | 38 |
| F | SEAT ANGLE | 74° |
| G | HEAD ANGLE | 70°30' |
| H | OFFSET | 45 |


STROBE 24

21sp



| | |
|--------------------------|---|
| Frame | Hardtail 24, AL6061-T4/T6, UNI bent top tube |
| Size | 28 cm |
| Fork | ZOOM 327E, 40 mm |
| Front derailleur | Shimano Tourney, FDTY10 |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano STEF51 |
| Drive unit | Thun Sealed cartridge |
| Crank set | Dotek, 42-34-24T, 152 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z51 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco ER-10, 507*19C |
| Tires | Kenda K1134, 50-507 (24*2.10) |
| Brakes | Miranda V-brake |
| Handlebar | ID PROJECT, riser bar, 56 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 75 mm, 15° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Bassano Mito 24 |
| Kickstand | Center kickstand |

Frame Geometry Chart



| FRAME SIZE | | M/L |
|------------|---------------------|--------|
| | | 280 |
| A | TOP TUBE (parallel) | 506 |
| B | SEAT TUBE | 280 |
| C | REAR CENTER | 400 |
| D | WHEEL BASE | 9721 |
| E | BB DROP | 38 |
| F | SEAT ANGLE | 74° |
| G | HEAD ANGLE | 70°30' |
| H | OFFSET | 45 |


STROBE 20

7sp



| | |
|--------------------------|---|
| Frame | Hardtail 20, AL6061-T4/T6, UNI bent top tube |
| Size | 25 cm |
| Fork | ZOOM 327E, 30 mm |
| Rear derailleur | Shimano Tourney, RDTY300 |
| Shifter | Shimano SLRS36 |
| Drive unit | Thun Sealed cartridge |
| Crank set | Prowheel, 36T, 140 mm |
| Cassette sprocket | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Chain | KMC Z50 |
| Front hub | Joytech |
| Rear hub | Joytech |
| Rims | Mach-1 Eco 110 Evolution, 406*21C |
| Tires | Kenda K879, 54-406 (20*2.00) |
| Brakes | Miranda Elegance cold forged V-brakes |
| Handlebar | ID PROJECT, riser bar, 54 cm, backsweep 6°, bise 20 mm, 25.4 mm |
| Stem | ID PROJECT, 40 mm, 30° |
| Seat post | ID PROJECT, alloy tube, 27.2*300 mm |
| Saddle | Selle Bassano Mito 24 |
| Kickstand | Center kickstand |

Frame Geometry Chart

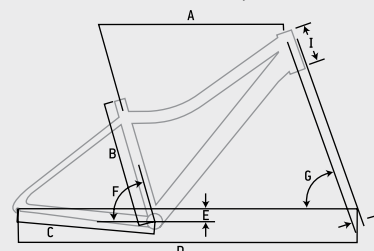

| FRAME SIZE | | M/L |
|------------|---------------------|------|
| | | 250 |
| A | TOP TUBE (parallel) | 4516 |
| B | SEAT TUBE | 250 |
| C | REAR CENTER | 365 |
| D | WHEEL BASE | 880 |
| E | BB DROP | 0 |
| F | SEAT ANGLE | 73° |
| G | HEAD ANGLE | 71° |
| H | OFFSET | 45 |


CONDOR 20

6sp



| | |
|--------------------------|---|
| Frame | Hardtail 20, HiTen |
| Size | 28 cm |
| Fork | Rigid, HiTen |
| Rear derailleur | Shimano Tourney, FDTY10 |
| Shifter | Shimano Tourney, RDTY300 |
| Drive unit | Shimano STEF51 |
| Crank set | Thun Sealed cartridge |
| Cassette sprocket | Dotek, 42-34-24T, 152 mm |
| Chain | Shimano MFTZ21, 14-16-18-20-22-24-28T |
| Front hub | KMC Z51 |
| Rear hub | Joytech |
| Rims | Joytech |
| Tires | Mach-1 Eco ER-10, 507*19C |
| Brakes | Kenda K1134, 50-507 (24*2.10) |
| Handlebar | Miranda V-brake |
| Stem | ID PROJECT, riser bar, 56 cm, backsweep 6°, rise 20 mm, 25.4 mm |
| Seat post | ID PROJECT, 75 mm, 15° |
| Saddle | ID PROJECT, alloy tube, 27.2*300 mm |
| Kickstand | Center kickstand |

Frame Geometry Chart

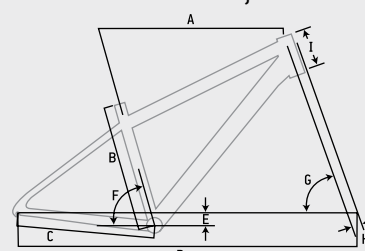

| FRAME SIZE | | M/L |
|------------|---------------------|-------|
| | | 280 |
| A | TOP TUBE (parallel) | 464.9 |
| B | SEAT TUBE | 280 |
| C | REAR CENTER | 365 |
| D | WHEEL BASE | 880 |
| E | BB DROP | 0 |
| F | SEAT ANGLE | 73° |
| G | HEAD ANGLE | 71° |
| H | OFFSET | 45 |


V-TRACK 12/14/16/18



Color options available for all sizes 12" - 14" - 16" - 18"


| | |
|--------------------------|--|
| Frame | Hardtail, AL6061-T4/T6 |
| Size | 25/23/21/21 cm |
| Fork | Rigid, HiTen |
| Bottom bracket | Cups |
| Crank set | One-Piece, 32T/32T/28T/28T |
| Cassette sprocket | 18T |
| Chain | KMC |
| Front hub | Oversize |
| Rear hub | Oversize |
| Rims | Aluminium |
| Tires | 18"x2.125/16"x2.125/14"x2.125/12-1/2"x2-1/4" |
| Brakes | CALIPERS |
| Handlebar | Riser Bar, 52cm/52cm/48cm/48cm Wide, 80mm RISE |
| Stem | 30mm Extension, 15cm QUILL |
| Seat post | 27.2mm x 250mm |
| Saddle | BOYS/GIRLS Comfort, w/Proteccion |
| Kickstand | Training Wheels |

STROBE 27,5 UNI / ZIG ZAG 27,5 UNI




| FRAME SIZE | | XS | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 360 | 400 | 440 | 480 | 520 |
| B | SEAT TUBE | 360 | 400 | 440 | 480 | 520 |
| C | REAR CENTER | 430 | 430 | 430 | 430 | 430 |
| D | WHEEL BASE | 1052.7 | 1052.7 | 1072.7 | 1093.3 | 1113.8 |
| E | BB DROP | 45 | 45 | 45 | 45 | 45 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70° | 70° | 70° | 70° | 70° |
| H | OFFSET | 44 | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 100 | 110 | 120 | 120 | 130 |

CROSSMO L / MULTIGO L / TRAVELON L / EZIGO L

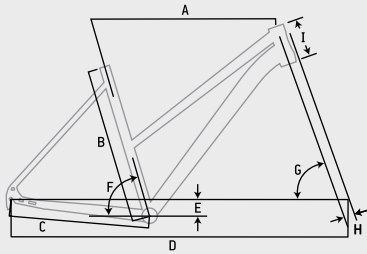


| FRAME SIZE | | M | L | XL |
|------------|---------------------|--------|--------|--------|
| A | TOP TUBE (parallel) | 460 | 500 | 540 |
| B | SEAT TUBE | 460 | 500 | 540 |
| C | REAR CENTER | 450 | 450 | 450 |
| D | WHEEL BASE | 1084.5 | 1096.6 | 1105.9 |
| E | BB DROP | 50 | 50 | 50 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 150 |

NERGETIC L

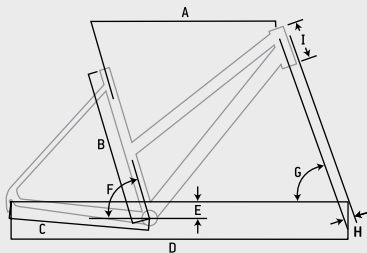


| FRAME SIZE | | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|
| A | TOP TUBE (parallel) | 420 | 470 | 530 | 580 |
| B | SEAT TUBE | 420 | 470 | 530 | 580 |
| C | REAR CENTER | 450 | 450 | 450 | 450 |
| D | WHEEL BASE | 1072.6 | 1078.6 | 1089.3 | 1095.5 |
| E | BB DROP | 55 | 55 | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 71° | 71° | 71° | 71° |
| H | OFFSET | 45 | 45 | 45 | 45 |
| I | HEAD TUBE | 120 | 130 | 140 | 160 |

MULTIGO W / TRAVELON W / EZIGO W

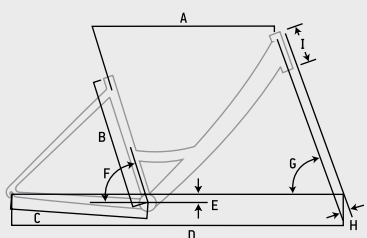


| FRAME SIZE | | S | M | L |
|------------|---------------------|------|--------|--------|
| A | TOP TUBE (parallel) | 400 | 460 | 530 |
| B | SEAT TUBE | 400 | 460 | 530 |
| C | REAR CENTER | 460 | 460 | 460 |
| D | WHEEL BASE | 1114 | 1124.5 | 1134.5 |
| E | BB DROP | 55 | 55 | 55 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 69° | 69° | 69° |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 175 | 175 | 175 |

CITYCOMM




| FRAME SIZE | | S | M |
|------------|---------------------|--------|--------|
| | | 460 | 530 |
| A | TOP TUBE (parallel) | 607 | 612 |
| B | SEAT TUBE | 460 | 530 |
| C | REAR CENTER | 460 | 460 |
| D | WHEEL BASE | 1113.2 | 1118.2 |
| E | BB DROP | 72 | 72 |
| F | SEAT ANGLE | 72°30' | 72°30' |
| G | HEAD ANGLE | 70° | 70° |
| H | OFFSET | 45 | 45 |
| I | HEAD TUBE | 170 | 170 |

ORAMA 323 DC8 M / ORAMA 353 D8 M / ORAMA 323 C7 M / ORAMA 420 E9 M

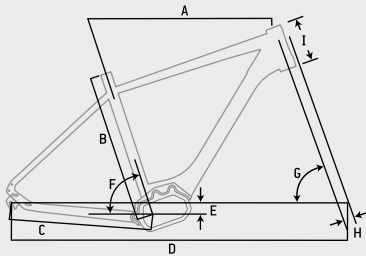


| FRAME SIZE | | S | M | L | XL |
|------------|---------------------|--------|--------|--------|--------|
| | | 460 | 500 | 540 | 580 |
| A | TOP TUBE (parallel) | 560 | 570 | 585 | 600 |
| B | SEAT TUBE | 460 | 500 | 540 | 580 |
| C | REAR CENTER | 475 | 475 | 475 | 475 |
| D | WHEEL BASE | 1086.9 | 1097.3 | 1113 | 1128.5 |
| E | BB DROP | 60 | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 44 | 44 | 44 | 44 |
| I | HEAD TUBE | 145 | 155 | 170 | 180 |

ORAMA 323 DC8 L / ORAMA 353 D8 L / ORAMA 323 C7 L / ORAMA 420 E9 L



| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| | | 460 | 500 | 540 |
| A | TOP TUBE (parallel) | 560 | 570 | 585 |
| B | SEAT TUBE | 460 | 500 | 540 |
| C | REAR CENTER | 475 | 475 | 475 |
| D | WHEEL BASE | 1088 | 1098.5 | 1113.9 |
| E | BB DROP | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 44 | 44 | 44 |
| I | HEAD TUBE | 170 | 180 | 190 |

ORAMA 323 DC8 W / ORAMA 353 D8 W / ORAMA 323 C7 W / ORAMA 420 E9 W



| FRAME SIZE | | S | M | L |
|------------|---------------------|--------|--------|--------|
| | | 420 | 470 | 520 |
| A | TOP TUBE (parallel) | 570 | 580 | 590 |
| B | SEAT TUBE | 420 | 470 | 520 |
| C | REAR CENTER | 475 | 475 | 475 |
| D | WHEEL BASE | 1099.1 | 1109.1 | 1119.1 |
| E | BB DROP | 60 | 60 | 60 |
| F | SEAT ANGLE | 73° | 73° | 73° |
| G | HEAD ANGLE | 70°30' | 70°30' | 70°30' |
| H | OFFSET | 45 | 45 | 45 |
| I | HEAD TUBE | 160 | 170 | 180 |

A large, light gray decorative graphic on the right side of the page, consisting of a thick curved line and a triangular shape pointing towards the bottom right.

A series of horizontal dotted lines for writing, spanning the width of the page.

MY16090316INT1500

NIKOS MANIATOPOULOS S.A.
INDUSTRIAL & TRADING CYCLE COMPANY

265 04 Agios Vassilios, Patras, Greece
Tel.: +30 2610 993 045, Fax: +30 2610 990 424
E-mail: commerce@idealbikes.gr

www.idealbikes.net

2016
RANGE



 **IDEAL**
BIKES