

# BIKE COLLECTION 2011



GEOMETRY



2011  
ideal  
bikes



# index

## 06 mountain

RACE PRO team  
RACE PRO comp  
RACE PRO  
TRAXER  
BOOMMAX  
HILLMASTER H-disc  
HILLMASTER M-disc  
ZIGZAG  
PRORIDER disc  
PRORIDER  
STROBE disc  
STROBE  
FREEDER disc  
FREEDER

## 24 dirt

JUMP UP  
BUMP disc  
BUMP

## 30 full suspension

VSR pro  
VSR comp  
STROKE  
AXION

## 36 trekking off road

INTEGRATOR  
ERGOMAX disc  
ERGOMAX  
MEGISTO disc  
MEGISTO  
CROSSMO  
NERGETIC

## 48 urban

CHICANE  
CITYRUN  
INDIGO

## 54 sport touring

FUTOUR  
MULTIGO  
TRAVELON  
EZIGO

## 64 city

TESTEK  
INNERCITY  
CITYLIFE  
UNIGO

## 72 road

STAGE team  
STAGE  
ONROAD  
INTEMPO

## 80 junior 24

STROBE disc  
STROBE  
AXION disc  
AXION

## 82 junior 20

STROBE

## 83 junior 18-16-14-12

V-TRACK

## 86 freestyle

X-TEN  
X-SIX

# our philosophy

Our design and manufacturing philosophy throughout the 80 years of our history has been simple and stable. Stay close to market trends and user needs, create bicycles based on quality and safety, work on aesthetics and functionality, keep the value for money ratio at a high level.

The homogeneity and consistent performance of the parts we use on our bicycles like brakes, wheels and transmission systems, has established IDEAL as a reliable European bicycle brand. We care about your safety. All IDEAL bicycles are built according to the most recent European safety standards.

The catalog in your hands presents IDEAL 2011 range. We hope it can help you choose the IDEAL bicycle that will accompany you for many joyful, trouble free riding experiences.

# mountain bikes



# U6

## RACE PRO team

WHEEL 26"

SPEED 27

### FRAME

UD-CARBON,  
40-44-49-53cm, 1050gr

### FORK

MAGURA DURIN AIR,  
100mm, RL

### TRANSMISSION

SHIMANO XT

### BRAKES

SHIMANO XT HYDRAULIC  
180-160mm

### WHEELS

SHIMANO XT


# official team bike



Race-Pro-Team has been the Ideal cross-country racing machine through the years.

On top of visibility and legacy, Race-Pro-Team created the platform for the development of frame geometries, the selection of technologies and our support to numerous riders, both amateur and professional, that chose to share their passion, energy and time with us and our bicycles.

We can only thank them and promise that riding an Ideal bicycle will remain a joy thanks to them.

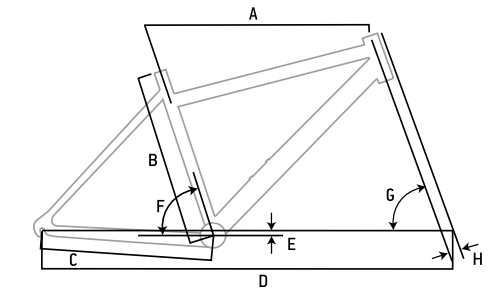


FRAME GEOMETRY CHART				
FRAME SIZE	400	440	490	530
A TOP TUBE	556	580	595	605
B SEAT TUBE	400	440	490	530
C REAR CENTER	415	420	425	430
D WHEEL BASE	1033	1058	1079	1096
E B.B. DROP	38	38	38	38
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	70°	70°	70°	70°
H OFFSET	38	38	38	38

Technical Specifications subject to change




- FRAME UD-CARBON HARDTAIL 41/46/51cm
- FORK ROCK SHOX RECON-SILVER-TK W/POPLOC
- TRANSMISSION SHIMANO NEW-10sp XT M773 SHADOW, SHIMANO NEW-10sp M552 42/32/24T\*170/175mm
- BRAKES SHIMANO DEORE M595 HYDRAULIC DISC BRAKES, CENTER-LOCK 180/160mm ROTORS
- OPTION 27sp ECO VERSION

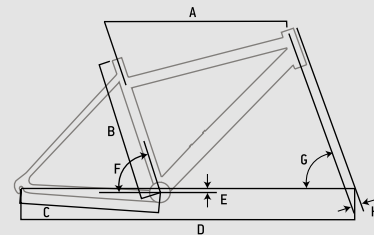

FRAME GEOMETRY CHART			
FRAME SIZE	410	460	510
A TOP TUBE	571	582	600
B SEAT TUBE	411	462	513
C REAR CENTER	425	425	425
D WHEEL BASE	1038	1049	1080
E B.B. DROP	35	35	35
F SEAT ANGLE	72°24'	72°24'	72°24'
G HEAD ANGLE	71°	71°	71°
H OFFSET	38	38	38



- FRAME AL7005-T4/T6 MTB-HARDTAIL TRIPLE BUTTED 41/46/51/56cm
- FORK ROCK SHOX RECON-SILVER-TK, 100mm TRAVEL, W/POPLOC
- TRANSMISSION SHIMANO NEW-10sp XT M773 SHADOW, SHIMANO NEW-10sp XT M770 42/32/24T\*170/175mm
- BRAKES SHIMANO XT M775 HYDRAULIC DISCS

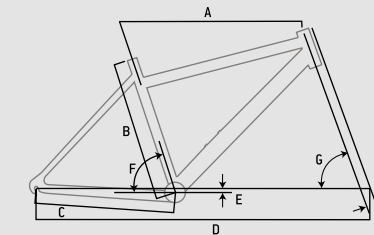

FRAME GEOMETRY CHART				
FRAME SIZE	410	460	510	560
A TOP TUBE	555	578	589	610
B SEAT TUBE	415	465	515	565
C REAR CENTER	425	425	425	425
D WHEEL BASE	1043	1062	1068	1089
E B.B. DROP	38	38	38	38
F SEAT ANGLE	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39


# 10

## TRAXER

WHEEL 26"  
SPEED 30



FRAME AL7005-T4/T6 MTB-HARDTAIL TRIPLE BUTTED 41/46/51/56cm  
 FORK RST F1RST-AIR-SRL, 100mm TRAVEL, REMOTE LOCKOUT  
 TRANSMISSION SHIMANO NEW-10sp XT M773 SHADOW, SHIMANO NEW-10sp  
 M552 42/32/24T\*170/175mm  
 BRAKES SHIMANO DEORE M595 HYDRAULIC DISCS

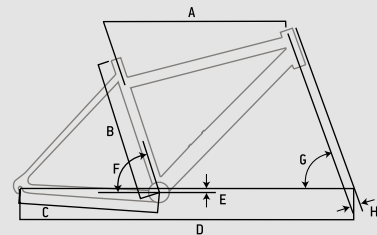

FRAME GEOMETRY CHART				
FRAME SIZE	410	460	510	560
A TOP TUBE	555	578	589	610
B SEAT TUBE	415	465	515	565
C REAR CENTER	425	425	425	425
D WHEEL BASE	1043	1062	1068	1089
E B.B. DROP	38	38	38	38
F SEAT ANGLE	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39




WHEEL 26"  
SPEED 30

## BOOMMAX



FRAME AL7005-T4/T6 MTB-HARDTAIL TRIPLE BUTTED 41/46/51/56cm  
 FORK RST GILA-PRO-RL, 100mm TRAVEL, REMOTE LOCKOUT  
 TRANSMISSION SHIMANO NEW-10sp SLX M663 SHADOW, SHIMANO NEW-10sp  
 M552 42/32/24T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

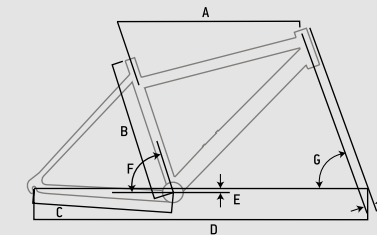

FRAME GEOMETRY CHART				
FRAME SIZE	410	460	510	560
A TOP TUBE	555	578	589	610
B SEAT TUBE	415	465	515	565
C REAR CENTER	425	425	425	425
D WHEEL BASE	1043	1062	1068	1089
E B.B. DROP	38	38	38	38
F SEAT ANGLE	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39


12

# HILLMASTER H-disc

WHEEL 26"  
SPEED 27



- FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm  
 FORK RST GILA-PRO-RL, 100mm TRAVEL, REMOTE LOCKOUT  
 TRANSMISSION SHIMANO DEORE M592 SHADOW, SHIMANO NEW-ALIVIO M430  
 OCTALINK 44/32/22T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

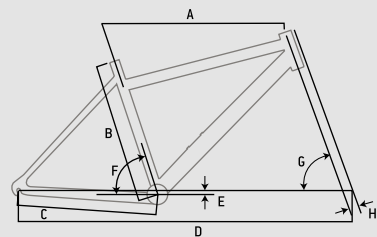

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1062	1068	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39


13

# HILLMASTER M-disc

WHEEL 26"  
SPEED 27



- FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm  
 FORK RST GILA-PRO-ML, 100mm TRAVEL, PRELOAD  
 & MECHANICAL-LOCKOUT  
 TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO NEW-ALIVIO M430  
 OCTALINK 44/32/22T\*170/175mm  
 BRAKES SHIMANO M416 MECHANICAL DISCS  
 COLOR OPTION SCOTCH BRITE POLISH

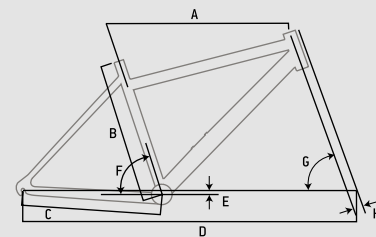

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1062	1068	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39






WHEEL 26"  
SPEED 24



FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm  
 FORK RST GILA-PRO-ML, 100mm TRAVEL, PRELOAD & MECHANICAL-LOCKOUT  
 TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO ACERA M361  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

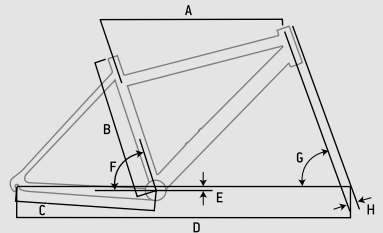

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	390	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1062	1068	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

# 16

## PRO RIDER disc

WHEEL 26"  
SPEED 24



WHEEL 26"  
SPEED 24

## PRO RIDER




FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm

FORK RST GILA-PRO-ML, 100mm TRAVEL, PRELOAD & MECHANICAL-LOCKOUT

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO M171 42/34/24T\*170mm

BRAKES SHIMANO M416 MECHANICAL DISCS

COLOR OPTIONS SATIN BLACK, WHITE

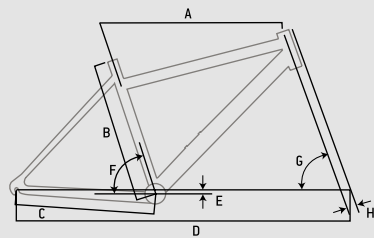


FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1062	1068	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm

FORK RST GILA-PRO-ML, 100mm TRAVEL, PRELOAD & MECHANICAL-LOCKOUT

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO ACERA M361 42/32/22T\*170/175mm

BRAKES SHIMANO M422 V-BRAKES

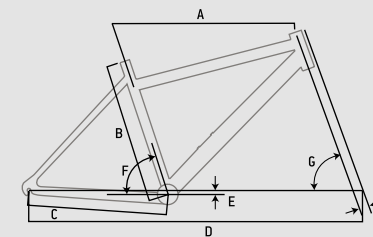


FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1062	1068	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

18

STROBE  
discWHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm  
 FORK RST CAPA-T, 80mm TRAVEL, PRELOAD  
 TRANSMISSION SHIMANO ACERA M360, SHIMANO M171  
 42/34/24T\*170mm  
 BRAKES PROMAX MECHANICAL DISCS

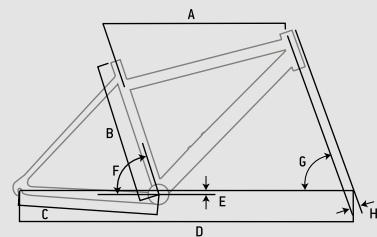


FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1041	1041	1060	1066	1087
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

19

## STROBE

WHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 MTB-HARDTAIL 38/41/46/51/56cm  
 FORK RST CAPA-T, 80mm TRAVEL, PRELOAD  
 TRANSMISSION SHIMANO ACERA M360, SHIMANO M171  
 42/34/24T\*170mm  
 BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

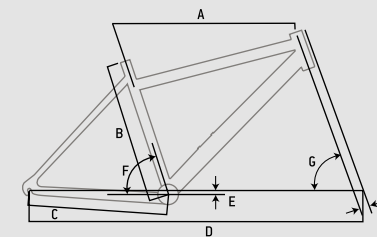

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	555	555	578	589	610
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1041	1041	1060	1066	1087
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

20


FREEDER  
discWHEEL 26"  
SPEED 21

FRAME AL6061-T4/T6 MTB-HARDTAIL, 38/41/46/51/56cm

FORK ZOOM BRAVO, 50mm TRAVEL

TRANSMISSION SHIMANO TX35

BRAKES PROMAX MECHANICAL DISCS

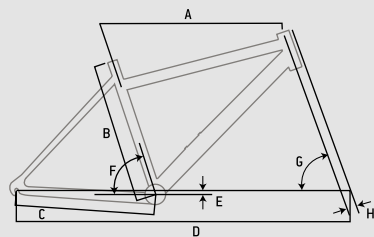

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	553	553	576	587	608
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1061	1067	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

21

## FREEDER


WHEEL 26"  
SPEED 21FRAME AL6061-T4/T6 MTB-HARDTAIL,  
M:38/41/46/51/56cm, L:38/41/46cm

FORK ZOOM BRAVO, 50mm TRAVEL

TRANSMISSION SHIMANO TX35

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

COLOR OPTION SATIN BLACK

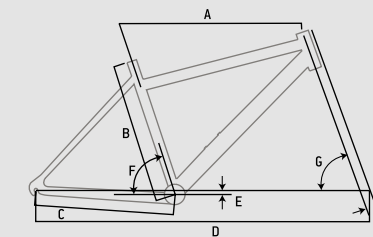

FRAME GEOMETRY CHART					
FRAME SIZE	380	410	460	510	560
A TOP TUBE	553	553	576	587	608
B SEAT TUBE	380	415	465	515	565
C REAR CENTER	425	425	425	425	425
D WHEEL BASE	1044	1044	1061	1067	1089
E B.B. DROP	38	38	38	38	38
F SEAT ANGLE	74°	74°	73°30'	73°30'	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'	71°	71°
H OFFSET	39	39	39	39	39

For frame geometry chart of Ladies version, refer to page 108

dirt bikes




24

## JUMP UP

WHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 DIRT-REINFORCED, 38/42cm  
 FORK RST LAUNCH-T, 130mm TRAVEL, PRELOAD  
 TRANSMISSION SHIMANO DEORE M590, SHIMANO ACERA M361  
 42/32/22T\*170/175mm  
 BRAKES SHIMANO M416 MECHANICAL DISCS

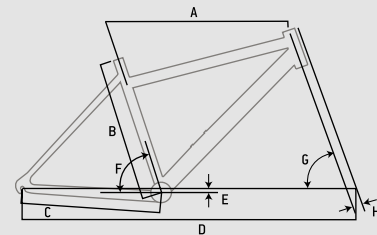


FRAME GEOMETRY CHART		
FRAME SIZE	380	420
A TOP TUBE	560	570
B SEAT TUBE	380	420
C REAR CENTER	420	420
D WHEEL BASE	1039	1049
E B.B. DROP	20	20
F SEAT ANGLE	71°	71°
G HEAD ANGLE	69°	69°
H OFFSET	42	42

25

## BUMP disc

WHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 DIRT-REINFORCED, 38/42cm  
 FORK RST LAUNCH-T, 130mm TRAVEL, PRELOAD  
 TRANSMISSION SHIMANO DEORE M531, SHIMANO ACERA M361  
 42/32/22T\*170/175mm  
 BRAKES SHIMANO M416 MECHANICAL DISCS

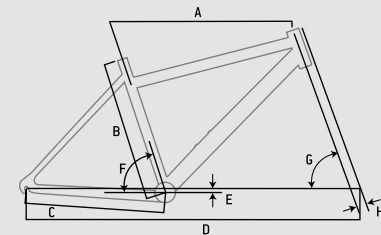

FRAME GEOMETRY CHART		
FRAME SIZE	380	420
A TOP TUBE	560	570
B SEAT TUBE	380	420
C REAR CENTER	420	420
D WHEEL BASE	1039	1049
E B.B. DROP	20	20
F SEAT ANGLE	71°	71°
G HEAD ANGLE	69°	69°
H OFFSET	42	42




WHEEL 26"  
SPEED 24

BUMP



FRAME AL7005-T4/T6 DIRT-REINFORCED, 38/42cm  
 FORK RST LAUNCH-T, 130mm TRAVEL, PRELOAD  
 TRANSMISSION SHIMANO ACERA M360, SHIMANO ACERA M361  
 42/32/22T\*170/175mm  
 BRAKES SHIMANO M422 V-BRAKES

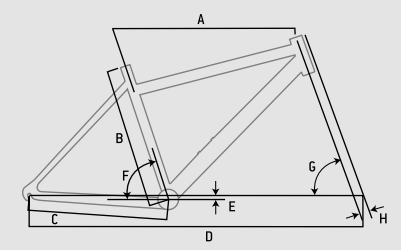

FRAME GEOMETRY CHART		
FRAME SIZE	380	420
A TOP TUBE	560	570
B SEAT TUBE	380	420
C REAR CENTER	420	420
D WHEEL BASE	1039	1049
E B.B. DROP	20	20
F SEAT ANGLE	71°	71°
G HEAD ANGLE	69°	69°
H OFFSET	42	42

# full suspension bikes






30

VSR pro

WHEEL 26"  
SPEED 27

FRAME AL7005-T4/T6 4-LINK SUSPENSION 40/44/49/53cm  
 FORK RST TITAN-AIR-SRL, 100mm TRAVEL, REMOTE LOCKOUT  
 SHOCK RST ELEMENT, PRELOAD, REBOUND, LOCKOUT  
 TRANSMISSION SHIMANO XT M772 SHADOW, SHIMANO DEORE M590  
 44/32/22T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

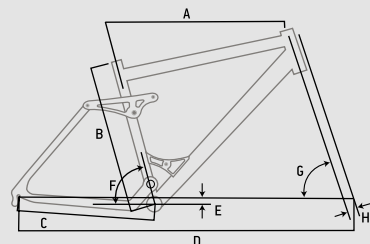


FRAME GEOMETRY CHART				
FRAME SIZE	400	440	490	530
A TOP TUBE	560	580	595	605
B SEAT TUBE	400	440	490	530
C REAR CENTER	430	430	430	430
D WHEEL BASE	1055	1075	1090	1101
E B.B. DROP	5	5	5	5
F SEAT ANGLE	72°30'	72°30'	72°30'	72°30'
G HEAD ANGLE	70°	70°	70°	70°
H OFFSET	38	38	38	38

31

VSR comp

WHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 4-LINK SUSPENSION 40/44/49/53cm  
 FORK RST GILA-PRO-RL, 100mm TRAVEL, REMOTE LOCKOUT  
 SHOCK KIND-SHOCK A5-RE AIR SHOCK  
 TRANSMISSION SHIMANO DEORE M592 SHADOW, SHIMANO ACERA M361  
 OCTALINK 42/32/22T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

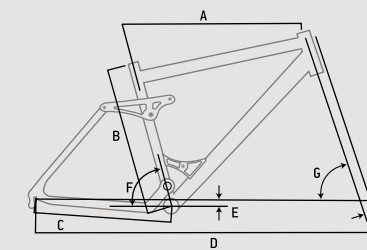

FRAME GEOMETRY CHART				
FRAME SIZE	400	440	490	530
A TOP TUBE	560	580	595	605
B SEAT TUBE	400	440	490	530
C REAR CENTER	430	430	430	430
D WHEEL BASE	1055	1075	1090	1101
E B.B. DROP	5	5	5	5
F SEAT ANGLE	72°30'	72°30'	72°30'	72°30'
G HEAD ANGLE	70°	70°	70°	70°
H OFFSET	38	38	38	38

32

STROKE


WHEEL 26"  
SPEED 24

33

AXION


WHEEL 26"  
SPEED 24

FRAME AL7005-T4/T6 ACTIVE-GEOMETRY SUSPENSION 42/47/52/57cm  
 FORK RST CAPA-ML, 80mm TRAVEL, PRELOAD & MECHANICAL-LOCKOUT  
 TRANSMISSION SHIMANO ACERA M360, SHIMANO M171 42/34/24T\*170mm  
 BRAKES PROMAX MECHANICAL DISCS

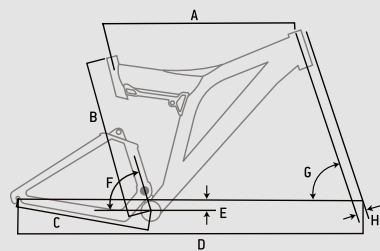

FRAME GEOMETRY CHART				
FRAME SIZE	420	470	520	570
A TOP TUBE	554	577	588	611
B SEAT TUBE	420	470	520	570
C REAR CENTER	425	425	425	425
D WHEEL BASE	1046	1069	1081	1104
E B.B. DROP	16	16	16	16
F SEAT ANGLE	73°30'	73°30'	73°30'	73°30'
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45

FRAME AL7005-T4/T6 ACTIVE-GEOMETRY SUSPENSION 42/47/52/57cm  
 FORK ZOOM BRAVO, 50mm TRAVEL  
 TRANSMISSION SHIMANO ACERA M360, SHIMANO M171 42/34/24T\*170mm  
 BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

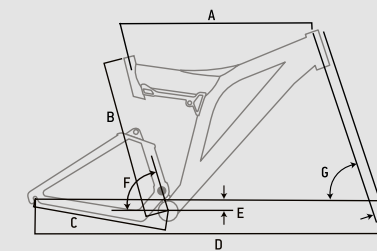

FRAME GEOMETRY CHART				
FRAME SIZE	420	470	520	570
A TOP TUBE	554	577	588	611
B SEAT TUBE	420	470	520	570
C REAR CENTER	425	425	425	425
D WHEEL BASE	1046	1069	1081	1104
E B.B. DROP	16	16	16	16
F SEAT ANGLE	73°30'	73°30'	73°30'	73°30'
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45

trekking off road  
bikes




36

INTEGRATOR

WHEEL 700C  
SPEED 27

FRAME AL7005-T4/T6 CROSS-TREKKING, 42/46/50/54/58cm  
 FORK RST VOGUE-AIR-PRO-SRL, 75mm TRAVEL, REMOTE LOCKOUT  
 TRANSMISSION SHIMANO DEORE M592 SHADOW, SHIMANO NEW-ALIVIO M430  
 OCTALINK 48/36/26T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

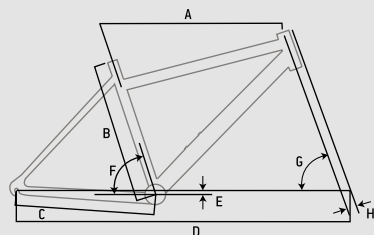


FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

37

ERGOMAX  
discWHEEL 700C  
SPEED 24

FRAME AL7005-T4/T6 CROSS-TREKKING, 42/46/50/54/58cm  
 FORK RST NEON-PRO-ML, 75mm TRAVEL, PRELOAD & MECHANICAL LOCKOUT  
 TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO ACERA M361  
 48/38/28T\*170/175mm  
 BRAKES SHIMANO M445 HYDRAULIC DISCS

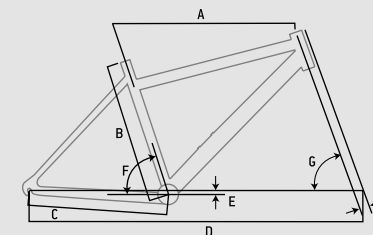

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

38

ERGOMAX


WHEEL 700C  
SPEED 27

FRAME AL7005-T4/T6 CROSS-TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm

FORK RST NEON-PRO-ML, 75mm TRAVEL, PRELOAD & MECH. LOCKOUT

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO NEW-ALIVIO M430  
OCTALINK 48/36/26T\*170/175mm

BRAKES SHIMANO M422 V-BRAKES

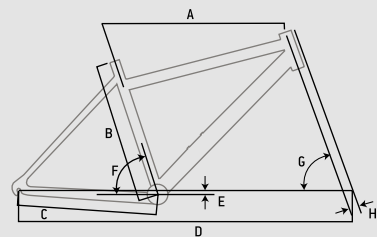

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

For frame geometry chart of Ladies version, refer to page 108

39


MEGISTO  
discWHEEL 700C  
SPEED 24

FRAME AL7005-T4/T6 CROSS-TREKKING, 42/46/50/54/58cm

FORK RST NEON-PRO-T, 75mm TRAVEL, PRELOAD ADJUSTMENT

TRANSMISSION SHIMANO ACERA M360, SHIMANO M171 48/38/28T\*170mm

BRAKES SHIMANO M416 MECHANICAL DISCS

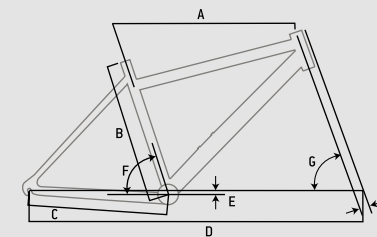

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45




WHEEL 700C  
SPEED 24

# 4 | MEGISTO

- FRAME AL7005-T4/T6 CROSS-TREKKING, M:42/46/50/54/58cm, L:40/44/48/52cm
- FORK RST NEON-PRO-T, 75mm TRAVEL, PRELOAD ADJUSTMENT
- TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO M171 48/38/28T\*170mm
- BRAKES SHIMANO M422 V-BRAKES

For frame geometry chart of Ladies version, refer to page 108

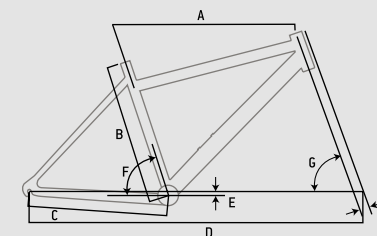

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

42

CROSSMO

WHEEL 700C  
SPEED 24

43




FRAME AL6061-T4/T6 CROSS-TREKKING,  
M:42/47/53/58cm, L:40/46/53cm


FORK RST 777-T, 50mm TRAVEL, PRELOAD ADJUSTMENT

TRANSMISSION SHIMANO ACERA M360, SHIMANO M131 48/38/28T\*170mm

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

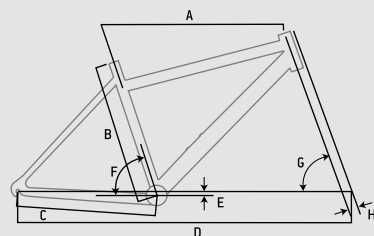

FRAME GEOMETRY CHART				
FRAME SIZE	420	470	530	580
A TOP TUBE	575	581	589	596
B SEAT TUBE	420	470	530	580
C REAR CENTER	450	450	450	450
D WHEEL BASE	1071	1077	1087	1094
E B.B. DROP	55	55	55	55
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45

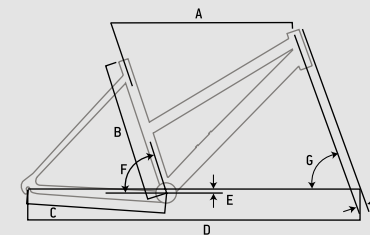

FRAME GEOMETRY CHART				
FRAME SIZE	400	460	530	580
A TOP TUBE	563	581	589	589
B SEAT TUBE	400	460	530	580
C REAR CENTER	450	450	450	450
D WHEEL BASE	1059	1079	1087	1087
E B.B. DROP	55	55	55	55
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45

44

ENERGETIC


WHEEL 700C  
SPEED 21

FRAME AL6061-T4/T6 CROSS-TREKKING,  
M:42/47/53/58cm, L:40/46/53cm

FORK ZOOM BRAVO, 30mm TRAVEL


TRANSMISSION SHIMANO TX35

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

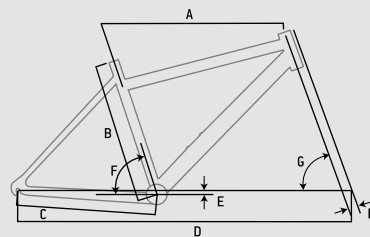

FRAME GEOMETRY CHART				
FRAME SIZE	420	470	530	580
A TOP TUBE	575	581	589	596
B SEAT TUBE	420	470	530	580
C REAR CENTER	450	450	450	450
D WHEEL BASE	1071	1077	1087	1094
E B.B. DROP	55	55	55	55
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45

COLOR OPTIONS SILK LIGHT BLUE, WHITE (FOR LADIES ONLY)

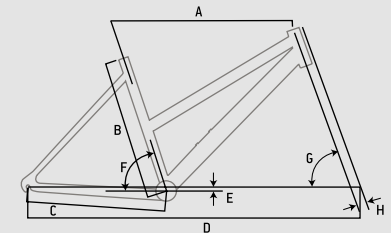

FRAME GEOMETRY CHART			
FRAME SIZE	400	460	530
A TOP TUBE	563	581	589
B SEAT TUBE	400	460	530
C REAR CENTER	450	450	450
D WHEEL BASE	1059	1079	1087
E B.B. DROP	55	55	55
F SEAT ANGLE	73°	73°	73°
G HEAD ANGLE	71°	71°	71°
H OFFSET	45	45	45

45



urban bikes



# 48

## CHICANE

WHEEL 700C  
SPEED 27




**FRAME** AL7005-T4/T6 CROSS-TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm


**FORK** RST SINGLE-SHOCK-M7-T HEAD-SHOCK, 40mm TRAVEL,  
PRELOAD ADJUSTMENT

**TRANSMISSION** SHIMANO DEORE M592 SHADOW, SHIMANO DEORE M590  
48/36/26T\*170/175mm

**BRAKES** SHIMANO DEORE M590 V-BRAKES

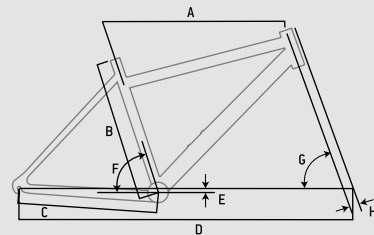

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

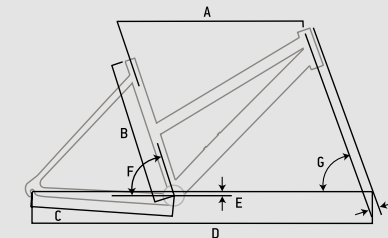

FRAME GEOMETRY CHART					
FRAME SIZE	400	440	480	520	
A TOP TUBE	570	580	590	600	
B SEAT TUBE	400	440	480	520	
C REAR CENTER	440	440	440	440	
D WHEEL BASE	1065	1075	1086	1096	
E B.B. DROP	50	50	50	50	
F SEAT ANGLE	73°	73°	73°	73°	
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	
H OFFSET	45	45	45	45	

50

CITYRUN


WHEEL 700C  
SPEED 24

FRAME AL7005-T4/T6 CROSS-TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm

FORK RIGID ALLOY TREKKING

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO M171 48/38/28T\*170mm

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

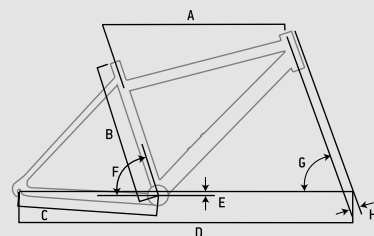

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

For frame geometry chart of Ladies version, refer to page 108

51

INDIGO


WHEEL 700C  
SPEED 21

FRAME AL7005-T4/T6 CROSS-TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm

FORK RIGID HI-TEN

TRANSMISSION SHIMANO ACERA M360

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

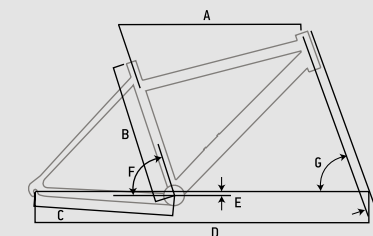

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

For frame geometry chart of Ladies version, refer to page 108

sport touring  
bikes






FRAME AL7005-T4/T6 TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm

FORK RST SINGLE-SHOCK-M7-T HEAD-SHOCK, 40mm TRAVEL,  
PRELOAD ADJUSTMENT

TRANSMISSION SHIMANO XT M772 SHADOW, SHIMANO DEORE M590  
48/36/26T\*170/175mm, W/BB

BRAKES SHIMANO DEORE M590 V-BRAKES

For frame geometry chart of Ladies and Wave version, refer to page 108

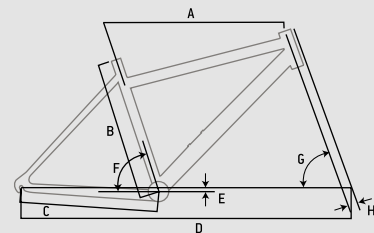

FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45




FRAME AL7005-T4/T6 TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm

FORK RST NEON-PRO-ML, 75mm TRAVEL, PRELOAD  
& MECHANICAL LOCKOUT

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO NEW-ALIVIO M430  
OCTALINK 48/36/26T\*170/175mm

BRAKES SHIMANO M422 V-BRAKES

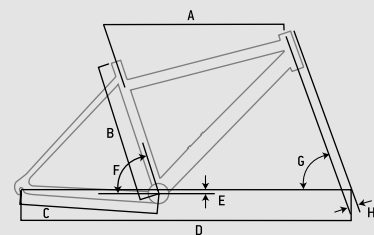

FRAME GEOMETRY CHART

FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

For frame geometry chart of Ladies and Wave version, refer to page 108

WHEEL 700C  
SPEED 24 or Nexus-8




FRAME AL7005-T4/T6 TREKKING,  
M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm

FORK RST NEON-PRO-T, 75mm TRAVEL, PRELOAD ADJUSTMENT

TRANSMISSION SHIMANO NEW-ALIVIO M430, SHIMANO M171  
48/38/28T\*170mm or Nexus-8

BRAKES SHIMANO M422 V-BRAKES

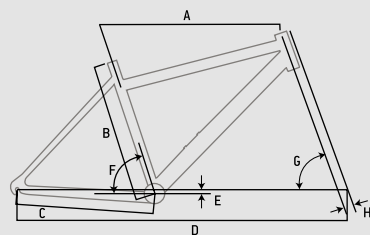

FRAME GEOMETRY CHART

FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45




FRAME AL6061-T4/T6 TREKKING, M:42/47/53/58cm,  
AL7005-T4/T6 TREKKING, L/W:40/46/53cm

FORK ZOOM BRAVO 30mm TRAVEL

TRANSMISSION SHIMANO TX35 or NEXUS-3sp

BRAKES MIRANDA ELEGANCE, COLD FORGED V-BRAKES

OPTION RIGID HI-TEN FORK

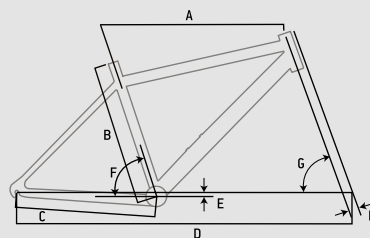

FRAME GEOMETRY CHART

FRAME SIZE	420	470	530	580
A TOP TUBE	575	581	589	596
B SEAT TUBE	420	470	530	580
C REAR CENTER	450	450	450	450
D WHEEL BASE	1071	1077	1087	1094
E B.B. DROP	55	55	55	55
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	71°	71°	71°	71°
H OFFSET	45	45	45	45



city bikes



64

TESTEK


WHEEL 26"  
SPEED 24

FRAME AL6061-T4/T6 COMFORT, M:42/47/53cm, L:42/47cm

FORK RST CAPA-T, PRELOAD, 80mm TRAVEL

TRANSMISSION SHIMANO ACERA M360, SHIMANO M171  
48/38/28T\*170mm

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

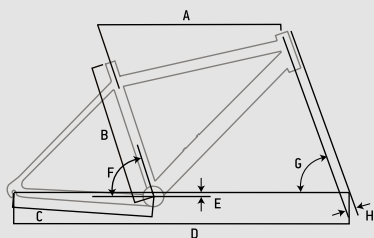

FRAME GEOMETRY CHART			
FRAME SIZE	420	470	530
A TOP TUBE	557	578	594
B SEAT TUBE	420	470	530
C REAR CENTER	435	435	435
D WHEEL BASE	1042	1064	1076
E B.B. DROP	46	46	46
F SEAT ANGLE	73°	73°	72°30'
G HEAD ANGLE	70°30'	70°30'	70°30'
H OFFSET	38	38	38

For frame geometry chart of Ladies version, refer to page 108

65

INNERCITY


WHEEL 700C  
SPEED Nexus-8  
or Nexus-3

FRAME AL7005-T4/T6 EASY-BOARD, 40/46/53cm

FORK RIGID ALLOY (NEXUS-8) or HI-TEN (NEXUS-3)

TRANSMISSION SHIMANO NEXUS 8sp or 3sp

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

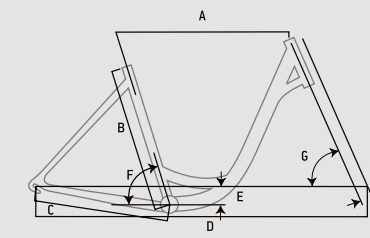

FRAME GEOMETRY CHART			
FRAME SIZE	400	460	530
A TOP TUBE	636	646	656
B SEAT TUBE	400	460	530
C REAR CENTER	470	470	470
D WHEEL BASE	1137	1147	1157
E B.B. DROP	65	65	65
F SEAT ANGLE	70°	70°	70°
G HEAD ANGLE	69°	69°	69°
H OFFSET	45	45	45

WHEEL 700C

SPEED 7 or Nexus-3 or Single Speed




FRAME AL6061-T4/T6 CITY-LOOP, 40/46/51cm

FORK RIGID HI-TEN

TRANSMISSION SHIMANO TX35 7sp or NEXUS-3sp or SS

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

COLOR OPTION SATIN ANTHRACITE

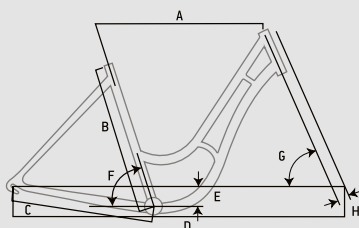

FRAME GEOMETRY CHART

FRAME SIZE	400	460	510
A TOP TUBE	602	607	612
B SEAT TUBE	400	460	510
C REAR CENTER	440	460	460
D WHEEL BASE	1100	1105	1110
E B.B. DROP	72	72	72
F SEAT ANGLE	72°30'	72°30'	72°30'
G HEAD ANGLE	70°	70°	70°
H OFFSET	38	38	38




FRAME AL6061-T4/T6 TREKKING, M:42/46/50/54/58cm

FORK RIGID HI-TEN FORK

TRANSMISSION SHIMANO TX35

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

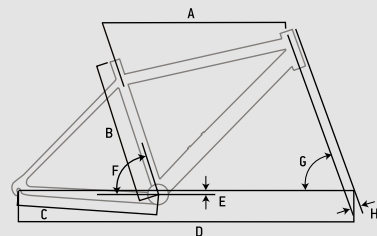


FRAME GEOMETRY CHART					
FRAME SIZE	420	460	500	540	580
A TOP TUBE	580	580	590	600	615
B SEAT TUBE	420	460	500	540	580
C REAR CENTER	440	440	440	440	440
D WHEEL BASE	1074	1074	1085	1095	1111
E B.B. DROP	50	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45	45

FRAME AL6061-T4/T6 TREKKING, W:40/46/53cm

FORK RIGID HI-TEN FORK

TRANSMISSION SHIMANO TX35

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

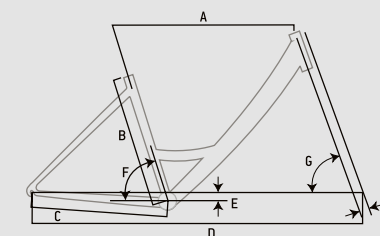

FRAME SIZE			
	400	460	530
A TOP TUBE	608	613	618
B SEAT TUBE	400	460	530
C REAR CENTER	460	460	460
D WHEEL BASE	1100	1105	1110
E B.B. DROP	50	50	50
F SEAT ANGLE	69°33'	69°33'	69°33'
G HEAD ANGLE	69°	69°	69°
H OFFSET	45	45	45

road bikes




FRAME	FORK	TRANSMISSION	BRAKES	WHEELS
UD-CARBON COMPACT RACING GEOMETRY 44/48/52/56cm	UD-CARBON	SHIMANO ULTEGRA	SHIMANO ULTEGRA 6700	SHIMANO RS30

# official team bike



Stage-Team is the Ideal road racer coupled with numerous teams and riders over the years. It started with the Delta name some 10 years ago, went through different development stages of frame materials & transmission technologies, and ended up being the carbon, compact, lightweight asphalt master of 2011.

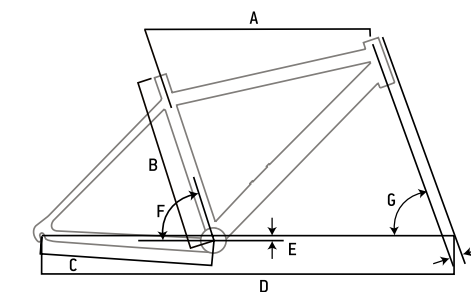

FRAME GEOMETRY CHART				
FRAME SIZE	440	480	520	560
A TOP TUBE	530	547	570	590
B SEAT TUBE	440	480	520	560
C REAR CENTER	408	408	408	408
D WHEEL BASE	976	985	999	1008
E B.B. DROP	68	68	68	68
F SEAT ANGLE	74°	73°30'	73°	72°30'
G HEAD ANGLE	72°	72°30'	73°	73°30'
H OFFSET	45	45	45	45


STAGE



WHEEL 700C SPEED 20



- FRAME UD-CARBON COMPACT RACING GEOMETRY 44/48/52/56cm
- FORK UD-CARBON W/ALLOY-STEERER, CROWN & DROPOUTS
- TRANSMISSION SHIMANO NEW-105 5700, SHIMANO NEW-105 5750 COMPACT DOUBLE 50/34T\*170/175mm HOLLOWTECH-II
- BRAKES SHIMANO NEW-105 5700 CALIPERS

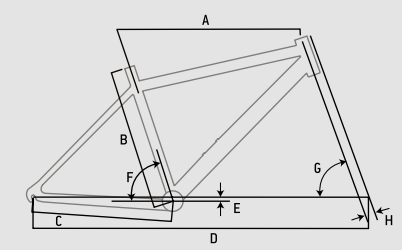

FRAME GEOMETRY CHART				
FRAME SIZE	440	480	520	560
A TOP TUBE	530	547	570	590
B SEAT TUBE	440	480	520	560
C REAR CENTER	408	408	408	408
D WHEEL BASE	976	985	999	1008
E B.B. DROP	68	68	68	68
F SEAT ANGLE	74°	73°30'	73°	72°30'
G HEAD ANGLE	72°	72°30'	73°	73°30'
H OFFSET	45	45	45	45

# 76

## ONROAD

WHEEL 700C  
SPEED 18



# //

## INTEMPO

WHEEL 700C  
SPEED 16




**FRAME** AL7005-T4/T6 BUTTED SUPER LIGHT COMPACT  
40/45/50/55/60cm

**FORK** UD-CARBON W/ALLOY STEERER, CROWN & DROPOUTS

**TRANSMISSION** SHIMANO TIAGRA 4500, SHIMANO SORA 3450 COMPACT  
DOUBLE 50/34T\*170/175mm

**BRAKES** SHIMANO SORA 3400 CALIPERS

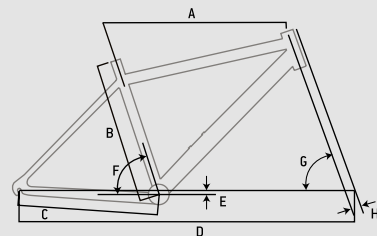


FRAME GEOMETRY CHART					
FRAME SIZE	400	450	500	550	600
A TOP TUBE	514	535	555	585	605
B SEAT TUBE	400	450	500	550	600
C REAR CENTER	405	405	405	405	405
D WHEEL BASE	975	976	983	999	1018
E B.B. DROP	69	69	69	69	69
F SEAT ANGLE	74°30'	74°	73°30'	73°	73°
G HEAD ANGLE	71°	72°	73°	74°	74°
H OFFSET	50	43	43	43	43

**FRAME** AL7005-T4/T6 BUTTED SUPER LIGHT COMPACT 40/45/50/55/60cm

**FORK** UD-CARBON W/ALLOY STEERER, CROWN & DROPOUTS

**TRANSMISSION** SHIMANO SORA 3400, SHIMANO 2350 COMPACT DOUBLE  
50/34T\*175mm

**BRAKES** PROMAX ALLOY FORGED CALIPERS

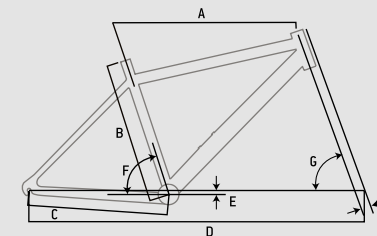

FRAME GEOMETRY CHART					
FRAME SIZE	400	450	500	550	600
A TOP TUBE	514	535	555	585	605
B SEAT TUBE	400	450	500	550	600
C REAR CENTER	405	405	405	405	405
D WHEEL BASE	975	976	983	999	1018
E B.B. DROP	69	69	69	69	69
F SEAT ANGLE	74°30'	74°	73°30'	73°	73°
G HEAD ANGLE	71°	72°	73°	74°	74°
H OFFSET	50	43	43	43	43



junior bikes



80

## AXION 24

WHEEL 24"  
SPEED 21

FRAME AL6061-T4/T6 D-TYPE ACTIVE SUSPENSION, 31cm

FORK ZOOM BRAVO, 40mm TRAVEL

TRANSMISSION SHIMANO TOURNEY TX35

BRAKES PROMAX MECHANICAL DISCS,  
MIRANDA ELEGANCE COLD FORGED V-BRAKES OPTION

81

## STROBE 24

WHEEL 24"  
SPEED 21

FRAME AL6061-T4/T6 HARDTAIL, 31cm

FORK ZOOM BRAVO, 40mm TRAVEL

TRANSMISSION SHIMANO TOURNEY TX35

BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES,  
F PROMAX MECHANICAL DISC BRAKE OPTION

82

STROBE 20

WHEEL 20"  
SPEED 6

FRAME AL6061-T4/T6 HARDTAIL, 28cm  
 FORK ZOOM BRAVO, 30mm TRAVEL  
 TRANSMISSION SHIMANO TOURNEY TY18  
 BRAKES MIRANDA ELEGANCE COLD FORGED V-BRAKES

83

V-TRACK  
12-14-16-18

FRAME HI-TEN D-TYPE, 21/21/23/25cm  
 FORK HI-TEN RIGID ATB  
 BRAKES APSE 1020S STEEL CALIPERS

freestyle  
bikes



86

X-TEN

WHEEL 20"  
SPEED 1



FRAME HI-TEN 28cm FREESTYLE W/CRMO SEAT TUBE  
FORK HI-TEN RIGID  
TRANSMISSION 3pc CRANK  
BRAKES ALLOY U-BRAKES

87

X-SIX

WHEEL 20"  
SPEED 1



FRAME HI-TEN 28cm FREESTYLE  
FORK HI-TEN RIGID  
TRANSMISSION 1pc CRANK  
BRAKES ALLOY U-BRAKES

mountain bikes

SPECS	RACE PRO team 26"-27sp	RACE PRO comp 26"-30sp	RACE PRO comp 26"-27sp
<b>FRAME</b>	UD-carbon hardtail 40/44/49/53cm	UD-carbon hardtail 41/46/51cm	UD-carbon hardtail 41/46/51cm
<b>FORK</b>	Magura Durin-Race-RCL 100mm	Rock Shox Recon-Silver-TK w/PopLoc	RST F1RST-Air-SRL, alloy crown, AL7050 steerer & 30mm uppers, magnesium lowers, air 100mm travel, rebound, compression, remote hydraulic-lockout
<b>HUB F+R</b>	Shimano XT M775 wheelset	Shimano MT15 wheelset	Shimano RM65 QR Center-Lock-disc
<b>RIMS</b>	Shimano XT M775 wheelset	Shimano MT15 wheelset	Exal DC-19 alloy, double wall, painted, disc
<b>SPOKES</b>	Shimano XT M775 wheelset	Shimano MT15 wheelset	Black 14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Schwalbe Nobby-Nic/Racing-Ralph Evolution 26*2.25	Michelin Country-Trail 26*2.00, F/V tubes	Michelin Country-Trail 26*2.00, F/V tubes
<b>CRANKSET</b>	Shimano XT 44/32/22T*170/175mm	Shimano new-10sp M552 42/32/24T*170/175mm	Shimano Deore M590 44/32/22T*170/175mm w/CG & BB-adapter
<b>FRONT DERAILLEUR</b>	Shimano XT	Shimano new-10sp SLX M661	Shimano new-Alivio M431
<b>REAR DERAILLEUR</b>	Shimano XT M772 shadow	Shimano new-10sp XT M773 shadow	Shimano XT M772 shadow
<b>SHIFTERS</b>	Shimano XT SL-M770	Shimano SLX SL-M660 3*10sp	Shimano Deore SL-M590 3*9sp
<b>CHAIN</b>	Shimano HG73	Shimano new-10sp HG74	Shimano super-narrow HG53
<b>CASSETTE SPROCKET</b>	Shimano 9sp HG80 11-13-15-17-20-23-26-30-34T	Shimano 10sp HG81 11-13-15-17-19-21-24-28-32-36T	Shimano 9sp HG50 11-13-15-17-20-23-26-30-34T
<b>BRAKES</b>	Shimano XT hydraulic discs M775 180/160mm	Shimano Deore M595 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors
<b>BRAKE LEVERS</b>	Shimano XT	Shimano Deore M595 hydraulic	Shimano M445 hydraulic
<b>HANDLEBAR</b>	Pro XCR carbon	Easton EA30 riser bar, 63,5cm wide, 20mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore
<b>HANDLESTEM</b>	Pro XCR carbon 90/120mm oversize	Easton EA30 90/105mm extension, 6o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore
<b>SEAT POST</b>	Pro XCR carbon	Easton EA30 2-bolt 31.6*350mm	Kalloy alloy forged w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, Selle Italia SLR-XP	Shimano gear outer cables, Selle Italia XR-XC-Flow	Shimano gear outer cables, Selle Italia XR-XC-Flow

SPECS	RACE PRO 26"-30sp	TRAXER 26"-30sp	BOOMMAX 26"-30sp
<b>FRAME</b>	AL7005-T4/T6 MTB-hardtail butted 41/46/51/56cm	AL7005-T4/T6 MTB-hardtail butted 41/46/51/56cm	AL7005-T4/T6 MTB-hardtail butted 41/46/51/56cm
<b>FORK</b>	Rock Shox Recon-Silver-TK w/PopLoc	RST F1RST-Air-SRL, alloy crown, AL7050 steerer & 30mm uppers, magnesium lowers, air 100mm travel, rebound, compression, remote hydraulic-lockout	RST Gila-Pro-RL, alloy crown & lowers, 30mm steel black uppers, preload & remote hydraulic-lockout, 100mm travel
<b>HUB F+R</b>	Shimano XT M775 QR Center-Lock-disc	Shimano Deore M595 QR Center-Lock-disc	Shimano RM65 QR Center-Lock-disc
<b>RIMS</b>	Exal DC-19 alloy, double wall, painted, disc	Exal DC-19 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Schwalbe F Nobby-Nic, R Racing-Ralph 26*2.25, F/V tubes	Michelin Country-Trail 26*2.00, F/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes
<b>CRANKSET</b>	Shimano new-10sp XT M770 42/32/24T*170/175mm	Shimano new-10sp M552 42/32/24T*170/175mm	Shimano new-10sp M552 42/32/24T*170/175mm
<b>FRONT DERAILLEUR</b>	Shimano new-10sp XT M770	Shimano new-10sp SLX M660	Shimano new-10sp SLX M660
<b>REAR DERAILLEUR</b>	Shimano new-10sp XT M773 shadow	Shimano new-10sp XT M773 shadow	Shimano new-10sp SLX M663 shadow
<b>SHIFTERS</b>	Shimano XT SL-M770 3*10sp	Shimano SLX SL-M660 3*10sp	Shimano SLX SL-M660 3*10sp
<b>CHAIN</b>	Shimano new-10sp HG74	Shimano new-10sp HG74	Shimano new-10sp HG74
<b>CASSETTE SPROCKET</b>	Shimano new-10sp XT M771 11-13-15-17-19-21-24-28-32-36T	Shimano new-10sp HG81 11-13-15-17-19-21-24-28-32-36T	Shimano new-10sp HG81 11-13-15-17-19-21-24-28-32-36T
<b>BRAKES</b>	Shimano XT M775 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano Deore M595 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors
<b>BRAKE LEVERS</b>	Shimano Deore M775 hydraulic	Shimano Deore M595 hydraulic	Shimano M445 hydraulic
<b>HANDLEBAR</b>	Easton EA30 riser bar, 63,5cm wide, 20mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore
<b>HANDLESTEM</b>	Easton EA30 90/105mm extension, 6o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore
<b>SEAT POST</b>	Easton EA30 2-bolt 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, Selle Italia XR-XC-Flow	Shimano gear outer cables, Selle Royal Seta, Wellgo light alloy pedals	Shimano gear outer cables, Selle Royal Seta

# mountain bikes

SPECS	HILLMASTER H-disc 26"-27sp	HILLMASTER M-disc 26"-27sp	ZIGZAG 26"-24sp
<b>FRAME</b>	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm
<b>FORK</b>	RST Gila-Pro-RL, alloy crown & lowers, 30mm steel black uppers, preload & remote hydraulic-lockout, 100mm travel	RST Gila-Pro-ML, alloy crown & lowers, 30mm steel black uppers, preload & mechanical lockout, 100mm travel	RST Gila-Pro-ML, alloy crown & lowers, 30mm steel black uppers, preload & mechanical-lockout, 100mm travel
<b>HUB F+R</b>	Shimano RM65 QR Center-Lock-disc	Shimano RM65 QR Center-Lock-disc	Shimano RM65 QR Center-Lock-disc
<b>RIMS</b>	X6 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes
<b>CRANKSET</b>	Shimano new-Alivio M430 octalink 44/32/22T*170/175mm w/CG	Shimano new-Alivio M430 octalink 44/32/22T*170/175mm w/CG	Shimano Acera M361 octalink 42/32/22T*170/175mm w/CG
<b>FRONT DERAILLEUR</b>	Shimano new-Alivio M430	Shimano new-Alivio M430	Shimano Altus M310
<b>REAR DERAILLEUR</b>	Shimano Deore M592 shadow	Shimano new-Alivio M430	Shimano new-Alivio M430
<b>SHIFTERS</b>	Shimano new-Alivio SL-M430 3*9sp	Shimano new-Alivio SL-M430 3*9sp	Shimano new-Altus SL-M310 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	Shimano super-narrow HG53	Shimano super-narrow HG53	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M416 mechanical disc brakes, center-lock 180/160mm rotors	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors
<b>BRAKE LEVERS</b>	Shimano M445 hydraulic	Shimano new-Alivio ST-430	Shimano M445 hydraulic
<b>HANDLEBAR</b>	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, Selle Royal Seta	Shimano gear outer cables, Selle Royal Seta	Shimano gear outer cables

SPECS	PRO RIDER disc 26"-24sp	PRO RIDER 26"-27sp	STROBE disc 26"-24sp
<b>FRAME</b>	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm
<b>FORK</b>	RST Gila-Pro-ML, alloy crown & lowers, 30mm steel black uppers, preload & mechanical-lockout, 100mm travel	RST Gila-Pro-ML, alloy crown & lowers, 30mm steel black uppers, preload & mechanical-lockout, 100mm travel	RST Capa-T, alloy crown & lowers, 25.4mm steel cp uppers, preload, 80mm travel
<b>HUB F+R</b>	Shimano RM65 QR Center-Lock-disc	Shimano RM60 QR	Shimano RM60 QR, Joytech alloy 6-bolt disc option
<b>RIMS</b>	X6 alloy, double wall, painted, disc	Exal ZX-19 alloy, double wall, painted, machined sidewalls, wear indicator	X6 alloy, double wall, painted, disc
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes
<b>CRANKSET</b>	Shimano M171 42/34/24T*170mm black w/CG	Shimano Acera M361 octalink 42/32/22T*170/175mm w/CG	Shimano M171 42/34/24T*170mm black w/CG
<b>FRONT DERAILLEUR</b>	Shimano M190	Shimano Altus M310	Shimano M190
<b>REAR DERAILLEUR</b>	Shimano new-Alivio M430	Shimano new-Alivio M430	Shimano Acera M360
<b>SHIFTERS</b>	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	KMC Z8	KMC Z8	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Shimano M416 mechanical disc brakes, center-lock 180/160mm rotors	Shimano M422 V-brakes	Promax mechanical discs option
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Zoom alloy, ahead, 90/110mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables	Shimano gear outer cables, stainless brake inner wires	Shimano gear outer cables, stainless brake inner wires, Shimano BB

## mountain bikes

SPECS	STROBE 26"-24sp	FREEDER disc 26"-21sp	FREEDER 26"-21sp
<b>FRAME</b>	AL7005-T4/T6 MTB-hardtail 38/41/46/51/56cm	AL6061-T4/T6 MTB-hardtail, M:38/41/46/51/56cm, L:38/41/46cm	AL6061-T4/T6 MTB-hardtail, M:38/41/46/51/56cm, L:38/41/46cm
<b>FORK</b>	RST Capa-T, alloy crown & lowers, 25.4mm steel cp uppers, preload, 80mm travel	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 50 mm travel	RST Capa-T, alloy crown & lowers, 25.4mm steel cp uppers, preload, 80mm travel
<b>HUB F+R</b>	Shimano RM60 QR, Joytech alloy 6-bolt disc option	Joytech disc alloy QR	Joytech alloy QR, F Shimano dynamo hub option
<b>RIMS</b>	Exal ZX-19 alloy, double wall, painted, machined sidewalls, wear indicator	X6 alloy, double wall, painted, disc	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples	Ucp w/brass nipples	Ucp w/brass nipples
<b>TIRES</b>	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Sport-Cruising 26*1.95, A/V tubes	Kenda Sport-Cruising 26*1.95, A/V tubes
<b>CRANKSET</b>	Shimano M171 42/34/24T*170mm black w/CG	Prowheel 42/34/24T*170mm, plastic coated crank, CG	Shimano M171 42/34/24T*170mm black w/CG
<b>FRONT DERAILLEUR</b>	Shimano M190	Shimano TX50	Shimano TX50
<b>REAR DERAILLEUR</b>	Shimano Acera M360	Shimano TX35	Shimano TX35
<b>SHIFTERS</b>	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*7sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	KMC Z8	KMC Z51	KMC Z51
<b>CASSETTE SPROCKET</b>	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano Tourney TZ21 7sp freewheel, 14-16-18-20-22-24-28T w/CP	Shimano Tourney TZ21 7sp freewheel, 14-16-18-20-22-24-28T w/CP
<b>BRAKES</b>	Miranda Elegance cold forged V-brakes	Promax mechanical discs	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 60 backsweep, 20mm rise, 25.4mm barbore	Zoom riser bar, 62cm wide, 60 backsweep, 20mm rise, 25.4mm barbore	Zoom riser bar, 62cm wide, 60 backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, ahead, 90/110mm extension, 25o rise	Zoom alloy, ahead, 90/110mm extension, 25o rise	Zoom alloy, ahead, 90/110mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Zoom alloy tube, 27.2*300mm	Zoom alloy tube, 27.2*300mm
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, Shimano BB	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand

## dirt bikes

SPECS	JUMP UP 26"-24sp	BUMP disc 26"-24sp	BUMP 26"-24sp
<b>FRAME</b>	AL7005 dirt-jump 38/42cm	AL7005 dirt-jump 38/42cm	AL7005 dirt-jump 38cm/42cm
<b>FORK</b>	RST Launch jump, alloy, IS disc, 130mm, P	RST Launch-T, alloy, IS disc, 130mm, P	RST Launch jump, alloy, IS disc, 130mm, P
<b>HUB F+R</b>	Shimano RM65 CL disc	Shimano RM65 CL disc	Shimano RM60
<b>RIMS</b>	Exal alloy double wall, disc, eyelets, wear indicator	Exal alloy double wall, disc, eyelets	Alloy double wall, disc, wear indicator
<b>SPOKES</b>	Sha-Dar stainless 18/8	Sha-Dar stainless 18/8	Sha-Dar stainless 18/8
<b>TIRES</b>	Kenda K-RAD 26*2.30	Kenda K-RAD 26*2.30	Kenda K-RAD 26*2.30
<b>CRANKSET</b>	Shimano Acera 42/32/22T*170mm w/CG	Shimano Acera M361 42/32/22T*170/175mm w/CG	Shimano Acera 42/32/22T*170mm w/CG
<b>FRONT DERAILLEUR</b>	Shimano Acera	Shimano Altus M310	Shimano Altus
<b>REAR DERAILLEUR</b>	Shimano new-Deore M592 shadow	Shimano Deore M531	Shimano Acera M360
<b>SHIFTERS</b>	Shimano easy-fire ST-EF50	Shimano easy-fire ST-EF50	Shimano easy-fire ST-EF50
<b>CHAIN</b>	KMC Z8	KMC Z8	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG50 8sp 11-28T	Shimano HG30 8sp 11-32T	Shimano HG30 8sp 11-32T
<b>BRAKES</b>	Shimano mechanical discs M416 180/160mm	Shimano mechanical discs M416 180/160mm	Shimano v-brakes
<b>BRAKE LEVERS</b>	Shimano easy-fire ST-EF50	Shimano easy-fire ST-EF50	Shimano easy-fire ST-EF50
<b>HANDLEBAR</b>	Alloy riser bar, 62cm wide, 20mm rise, oversize	Pro FRS Alloy 2014, Riser, 68cm wide, 31.8mm	Alloy riser bar, 62cm wide, 20mm rise, oversize
<b>HANDLESTEM</b>	Alloy ahead, 60mm extension, 10o rise, oversize	Pro FRS Alloy, 50mm/5D, 31.8mm	Alloy ahead, 60mm extension, 10o rise, oversize
<b>SEAT POST</b>	Alloy forged w/slider & scale	Zoom alloy candle type 300mm	Alloy w/slider & scale
<b>SPECIALS</b>	Velo freestyle/dirt saddle	Velo freestyle/dirt saddle	Velo freestyle/dirt saddle



## dual suspension bikes

SPECS	VSR pro 26"-27sp	VSR comp 26"-24sp	STROKE 26"-24sp
<b>FRAME</b>	AL7005-T4/T6 4-link suspension 40/44/49/53cm	AL7005-T4/T6 4-link suspension 40/44/49/53cm	AL7005-T4/T6 active-geometry suspension 42/47/52/57cm
<b>FORK</b>	RST Titan-Air-SRL, alloy crown, AL7050 steerer & 32mm uppers, magnesium lowers, air 100mm travel, oil rebound, compression, remote hydraulic-lockout	RST Gila-Pro-RL, alloy crown & lowers, 30mm steel black uppers, preload & remote hydraulic-lockout, 100mm travel	RST Capa-ML, alloy crown & lowers, 25.4mm steel cp uppers, preload & mechanical-lockout, 80mm travel
<b>REAR SHOCK</b>	RST Element, preload, rebound, lockout	Kind-Shock A5-RE air shock	Kind-Shock KS-260 coil spring w/6061-T6 forged alloy body, 850lbs/in, preload adjust
<b>HUB F+R</b>	Shimano RM65 QR Center-Lock-disc	Shimano RM65 QR Center-Lock-disc	Joytech alloy 6-bolt QR disc
<b>RIMS</b>	Exal DC-19 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Michelin Country-Trail 26*2.00, F/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes	Kenda Kadre 30tpi 26*2.10, A/V tubes
<b>CRANKSET</b>	Shimano Deore M590 44/32/22T*170/175mm w/CG & BB-adapter	Shimano Acera M361 octalink 42/32/22T*170/175mm w/CG	Shimano M171 42/34/24T*170mm black w/CG
<b>FRONT DERAILLEUR</b>	Shimano new-Alivio M431	Shimano Altus M311	Shimano Tourney TY10
<b>REAR DERAILLEUR</b>	Shimano XT M772 shadow	Shimano Deore M592 shadow	Shimano Acera M360
<b>SHIFTERS</b>	Shimano Deore SL-M590 3*9sp	Shimano new-Altus SL-M310 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	Shimano super-narrow HG53	KMC Z8	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG50 9sp 11-13-15-17-20-23-26-30-34T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors	Promax mechanical discs
<b>BRAKE LEVERS</b>	Shimano M445 hydraulic	Shimano M445 hydraulic	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Easton EA30 riser bar, 63,5cm wide, 20mm rise, 31.8mm barbore	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Easton EA30 90/105mm extension, 6o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Zoom alloy, ahead, 90/110mm extension, 25o rise
<b>SEAT POST</b>	Easton EA30 2-bolt 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, Selle Royal Seta	Shimano gear outer cables, Selle Royal Seta, Wellgo light alloy pedals	Shimano gear outer cables, stainless brake inner wires, Shimano BB

SPECS	AXION 26"-24sp
<b>FRAME</b>	AL7005-T4/T6 active-geometry suspension 42/47/52/57cm
<b>FORK</b>	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 50 mm travel
<b>REAR SHOCK</b>	Kind-Shock KS-260 coil spring w/6061-T6 forged alloy body, 850lbs/in, preload adjust
<b>HUB F+R</b>	Shimano RM60 QR
<b>RIMS</b>	Exal ZX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kadre 30tpi 26*2.10, A/V tubes
<b>CRANKSET</b>	Shimano M171 42/34/24T*170mm black w/CG
<b>FRONT DERAILLEUR</b>	Shimano Tourney TY10
<b>REAR DERAILLEUR</b>	Shimano Acera M360
<b>SHIFTERS</b>	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, ahead, 90/110mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, Shimano BB

SPECS	INTEGRATOR 700C-27sp	ERGOMAX disc 700C-24sp	ERGOMAX 700C-27sp
<b>FRAME</b>	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm
<b>FORK</b>	RST Vogue-Air-Pro-SRL, alloy crown, AL7050 steerer & 28.6mm uppers, magnesium lowers, air 75mm travel, oil rebound, compression, remote hydraulic-lockout	RST Neon-Pro-ML, alloy crown & lowers, 28.6mm steel black uppers, 75mm travel, preload & me- chanical lockout	RST Neon-Pro-ML, alloy crown & lowers, 28.6mm steel black uppers, 75mm travel, preload & me- chanical lockout
<b>HUB F+R</b>	Shimano RM65 QR Center-Lock-disc	Shimano RM65 QR Center-Lock-disc	Shimano RM60 QR
<b>RIMS</b>	X6 alloy, double wall, painted, disc	X6 alloy, double wall, painted, disc	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples	Black 14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Michelin Trans-World-Sprint 37-622 w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes
<b>CRANKSET</b>	Shimano new-Alivio M430 octalink 48/36/26T*170/175mm w/CG	Shimano Acera M361 octalink 48/38/28T*170/175mm w/CG	Shimano new-Alivio M430 octalink 48/36/26T*170/175mm w/CG
<b>FRONT DERAILLEUR</b>	Shimano new-Alivio M430	Shimano Altus M310	Shimano new-Alivio M431
<b>REAR DERAILLEUR</b>	Shimano Deore M592 shadow	Shimano new-Alivio M430	Shimano new-Alivio M430
<b>SHIFTERS</b>	Shimano new-Alivio SL-M430 3*9sp	Shimano new-Altus SL-M310 3*8sp easy-fire thumb-shifters	Shimano new-Alivio ST-M430 3*9sp
<b>CHAIN</b>	Shimano super-narrow HG53	KMC Z8	Shimano super-narrow HG53
<b>CASSETTE SPROCKET</b>	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T
<b>BRAKES</b>	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M445 hydraulic disc brakes, center-lock 180/160mm rotors	Shimano M422 V-brakes
<b>BRAKE LEVERS</b>	Shimano M445 hydraulic	Shimano M445 hydraulic	Shimano new-Alivio ST-M430
<b>HANDLEBAR</b>	Easton EA30 riser bar, 63,5cm wide, 20mm rise, 31.8mm barbare	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbare	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbare
<b>HANDLESTEM</b>	Easton EA30 90/105mm extension, 6o rise, 31.8mm barbare	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbare	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbare
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear outer cables, Shimano octalink BB, Selle Royal Seta	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips	Shimano gear outer cables, stainless brake inner wires, Shimano octalink BB, ergonomic grips

SPECS	MEGISTO disc 700C-24sp	MEGISTO 700C-24sp	CROSSMO 700C-24sp
<b>FRAME</b>	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL6061-T4/T6 cross-trekking, M:42/47/53/58cm, L:40/46/53cm
<b>FORK</b>	RST Neon-Pro-T, alloy crown & lowers, 28.6mm steel black uppers, coil 75mm travel, preload adjustment	RST Neon-Pro-T, alloy crown & lowers, 28.6mm steel black uppers, coil 75mm travel, preload adjustment	RST 777-T, alloy crown, steel lowers, 25.4mm steel cp uppers, coil 50mm travel, preload adjustment
<b>HUB F+R</b>	Shimano RM65 QR Center-Lock-disc	Shimano RM60 QR	Shimano RM60 QR
<b>RIMS</b>	X6 alloy, double wall, painted, disc	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes
<b>CRANKSET</b>	Shimano M171 48/38/28T*170mm w/CG	Shimano M171 48/38/28T*170mm w/CG	Shimano M131 48/38/28T*170mm w/CG
<b>FRONT DERAILLEUR</b>	Shimano M191	Shimano M191	Shimano M191
<b>REAR DERAILLEUR</b>	Shimano Acera M360	Shimano new-Alivio M430	Shimano Acera M360
<b>SHIFTERS</b>	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	KMC Z8	KMC Z8	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T	Shimano HG30 8sp cassette 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Shimano M416 mechanical disc brakes, center-lock 160mm rotors	Shimano M422 V-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbare	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbare	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbare
<b>HANDLESTEM</b>	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 27.2*350mm
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips, kickstand	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips, kickstand	Shimano gear outer cables, stainless brake inner wires, Shimano BB, kickstand

## trekking off road

SPECS	NERGETIC 700C-21sp
<b>FRAME</b>	AL6061-T4/T6 cross-trekking, M:42/47/53/58cm, L:40/46/53cm
<b>FORK</b>	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 30 mm travel
<b>HUB F+R</b>	Joytech alloy QR
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kwick Sport-Cruising 700*35C, A/V tubes
<b>CRANKSET</b>	Prowheel 48/38/28T*170mm, plastic coated crank, CG
<b>FRONT DERAILLEUR</b>	Shimano TX51
<b>REAR DERAILLEUR</b>	Shimano TX35
<b>SHIFTERS</b>	Shimano Tourney SL-RS35 3*7sp revoshifters
<b>CHAIN</b>	KMC Z51
<b>CASSETTE SPROCKET</b>	Shimano Tourney TZ21 7sp freewheel 14-16-18-20-22-24-28T w/CP
<b>BRAKES</b>	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Tektro alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, threaded, non-adjustable, open, 15cm quill, 80/100mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 27.2*350mm
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand

## urban

SPECS	CHICANE 700C-27sp	CITYRUN 700C-24sp	INDIGO 700C-21sp
<b>FRAME</b>	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm
<b>FORK</b>	RST Single-Shock-M7-T head-shock, AL7050 steerer, magnesium lowers, nano-bearing, coil w/bumper, 40mm travel, preload adjustment	Rigid alloy trekking fork	Rigid hi-ten fork
<b>HUB F+R</b>	Shimano Deore M590 QR	Shimano RM60 QR	Joytech alloy QR
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	Black 14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Michelin City 32-622 w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C w/reflective tape, A/V tubes	Kenda Kwick Sport-Cruising 700*35C, A/V tubes
<b>CRANKSET</b>	Shimano Deore M590 48/36/26T*170/175mm w/CG & BB-adapter	Shimano M171 48/38/28T*170mm w/CG	Prowheel 48/38/28T*170mm, plastic coated crank, CG
<b>FRONT DERAILLEUR</b>	Shimano Deore M590	Shimano Altus M310	Shimano TX51
<b>REAR DERAILLEUR</b>	Shimano Deore M592 shadow	Shimano new-Alivio M430	Shimano Acera M360
<b>SHIFTERS</b>	Shimano Deore SL-M590 3*9sp easy-fire thumb-shifters	Shimano new-Altus SL-M310 3*8sp easy-fire thumb-shifters	Shimano ST-EF51 3*7sp easy-fire thumb-shifters
<b>CHAIN</b>	Shimano super-narrow HG53	KMC Z8	KMC Z51
<b>CASSETTE SPROCKET</b>	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 8sp 11-13-15-18-21-24-28-32T	Shimano Tourney TZ21 7sp freewheel 14-16-18-20-22-24-28T w/CP
<b>BRAKES</b>	Shimano Deore M590 V-brakes	Miranda Elegance cold forged V-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano Deore M590 alloy	Tektro alloy	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise	Zoom alloy, threaded, non-adjustable, open, 15cm quill, 80/100mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm	Kalloy alloy w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear & brake outer casing & inner cables, Selle Royal Seta	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand

# sport touring

SPECS	FUTOUR 700C-27sp	MULTIGO 700C-27sp	TRAVELON 700C-24sp
<b>FRAME</b>	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm
<b>FORK</b>	RST Single-Shock-M7-T head-shock, AL7050 steerer, magnesium lowers, nano-bearing, coil w/bumper, 40mm travel, preload adjustment	RST Neon-Pro-ML, alloy crown & lowers, 28.6mm steel black uppers, 75mm travel, preload & mechanical lockout	RST Neon-Pro-T, alloy crown & lowers, 28.6mm steel black uppers, coil 75mm travel, preload adjustment
<b>HUB F+R</b>	Shimano F dynamo-hub QR, R Deore M590 QR	Shimano F dynamo-hub nut, R RM60 QR	Shimano F dynamo-hub nut, R RM60 QR
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Schwalbe Marathon Supreme 700*40C w/reflective tape, D/V tubes	Michelin Trans-World-Sprint 37-622 w/reflective tape, D/V tubes	Kenda Eurotrek Sport-Cruising 700*42C w/reflective tape, D/V tubes
<b>CRANKSET</b>	Shimano Deore M590 octalink 48/36/26T*170/175mm w/CG & BB-adapter	Shimano new-Alivio M430 octalink 48/36/26T*170/175mm w/CG	Shimano M171 48/38/28T*170mm
<b>FRONT DERAILLEUR</b>	Shimano Deore M590	Shimano new-Alivio M430	Shimano M191
<b>REAR DERAILLEUR</b>	Shimano Deore M592 shadow	Shimano new-Alivio M430	Shimano new-Alivio M430
<b>SHIFTERS</b>	Shimano Deore SL-M590 3*9sp	Shimano new-Alivio ST-M430 3*9sp	Shimano ST-EF51 3*8sp easy-fire thumb-shifters
<b>CHAIN</b>	Shimano super-narrow HG53	Shimano super-narrow HG53	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 9sp 11-12-14-16-18-21-24-28-32T	Shimano HG30 8sp 11-13-15-18-21-24-28-32T
<b>BRAKES</b>	Shimano Deore M590 V-brakes	Shimano M422 V-brakes	Shimano M422 V-brakes
<b>BRAKE LEVERS</b>	Shimano Deore BL-M591	Shimano new-Alivio ST-M430	Shimano ST-EF51 alloy
<b>HANDLEBAR</b>	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore; Zoom moon-cruiser-style 60cm wide, 25.4mm barbore for W	Kalloy riser bar, 64cm wide, 5o bend, 15mm rise, 31.8mm barbore; Zoom moon-cruiser-style 60cm wide, 25.4mm barbore for W	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore; Zoom moon-cruiser-style 60cm wide for W
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore; Zoom alloy, ahead, 90/110mm extension, 25o rise, 25.4mm barbore for W	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore; Zoom alloy, ahead, 90/110mm extension, 25o rise, 25.4mm barbore for W	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise
<b>SEAT POST</b>	Kalloy alloy w/slider 350mm	Kalloy alloy w/slider 350mm	Kalloy alloy w/slider 350mm
<b>SPECIALS</b>	Shimano gear outer cables, Selle Bassano 3-Zone-Comfort-Plus, rear kickstand, alloy carrier, 10lux LED F & standlight LED R	Shimano gear outer cables, Shimano octalink BB, Selle Bassano 3-Zone-Comfort-Plus, rear kickstand, alloy carrier, 10lux LED F & standlight LED R	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips, rear kickstand, alloy carrier, 10lux LED F & standlight LED R



SPECS	TRAVELON 700C-Nexus-8	EZIGO 700C-21sp	EZIGO 700C-Nexus-3
<b>FRAME</b>	AL7005-T4/T6 cross-trekking, M:42/46/50/54/58cm, L:40/44/48/52cm, W:40/46/53cm	AL6061-T4/T6 cross-trekking for M/L, AL7005-T4/T6 for W, M: 42/47/53/58cm, L/W: 40/46/53cm	AL6061-T4/T6 trekking, M-42/47/53/58cm, L-40/46/53cm, W-40/46/53cm
<b>FORK</b>	RST Neon-Pro-T, alloy crown & lowers, 28.6mm steel black uppers, coil 75mm travel, preload adjustment	Steel suspension, alloy crown, 50mm travel	Rigid hi-ten city fork
<b>HUB F+R</b>	Shimano F dynamo-hub nut, R Nexus-8 sp	F: Shimano 3N20 DH; R: Joytech alloy	Shimano F dynamo-hub nut, R Nexus 3sp
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples	Sha-Dar stainless 18/8	14G black w/brass nipples
<b>TIRES</b>	Kenda Eurotrek Sport-Cruising 700*42C w/reflective tape, D/V tubes	Kenda Khan 700*38C RT, D/V tubes	Kenda Eurotrek Sport-Cruising 700*42C w/reflective tape, D/V tubes
<b>CRANKSET</b>	Prowheel 38T*170mm, alloy forged crank	Shimano M191 48/38/28T*170mm	Prowheel 38T*170mm, alloy forged crank
<b>FRONT DERAILLEUR</b>	-	Shimano C-051	-
<b>REAR DERAILLEUR</b>	-	Shimano Altus	-
<b>SHIFTERS</b>	Shimano Nexus 8sp revoshifter	Shimano RS35 revoshifter	Shimano Nexus 3sp revoshifter
<b>CHAIN</b>	KMC HV410	KMC Z51	KMC HV410
<b>CASSETTE SPROCKET</b>	Shimano Nexus 19T	Shimano MF-TZ21 7sp 14-16-18-20-22-24-28T	Shimano Nexus 19T
<b>BRAKES</b>	Shimano M422 V-brakes	Shimano M422 v-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Tektro alloy	Shimano ST-EF50	Tektro alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore; Zoom moon-cruiser-style 60cm wide for W	Zoom alloy riser bar, 62cm wide, 30mm rise	Zoom riser bar, 62cm wide, 6o backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, ahead adjustable, open, 100/120mm extension, 0-50o rise	Zoom HS-C82 alloy threaded, 80/100mm, 25o	Zoom alloy, threaded, non-adjustable, open, 15cm quill, 80/100mm extension, 25o rise
<b>SEAT POST</b>	Kalloy alloy w/slider 350mm	Zoom alloy clamp w/QR	Zoom alloy clamp w/QR
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips, rear kickstand, alloy carrier, 10lux LED F & standlight LED R	Steel carrier, kickstand, 10lux F light, R standlight	Stainless brake inner wires, cartridge BB, chain-case, kickstand, carrier, lighting set, SKS fenders

SPECS	TESTEK 700C-24sp	INNERCITY 700C-Nexus-8	INNERCITY 700C-Nexus-3
<b>FRAME</b>	AL6061-T4/T6 comfort, M:42/47/53cm, L:42/47cm	AL7005-T4/T6 easy-board, L:40/46/53cm	AL7005-T4/T6 easy-board, L:40/46/53cm
<b>FORK</b>	RST Capa-T, alloy crown & lowers, 25.4mm steel cp uppers, preload, 80mm travel	Rigid alloy trekking fork	Rigid hi-ten city fork
<b>HUB F+R</b>	Shimano F dynamo-hub nut, R RM60 QR	Shimano F dynamo-hub nut, R Nexus 8sp	Shimano F dynamo-hub nut, R Nexus 3sp
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kwick Sport-Cruising 26*1.75, A/V tubes	Kenda Eurotrek Sport-Cruising 700*42C, D/V tubes	Kenda Eurotrek Sport-Cruising 700*42C, D/V tubes
<b>CRANKSET</b>	Shimano M171 48/38/28T*170mm black w/CG	Prowheel 38T*170mm, alloy forged crank	Prowheel 38T*170mm, alloy forged crank
<b>FRONT DERAILLEUR</b>	Shimano M191	-	-
<b>REAR DERAILLEUR</b>	Shimano Acera M360	Shimano Nexus 8sp	Shimano Nexus 3sp
<b>SHIFTERS</b>	Shimano ST-EF51 3*8sp easy-fire thumb-shifters	Shimano Nexus-8 revoshifter	Shimano Nexus-3 revoshifter
<b>CHAIN</b>	KMC Z8	KMC HV410	KMC HV410
<b>CASSETTE SPROCKET</b>	Shimano HG30 8sp  11-13-15-18-21-24-28-32T	Shimano Nexus 19T	Shimano Nexus 19T
<b>BRAKES</b>	Miranda Elegance cold forged V-brakes	Miranda Elegance cold forged V-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy	Tektro alloy	Tektro alloy
<b>HANDLEBAR</b>	Zoom riser bar, 62cm wide, 6o backsweep,  20mm rise, 25.4mm barbore	Zoom riser bar, 62cm wide, 6o backsweep,  20mm rise, 25.4mm barbore	Zoom riser bar, 62cm wide, 6o backsweep,  20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy threaded open adjustable, 90/110mm extension, 0 to 50o rise, 15cm quill	Zoom alloy, threaded adjustable, open, 90/110mm extension, 0-50o rise	Zoom alloy, threaded adjustable, open, 90/110mm extension, 0-50o rise
<b>SEAT POST</b>	Zoom alloy suspension 27.2*300mm, 40mm travel	Zoom alloy tube 300mm	Zoom alloy tube 300mm
<b>SPECIALS</b>	SKS mudguards, alloy carrier, Atran kickstand,  Basta head-lamp, Goerner LED carrier standlight	Shimano gear outer cables, stainless brake inner wires, Shimano BB, ergonomic grips, kickstand, alloy carrier, 10lux LED F & standlight LED R	Stainless brake inner wires, cartridge BB, chain- case, kickstand, carrier, lighting set, SKS fenders

SPECS	CITYLIFE 700C-7sp or Nexus-3 or SS	UNIGO 700C-7sp
<b>FRAME</b>	AL6061-T4/T6 city-loop, L:40/46/51cm	AL7005-T4/T6 cross-trekking,  M:42/46/50/54/58cm, L:40/44/48/52cm,  W:40/46/53cm
<b>FORK</b>	Rigid hi-ten city fork	Rigid hi-ten city fork
<b>HUB F+R</b>	Joytech alloy w/dome nuts	Joytech alloy w/dome nuts
<b>RIMS</b>	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator	Exal TX-19 alloy, double wall, painted, machined sidewalls, wear indicator
<b>SPOKES</b>	14G ucp w/brass nipples	Ucp w/brass nipples
<b>TIRES</b>	Kenda Eurotrek Sport-Cruising 700*42C, D/V tubes	Kenda Eurotrek Sport-Cruising 700*42C, A/V tubes
<b>CRANKSET</b>	Prowheel 38T*170mm, alloy forged crank	Prowheel 38T*170mm, alloy forged crank
<b>FRONT DERAILLEUR</b>	Shimano TX35	Shimano TX35
<b>REAR DERAILLEUR</b>	Shimano Tourney SL-RS35 7sp	Shimano Tourney SL-RS35 7sp
<b>SHIFTERS</b>	Shimano revoshifter	Shimano revoshifter
<b>CHAIN</b>	KMC Z50 or HV410	KMC Z50
<b>CASSETTE SPROCKET</b>	Shimano Tourney TZ21 7sp freewheel  14-16-18-20-22-24-28T w/CP or 18T	Shimano Tourney TZ21 7sp freewheel  14-16-18-20-22-24-28T w/CP
<b>BRAKES</b>	Miranda Elegance cold forged V-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Tektro alloy	Tektro alloy
<b>HANDLEBAR</b>	Zoom moon-cruiser-style city bar, 60cm wide,  50o backsweep, 110mm curve, 25.4mm barbore	Zoom moon-cruiser-style city bar, 60cm wide,  50o backsweep, 110mm curve, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, threaded adjustable, open, 90/110mm extension, 0-50o rise	Zoom alloy, threaded adjustable, open,  90/110mm extension, 0-50o rise
<b>SEAT POST</b>	Zoom alloy tube 300mm	Kalloy alloy w/slider 350mm
<b>SPECIALS</b>	Stainless brake inner wires, cartridge BB, chaincase, kickstand, carrier, SKS fenders, wheel dynamo lighting set	Shimano gear outer cables, stainless brake in- ner wires, cartridge BB, kickstand, steel carrier, chaincase
<b>OPTIONS</b>	Shimano Nexus-3 & Single Speed versions available	

SPECS	STAGE team 700C-20sp	STAGE 700C-20sp	ONROAD 700C-18sp
<b>FRAME</b>	UD-carbon compact-geometry 44/48/52/56cm	UD-carbon compact-geometry 44/48/52/56cm	AL7005-T4/T6 butted-super-light compact-geometry 40/45/50/55/60cm
<b>FORK</b>	UD-carbon w/alloy-steerer+crown+dropouts	UD-carbon w/alloy-steerer+crown+dropouts	UD-carbon w/alloy-steerer+crown+dropouts
<b>HUB F+R</b>	Shimano RS30 wheelset	Shimano RS10 wheelset	Shimano R500 wheelset
<b>RIMS</b>	Shimano RS30 wheelset	Shimano RS10 wheelset	Shimano R500 wheelset
<b>SPOKES</b>	Shimano RS30 wheelset	Shimano RS10 wheelset	Shimano R500 wheelset
<b>TIRES</b>	Michelin Orium 700*23C, F/V super light tubes	Michelin Orium 700*23C, F/V super light tubes	Kenda Kampaign 700*23C 30tpi skinwall 110psi, F/V super light tubes
<b>CRANKSET</b>	Shimano Ultegra 6750 compact double 50/34T*170/175mm Hollowtech-II w/BB adapter	Shimano new-105 5750 compact double 50/34T*170/175mm Hollowtech-II w/BB adapter	Shimano Sora 3450 compact double 50/34T*170/175mm w/BB adapter
<b>FRONT DERAILLEUR</b>	Shimano Ultegra 6700	Shimano new-105 5700	Shimano Sora 3400
<b>REAR DERAILLEUR</b>	Shimano Ultegra 6700	Shimano new-105 5700	Shimano Tiagra 4500
<b>SHIFTERS</b>	Shimano Ultegra 6700 STi 2*10sp	Shimano new-105 5700 STi 2*10sp	Shimano Sora 3400 STi 2*9sp
<b>CHAIN</b>	Shimano Ultegra 6700 10sp	Shimano new-105 5700 10sp	Shimano super-narrow HG53
<b>CASSETTE SPROCKET</b>	Shimano Ultegra 6700 10sp 12-13-14-15-16-17-19-21-23-25T	Shimano new-105 5700 10sp 12-13-14-15-16-17-19-21-23-25T	Shimano HG50 9sp 12-13-14-15-17-19-21-23-25T
<b>BRAKES</b>	Shimano Ultegra 6700 calipers	Shimano new-105 5700 calipers	Shimano Sora 3400 calipers
<b>BRAKE LEVERS</b>	Shimano Ultegra 6700 STi	Shimano new-105 5700 STi	Shimano Sora 3400 STi
<b>HANDLEBAR</b>	Kalloy drop-bar 400/420/440mm wide, 131mm drop, 84mm reach, 31.8mm barbore	Kalloy drop-bar 400/420/440mm wide, 131mm drop, 84mm reach, 31.8mm barbore	Kalloy drop-bar 400/420/440mm wide, 131mm drop, 84mm reach, 31.8mm barbore
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore
<b>SEAT POST</b>	Kalloy alloy forged w/slider, 31.6*350mm	Kalloy alloy forged w/slider, 31.6*350mm	Kalloy alloy forged w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear & brake outer cables & inner wires, fi'zi:k Pave	Shimano gear & brake outer cables & inner wires, fi'zi:k Pave	Shimano gear & brake outer cables & inner wires


SPECS	INTEMPO 700C-16sp
<b>FRAME</b>	AL7005-T4/T6 butted-super-light compact-geometry 40/45/50/55/60cm
<b>FORK</b>	UD-carbon w/alloy-steerer+crown+dropouts
<b>HUB F+R</b>	Shimano 2200 QR
<b>RIMS</b>	Exal XR-3 alloy, double wall, painted, machined sidewalls, high-profile
<b>SPOKES</b>	14G stainless-18/8 w/brass nipples
<b>TIRES</b>	Kenda Kampaign 700*23C 30tpi skinwall 110psi, F/V super light tubes
<b>CRANKSET</b>	Shimano 2350 compact double 50/34T*175mm
<b>FRONT DERAILLEUR</b>	Shimano 2300 brazed-on w/clamp
<b>REAR DERAILLEUR</b>	Shimano Sora 3400
<b>SHIFTERS</b>	Shimano 2300 STi 2*8sp
<b>CHAIN</b>	KMC Z8
<b>CASSETTE SPROCKET</b>	Shimano HG50 8sp 12-13-15-17-19-21-23-25T
<b>BRAKES</b>	Promax alloy forged calipers
<b>BRAKE LEVERS</b>	Shimano 2300 STi
<b>HANDLEBAR</b>	Kalloy drop-bar 400/420/440mm wide, 131mm drop, 84mm reach, 31.8mm barbore
<b>HANDLESTEM</b>	Kalloy alloy, ahead, 90/105mm extension, 7o rise, 31.8mm barbore
<b>SEAT POST</b>	Kalloy alloy forged w/slider, 31.6*350mm
<b>SPECIALS</b>	Shimano gear & brake outer cables & inner wires

SPECS	AXION 24"-21sp Disc or V-brake	STROBE 24"-21sp Disc or V-brake	STROBE 20"-6sp
<b>FRAME</b>	AL6061-T4/T6 D-type active suspension, 31cm	AL6061-T4/T6 hardtail, 31cm	AL6061-T4/T6 hardtail, 28cm
<b>FORK</b>	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 40 mm travel	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 40 mm travel	Zoom Bravo, all hi-ten, 25.4mm CP stanchions, 30 mm travel
<b>REAR SHOCK</b>	Coil spring w/alloy body, preload adjust, 500lbs/in	-	-
<b>HUB F+R</b>	Joytech disc alloy QR	Joytech alloy, F disc QR, R w/dome nuts	Joytech alloy w/dome nuts
<b>RIMS</b>	alloy, double wall, painted, machined sidewalls, wear indicator	alloy, double wall, painted, machined sidewalls, wear indicator	alloy, single wall, natural, wear indicator
<b>SPOKES</b>	Ucp w/brass nipples	Ucp w/brass nipples	Ucp w/brass nipples
<b>TIRES</b>	Kenda Sport 24*1.95, A/V tubes	Kenda Sport 24*1.95, A/V tubes	Kenda Sport 20*2.00, A/V tubes
<b>CRANKSET</b>	Prowheel 42/34/24T*152mm, plastic coated crank, CG	Prowheel 42/34/24T*152mm, plastic coated crank, CG	Prowheel 36T*140mm, plastic coated crank, double CG
<b>FRONT DERAILLEUR</b>	Shimano Tourney TY10	Shimano Tourney TY10	-
<b>REAR DERAILLEUR</b>	Shimano Tourney TX35	Shimano Tourney TX35	Shimano Tourney TY18
<b>SHIFTERS</b>	Shimano ST-EF51 3*7sp easy-fire thumb-shifters	Shimano Tourney SL-RS35 3*7sp revoshifters	Shimano Tourney SL-RS35 6sp revoshifter
<b>CHAIN</b>	KMC Z51	KMC Z51	KMC Z30
<b>CASSETTE SPROCKET</b>	Shimano Tourney TZ21 7sp freewheel 14-16-18-20-22-24-28T w/CP	Shimano Tourney TZ21 7sp freewheel 14-16-18-20-22-24-28T w/CP	Shimano Tourney TZ20 6sp freewheel 14-16-18-21-24-28T w/CP
<b>BRAKES</b>	Promax mechanical discs	F Promax mechanical disc, R Miranda Elegance cold forged V-brakes	Miranda Elegance cold forged V-brakes
<b>BRAKE LEVERS</b>	Shimano ST-EF51 alloy	Tektro alloy junior	Tektro alloy junior
<b>HANDLEBAR</b>	Zoom riser bar, 56cm wide, 60 backsweep, 20mm rise, 25.4mm barbore	Zoom riser bar, 56cm wide, 60 backsweep, 20mm rise, 25.4mm barbore	Zoom riser bar, 54cm wide, 60 backsweep, 20mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, ahead, 90mm extension, 25o rise	Zoom alloy, ahead, 90mm extension, 25o rise	Zoom alloy, threaded, non-adjustable, alloy clamp, steel 15cm quill, 40mm extension, 22.2mm steerer, 30o rise
<b>SEAT POST</b>	Zoom alloy tube, 27.2*300mm	Zoom alloy tube, 27.2*300mm	Zoom alloy tube, 27.2*300mm
<b>SPECIALS</b>	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand	Shimano gear outer cables, stainless brake inner wires, cartridge BB, kickstand
<b>OPTIONS</b>	V-brakes (F&R) version available	V-brakes (F&R) version available	

SPECS	V-TRACK 18-16-14-12	X-TEN 20"-1sp	X-SIX 20"-1sp
<b>FRAME</b>	Hi-ten D-type, 21/21/23/25cm	Hi-ten/Crmo, 28cm freestyle	Hi-ten 28cm freestyle
<b>FORK</b>	Hi-ten rigid ATB	Hi-ten rigid	Hi-ten rigid
<b>HUB F+R</b>	Joytech steel w/dome nuts	Joytech alloy w/large flange	Joytech alloy w/large flange
<b>RIMS</b>	Alloy, single wall, natural	Alloy, single wall, painted	Alloy, single wall, painted
<b>SPOKES</b>	Ucp w/brass nipples	Ucp w/brass nipples	Ucp w/brass nipples
<b>TIRES</b>	Kenda Sport 12-1/2*2-1/4/14*2.125/16*2.125, A/V tubes	Kenda Kontakt 30tpi skinwall 20*2.25/1.95, A/V tubes	Kenda Kontakt 30tpi skinwall 20*2.25/1.95, A/V tubes
<b>CRANKSET</b>	Chuan-Wei 1/2" * 1/8" * 28/28/32/32T steel ring w/89/102/114/127mm cp OPC	3 pcs, Chuan-Wei 1/2" * 1/8" * 36T steel ring	1 pc, Chuan-Wei 1/2" * 1/8" * 36T steel ring w/165mm edb OPC
<b>CHAIN</b>	KMC HV410	KMC HV410	KMC HV410
<b>CASSETTE SPROCKET</b>	16T full ball	14T full ball	14T full ball
<b>BRAKES</b>	APSE 1020S steel calipers F & R	Chang-Star alloy U-brakes w/60mm pads	Chang-Star alloy U-brakes w/60mm pads
<b>BRAKE LEVERS</b>	Saccon plastic junior	Chang-Star alloy 2F	Chang-Star alloy 2F
<b>HANDLEBAR</b>	Zoom riser bar, 45cm wide, 60 backsweep, 20mm rise, 25.4mm barbore	Promax freestyle 2pc-bar, 65cm wide, 60 backsweep, 195mm rise, 25.4mm barbore	Promax freestyle 2pc-bar, 65cm wide, 60 backsweep, 195mm rise, 25.4mm barbore
<b>HANDLESTEM</b>	Zoom alloy, threaded, non-adjustable, alloy clamp, steel 15cm quill, 40mm extension, 22.2mm steerer, 30o rise	Promax freestyle ahead, 55mm rise, 4-bolt cap	Promax freestyle ahead, 55mm rise, 4-bolt cap
<b>SEAT POST</b>	Zoom steel tube, 25.4*250mm	Zoom steel tube, 25.4*250mm	Zoom steel tube, 25.4*250mm
<b>SPECIALS</b>	Fully closed chaincase, enduro fenders, training wheels	Gyro rotor, 4 pegs, 48 spokes/wheel, big platform pedals	Gyro rotor, 4 pegs, 48 spokes/wheel, big platform pedals


## FRAME GEOMETRY CHART

### FREEDER L

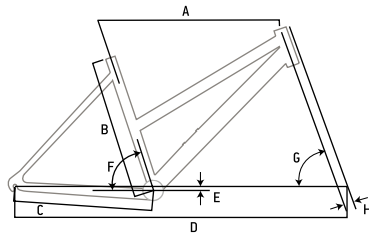


FRAME SIZE	380	410	460
A TOP TUBE	553	553	576
B SEAT TUBE	380	415	465
C REAR CENTER	425	425	425
D WHEEL BASE	1044	1044	1061
E B.B. DROP	38	38	38
F SEAT ANGLE	74°	74°	73°30'
G HEAD ANGLE	70°30'	70°30'	70°30'
H OFFSET	39	39	39

### CITYRUN L / INDIGO L

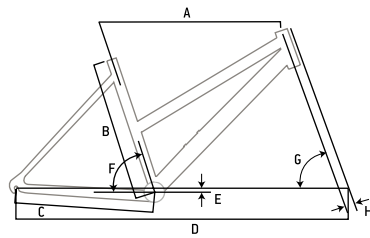


FRAME SIZE	400	440	480	520
A TOP TUBE	570	580	590	600
B SEAT TUBE	400	440	480	520
C REAR CENTER	440	440	440	440
D WHEEL BASE	1065	1075	1086	1096
E B.B. DROP	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45

### MEGISTO L / ERGOMAX L

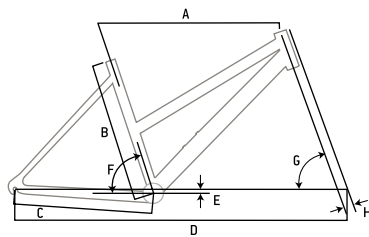


FRAME SIZE	400	440	480	520
A TOP TUBE	570	580	590	600
B SEAT TUBE	400	440	480	520
C REAR CENTER	440	440	440	440
D WHEEL BASE	1065	1075	1086	1096
E B.B. DROP	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45

### TESTEK L

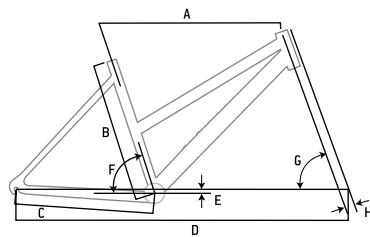


FRAME SIZE	420	470
A TOP TUBE	558	579
B SEAT TUBE	420	470
C REAR CENTER	435	435
D WHEEL BASE	1042	1064
E B.B. DROP	46	46
F SEAT ANGLE	73°	73°
G HEAD ANGLE	70°30'	70°30'
H OFFSET	38	38

### FUTOUR L / MULTIGO L / TRAVELON L

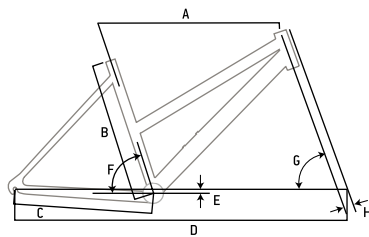


FRAME SIZE	400	440	480	520
A TOP TUBE	570	580	590	600
B SEAT TUBE	400	440	480	520
C REAR CENTER	440	440	440	440
D WHEEL BASE	1065	1075	1086	1096
E B.B. DROP	50	50	50	50
F SEAT ANGLE	73°	73°	73°	73°
G HEAD ANGLE	70°30'	70°30'	70°30'	70°30'
H OFFSET	45	45	45	45

### FUTOUR W / MULTIGO W / TRAVELON W

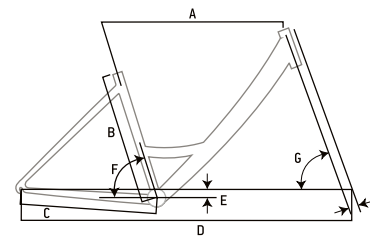


FRAME SIZE	400	460	530
A TOP TUBE	608	613	618
B SEAT TUBE	400	460	530
C REAR CENTER	460	460	460
D WHEEL BASE	1100	1105	1110
E B.B. DROP	50	50	50
F SEAT ANGLE	69°33'	69°33'	69°33'
G HEAD ANGLE	69°	69°	69°
H OFFSET	45	45	45

### EZIGO L

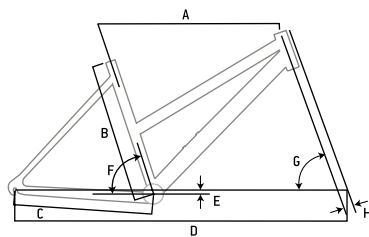

FRAME SIZE	400	460	530
A TOP TUBE	563	581	589
B SEAT TUBE	400	460	530
C REAR CENTER	450	450	450
D WHEEL BASE	1059	1079	1087
E B.B. DROP	55	55	55
F SEAT ANGLE	73°	73°	73°
G HEAD ANGLE	71°	71°	71°
H OFFSET	45	45	45

### EZIGO W

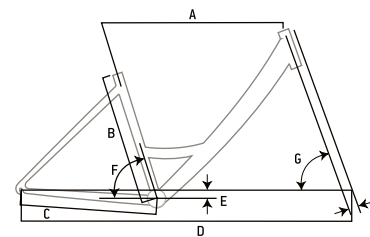

FRAME SIZE	400	460	530
A TOP TUBE	608	613	618
B SEAT TUBE	400	460	530
C REAR CENTER	460	460	460
D WHEEL BASE	1100	1105	1110
E B.B. DROP	50	50	50
F SEAT ANGLE	69°33'	69°33'	69°33'
G HEAD ANGLE	69°	69°	69°
H OFFSET	45	45	45





**AUSTRIA**

Feldmeier Bike GmbH  
Am Heidacker 4  
93309 Kelheim  
GERMANY  
Tel.: +49 (0) 9441-676060  
Fax.: +49 (0) 9441-676050  
E-mail: info@feldmeier-bike.de  
www.feldmeier-bike.de

**DENMARK, NORWAY,  
BALTIC STATES**

Intercycle A/S  
Tarupvej 63-65  
DK-5210 Odense NV  
DENMARK  
Tel.: +45 63168010  
Fax: +45 63168002  
E-mail: info@intercycle.dk

**CYPRUS**

Polys Pountouris & Sons Ltd  
Makedonitissis 84 ABC  
CY-28093 Nicosia - Strovolos  
CYPRUS  
Tel.: +357-22-511171  
Fax: +357-22-492024  
E-mail: polys.p@cytanet.com.cy

**GERMANY**

Feldmeier Bike GmbH  
Am Heidacker 4  
93309 Kelheim  
GERMANY  
Tel.: +49 (0) 9441-676060  
Fax.: +49 (0) 9441-676050  
E-mail: info@feldmeier-bike.de  
www.feldmeier-bike.de  
PLZ-Gebiet: 0-1-3-5-6-7-8-9

Fritz Wittich GmbH  
Auto- und Zweiradteile  
Hallenstr. 10-14  
33609 Bielefeld  
GERMANY  
Tel.: +49 (0) 521-9320441  
Fax.: +49 (0) 521-9320449  
E-mail: zweirad@wittich-gmbh.de  
www.wittich-gmbh.de  
PLZ-Gebiet: 2-3-4-5

**ISRAEL**

I.ZIOS Ltd  
Moshav Brachia 23  
ISRAEL  
Tel.: + 972 8 67 59 575  
E-mail: osag@walla.com

**THE NETHERLANDS &  
BELGIUM**

Matra Trading BV  
Keurweg 20  
5145 NX Waalwijk  
THE NETHERLANDS  
Tel.: +31-416-342012  
Fax: +31-416-650660  
E-mail: matraned@telebyte.nl

**MALTA**

Muscats Imports Ltd  
56 Triq is-Stazzjon  
BKR 12 Birkirkara  
MALTA  
Tel.: +356-21-227265  
Fax: +356-21-227265  
E-mail: musco@global.net.mt  
http://www.pedpowermalta.com

**PORTUGAL**

Nuno Viegas Costa unipessoal, lda.  
Rua Roberto Ivens,  
1623 1º esq. bloco c  
4450-257 Matosinhos  
PORTUGAL  
Tel.: + 3519 14 38 6838  
E-mail: vienuno@gmail.com

**ROMANIA**

Rom-Eurotrade S.R.L  
Bucharest West Industrial Park  
Equest Logistic Center (13th Km of A1 Highway  
Bucharest-Pitesti)  
Strada DE 287/1, Building E2, Unit A1-A2, 077096,  
Judetul Ilfov  
ROMANIA  
Tel.: +40 21 350 5624  
Fax: +40 21 350 5457  
E-mail: info@rom-eurotrade.ro

**SLOVENIA & CROATIA**

CS-Eurotrade d.o.o.  
Cesta krških žrtev 135  
8270 Krško  
SLOVENIA  
Tel.: +386-74-902500  
Fax: +386-74-902549  
E-mail: info@cs-eurotrade.com  
http://www.cs-eurotrade.com

**SWEDEN**

Cykloma AB  
Norra Obbolavägen 126  
S-90422 Umeå  
SWEDEN  
Tel.: +46-90-131960  
Fax: +46-90-131964  
E-mail: cykloma@swipnet.se  
http://www.idealcyklar.se

**TURKEY**

Olimpos Otomotiv San.ve Tic.Ltd.Sti.  
Altıyol, Cilek Sk., Cilek Han,  
No: 4/3 Kadıköy - Istanbul  
TURKEY  
Tel.: + 90 216 345 67 18  
E-mail: hasank@thule-tr.com

**NIKOS MANIATOPOULOS S.A.**  
INDUSTRIAL & TRADING CYCLE COMPANY

265 04 Ag. Vassilios, Patras, Greece  
Tel.: +30-2610 993045  
Fax: +30-2610 990424  
E-mail: commerce@idealbikes.gr

www.idealbikes.net